



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Nettrix


SPECspeed®2017\_int\_base = 14.7

R620 G50 (Intel Xeon Platinum 8568Y+, 2.30 GHz)

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jun-2024  
Hardware Availability: Dec-2023  
Software Availability: Jan-2024

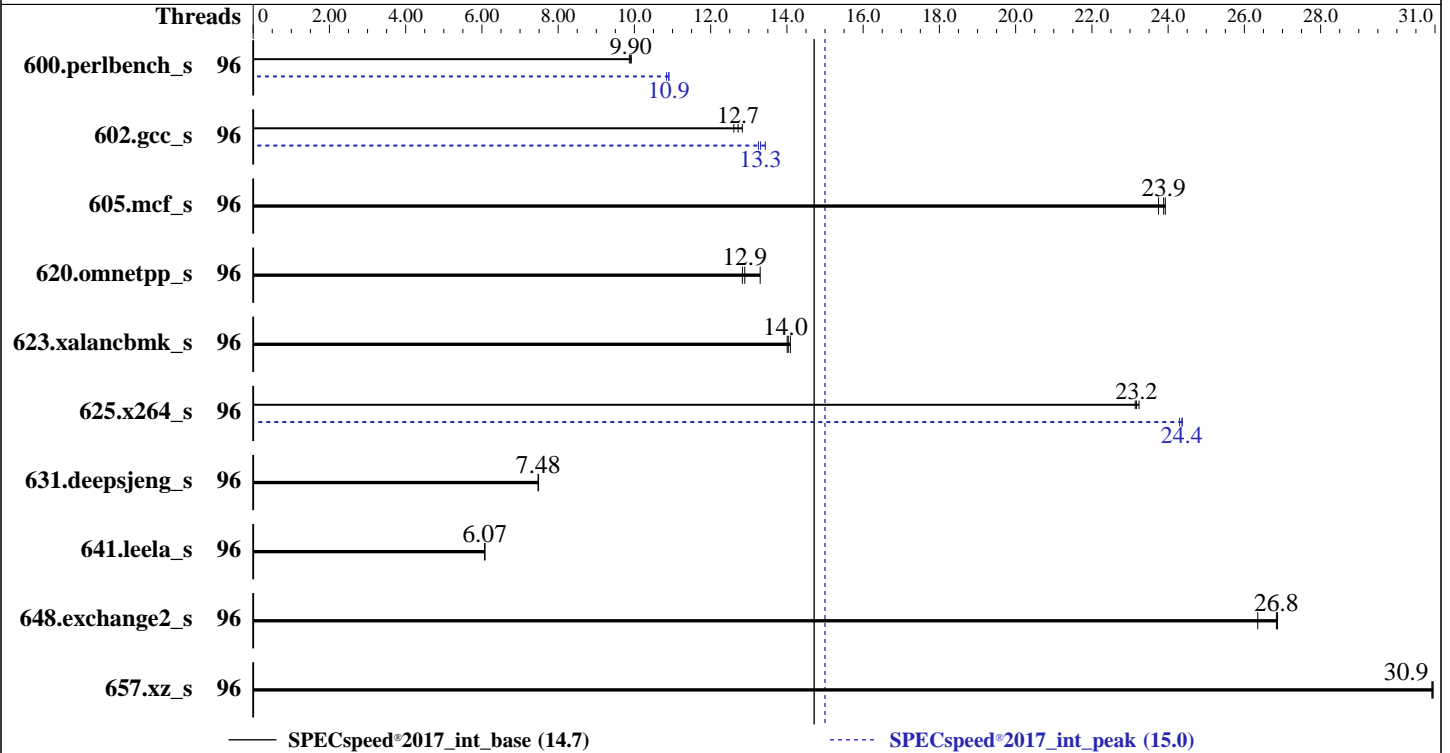

### Hardware

CPU Name: Intel Xeon Platinum 8568Y+  
Max MHz: 4000  
Nominal: 2300  
Enabled: 96 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 300 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)  
Storage: 1 x 14 TB SATA HDD (7200 rpm)  
Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
5.14.21-150500.53-default  
Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++  
Compiler for Linux;  
Fortran: Version 2023.2.3 of Intel Fortran  
Compiler for Linux;  
Parallel: Yes  
Firmware: Nettrix BIOS Version NNH1041268 released Jan-2024  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Nettrix

SPECSpeed®2017\_int\_base = 14.7

R620 G50 (Intel Xeon Platinum 8568Y+, 2.30 GHz)

SPECSpeed®2017\_int\_peak = 15.0

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jun-2024  
Hardware Availability: Dec-2023  
Software Availability: Jan-2024

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	96	180	9.87	179	9.92	<b>179</b>	<b>9.90</b>	96	164	10.8	<b>163</b>	<b>10.9</b>	163	10.9
602.gcc_s	96	316	12.6	310	12.8	<b>313</b>	<b>12.7</b>	96	<b>299</b>	<b>13.3</b>	300	13.3	296	13.4
605.mcf_s	96	<b>198</b>	<b>23.9</b>	197	23.9	199	23.7	96	<b>198</b>	<b>23.9</b>	197	23.9	199	23.7
620.omnetpp_s	96	<b>126</b>	<b>12.9</b>	123	13.3	127	12.8	96	<b>126</b>	<b>12.9</b>	123	13.3	127	12.8
623.xalancbmk_s	96	<b>101</b>	<b>14.0</b>	101	14.1	101	14.0	96	<b>101</b>	<b>14.0</b>	101	14.1	101	14.0
625.x264_s	96	<b>76.1</b>	<b>23.2</b>	75.9	23.2	76.2	23.1	96	72.6	24.3	<b>72.4</b>	<b>24.4</b>	72.4	24.4
631.deepsjeng_s	96	<b>192</b>	<b>7.48</b>	191	7.49	192	7.48	96	<b>192</b>	<b>7.48</b>	191	7.49	192	7.48
641.leela_s	96	281	6.07	281	6.08	<b>281</b>	<b>6.07</b>	96	281	6.07	281	6.08	<b>281</b>	<b>6.07</b>
648.exchange2_s	96	112	26.4	109	26.9	<b>110</b>	<b>26.8</b>	96	112	26.4	109	26.9	<b>110</b>	<b>26.8</b>
657.xz_s	96	200	30.9	200	30.9	<b>200</b>	<b>30.9</b>	96	200	30.9	200	30.9	<b>200</b>	<b>30.9</b>

SPECSpeed®2017\_int\_base = **14.7**

SPECSpeed®2017\_int\_peak = **15.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/tzk/SPECcpu/lib/intel64:/home/tzk/SPECcpu/lib/ia32:/home/tzk/SPECcpu/je5.0.1-64"  
MALLOCONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
NA : The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Nettrix

SPECspeed®2017\_int\_base = 14.7

R620 G50 (Intel Xeon Platinum 8568Y+, 2.30 GHz)

SPECspeed®2017\_int\_peak = 15.0

**CPU2017 License:** 6138  
**Test Sponsor:** Nettrix  
**Tested by:** Nettrix

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Jan-2024

## Platform Notes

### BIOS Configuration:

SNC (Sub NUMA) set to Enable SNC2 (2-clusters)  
Patrol Scrub set to Disabled  
LLC dead line alloc set to Disabled  
DCU Streamer Prefetcher set to Disabled  
Hardware P-States set to Native Mode  
Enable LP [Global] set to Single LP

Sysinfo program /home/tzk/SPECcpu/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Wed Jun 12 11:13:51 2024

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
11:13:51 up 1:19, 2 users, load average: 0.01, 1.35, 1.90
USER      TTY      FROM          LOGIN@      IDLE        JCPU        PCPU WHAT
root     tty1      -              11:13       7.00s      0.78s      0.02s python3 SetPrefetch.py -t intspeed -f
/home/tzk/SPECcpu/result/CPU2017.552.log
root     pts/0    10.2.49.197   10:01       1:11       0.21s      0.21s -bash
```

```
3. Username
From environment variable $USER: root
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Nettrix

SPECspeed®2017\_int\_base = 14.7

R620 G50 (Intel Xeon Platinum 8568Y+, 2.30 GHz)

SPECspeed®2017\_int\_peak = 15.0

**CPU2017 License:** 6138  
**Test Sponsor:** Nettrix  
**Tested by:** Nettrix

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Jan-2024

### Platform Notes (Continued)

```

4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size          (kbytes, -d) unlimited
   scheduling priority     (-e) 0
   file size              (blocks, -f) unlimited
   pending signals        (-i) 4125140
   max locked memory      (kbytes, -l) 64
   max memory size        (kbytes, -m) unlimited
   open files             (-n) 1024
   pipe size              (512 bytes, -p) 8
   POSIX message queues   (bytes, -q) 819200
   real-time priority     (-r) 0
   stack size             (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes     (-u) 4125140
   virtual memory         (kbytes, -v) unlimited
   file locks             (-x) unlimited

```

```

-----
5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize 30
   login -- root
   -bash
   -bash
   runcpu --nobuild --action validate --define default-platform-flags -c
     ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=96 --tune base,peak -o all --define
     intspeedaffinity --define drop_caches intspeed
   runcpu --nobuild --action validate --define default-platform-flags --configfile
     ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=96 --tune base,peak --output_format all
     --define intspeedaffinity --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed
     intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.552/templogs/preenv.intspeed.552.0.log
     --lognum 552.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /home/tzk/SPECcpu

```

```

-----
6. /proc/cpuinfo
   model name      : INTEL(R) XEON(R) PLATINUM 8568Y+
   vendor_id      : GenuineIntel
   cpu family     : 6
   model          : 207
   stepping       : 2
   microcode      : 0x21000200
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
   cpu cores      : 48
   siblings       : 48
   2 physical ids (chips)
   96 processors (hardware threads)
   physical id 0: core ids 0-47
   physical id 1: core ids 0-47
   physical id 0: apicids
   0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
   ,74,76,78,80,82,84,86,88,90,92,94
   physical id 1: apicids
   128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
   80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems. Use the above data carefully.

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Nettrix

SPECspeed®2017\_int\_base = 14.7

R620 G50 (Intel Xeon Platinum 8568Y+, 2.30 GHz)

SPECspeed®2017\_int\_peak = 15.0

**CPU2017 License:** 6138  
**Test Sponsor:** Nettrix  
**Tested by:** Nettrix

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Jan-2024

## Platform Notes (Continued)

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:   0-95
Vendor ID:             GenuineIntel
Model name:            INTEL(R) XEON(R) PLATINUM 8568Y+
CPU family:            6
Model:                 207
Thread(s) per core:    1
Core(s) per socket:    48
Socket(s):              2
Stepping:              2
CPU max MHz:           4000.0000
CPU min MHz:           800.0000
BogoMIPS:              4600.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vmni flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                        bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512v1
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
                        hwp_act_window hwp_epp hwp_pkg_req hfi avx512vbmi umip pku ospke waitpkg
                        avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                        avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             4.5 MiB (96 instances)
L1i cache:             3 MiB (96 instances)
L2 cache:              192 MiB (96 instances)
L3 cache:              600 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-23
NUMA node1 CPU(s):    24-47
NUMA node2 CPU(s):    48-71
NUMA node3 CPU(s):    72-95
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:     Not affected
Vulnerability Mds:      Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                        sequence
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Nettrix

SPECspeed®2017\_int\_base = 14.7

R620 G50 (Intel Xeon Platinum 8568Y+, 2.30 GHz)

SPECspeed®2017\_int\_peak = 15.0

**CPU2017 License:** 6138  
**Test Sponsor:** Nettrix  
**Tested by:** Nettrix

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Jan-2024

### Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	300M	600M	20	Unified	3	245760	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-23
node 0 size: 257562 MB
node 0 free: 251660 MB
node 1 cpus: 24-47
node 1 size: 258041 MB
node 1 free: 257466 MB
node 2 cpus: 48-71
node 2 size: 258041 MB
node 2 free: 257666 MB
node 3 cpus: 72-95
node 3 size: 257669 MB
node 3 free: 257161 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1056067684 kB

10. who -r

run-level 3 Jun 12 09:54

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd chronyd cron cups firewalld getty@
haveged irqbalance issue-generator kbdsettings kdump kdump-early klog lm_sensors
lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wickedd
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled apcupsd autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates
chrony-wait console-getty corosync corosync-notifyd crm_mon ctdb cups-browsed debug-shell
dml dmraid-activation drbd drbd-lvchange@ drbd-wait-promotable@ ebttables
exchange-bmc-os-info fancontrol gpm grub2-once haveged-switch-root hawk ipmi ipmievd
ipvsadm issue-add-ssh-keys kexec-load ldirectord logd lunmask lvmlockd lvmlocks
man-db-create multipathd nfs nfs-blkmap pacemaker rpcbind rpmconfigcheck rsyncd sanlock
sbd sbd_remote serial-getty@ smartd_generate_opts snmpd snmptrapd svnserve
systemd-boot-check-no-failures systemd-network-generator systemd-sysext

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Nettrix

SPECspeed®2017\_int\_base = 14.7

R620 G50 (Intel Xeon Platinum 8568Y+, 2.30 GHz)

SPECspeed®2017\_int\_peak = 15.0

**CPU2017 License:** 6138  
**Test Sponsor:** Nettrix  
**Tested by:** Nettrix

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Jan-2024

### Platform Notes (Continued)

indirect systemd-time-wait-sync systemd-timesyncd tuned udisks2 wdm  
wicked

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default  
root=UUID=aec0cd35-b79c-432e-8a92-68e81aa94bbb  
splash=silent  
resume=/dev/disk/by-uuid/d53caa22-ee5c-46fa-a8f2-44d678cc6069  
mitigations=auto  
quiet  
security=apparmor  
crashkernel=317M,high  
crashkernel=72M,low  
default\_hugepagesz=1G

-----  
14. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 800 MHz and 4.00 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
  
boost state support:  
Supported: yes  
Active: yes

-----  
15. tuned-adm active  
It seems that tuned daemon is not running, preset profile is not activated.  
Preset profile: throughput-performance

-----  
16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 5000  
vm.dirty\_ratio 30  
vm.dirty\_writeback\_centisecs 700  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 10  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0

-----  
17. /sys/kernel/mm/transparent\_hugepage  
defrag always defer defer+madvice [madvice] never  
enabled [always] madvice never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Nettrix

SPECspeed®2017\_int\_base = 14.7

R620 G50 (Intel Xeon Platinum 8568Y+, 2.30 GHz)

SPECspeed®2017\_int\_peak = 15.0

**CPU2017 License:** 6138  
**Test Sponsor:** Nettrix  
**Tested by:** Nettrix

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Jan-2024

### Platform Notes (Continued)

```

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

```

```

19. OS release
From /etc/*-release /etc/*-version
os-release openSUSE Leap 15.5

```

```

20. Disk information
SPEC is set to: /home/tzk/SPECcpu
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 12T 249G 12T 3% /home

```

```

21. /sys/devices/virtual/dmi/id
Vendor: Nettrix
Product: R620 G50
Product Family: Rack
Serial: 6101810603447812

```

```

22. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x Hynix HMC94AGBRA179N 64 GB 2 rank 5600

```

```

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: NNH1041268
BIOS Date: 01/26/2024
BIOS Revision: 5.32

```

### Compiler Version Notes

```

=====
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
  | 657.xz_s(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

```

```

=====
C++ | 620.omnetpp_s(base, peak) 623.xalanbmk_s(base, peak) 631.deepsjeng_s(base, peak)
    | 641.leela_s(base, peak)
=====

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

SPECspeed®2017\_int\_base = 14.7

R620 G50 (Intel Xeon Platinum 8568Y+, 2.30 GHz)

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jun-2024  
Hardware Availability: Dec-2023  
Software Availability: Jan-2024

## Compiler Version Notes (Continued)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 648.exchange2\_s(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC\_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Nettrix

SPECspeed®2017\_int\_base = 14.7

R620 G50 (Intel Xeon Platinum 8568Y+, 2.30 GHz)

SPECspeed®2017\_int\_peak = 15.0

CPU2017 License: 6138

Test Sponsor: Nettrix

Tested by: Nettrix

Test Date: Jun-2024

Hardware Availability: Dec-2023

Software Availability: Jan-2024

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Nettrix

SPECspeed®2017\_int\_base = 14.7

R620 G50 (Intel Xeon Platinum 8568Y+, 2.30 GHz)

SPECspeed®2017\_int\_peak = 15.0

**CPU2017 License:** 6138  
**Test Sponsor:** Nettrix  
**Tested by:** Nettrix

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Jan-2024

## Peak Optimization Flags (Continued)

602.gcc\_s (continued):

```
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

605.mcf\_s: basepeak = yes

```
625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-06-11 23:13:51-0400.  
Report generated on 2024-07-03 09:19:58 by CPU2017 PDF formatter v6716.  
Originally published on 2024-07-02.