



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_fp_base = 333

SPECrate®2017_fp_peak = 339

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

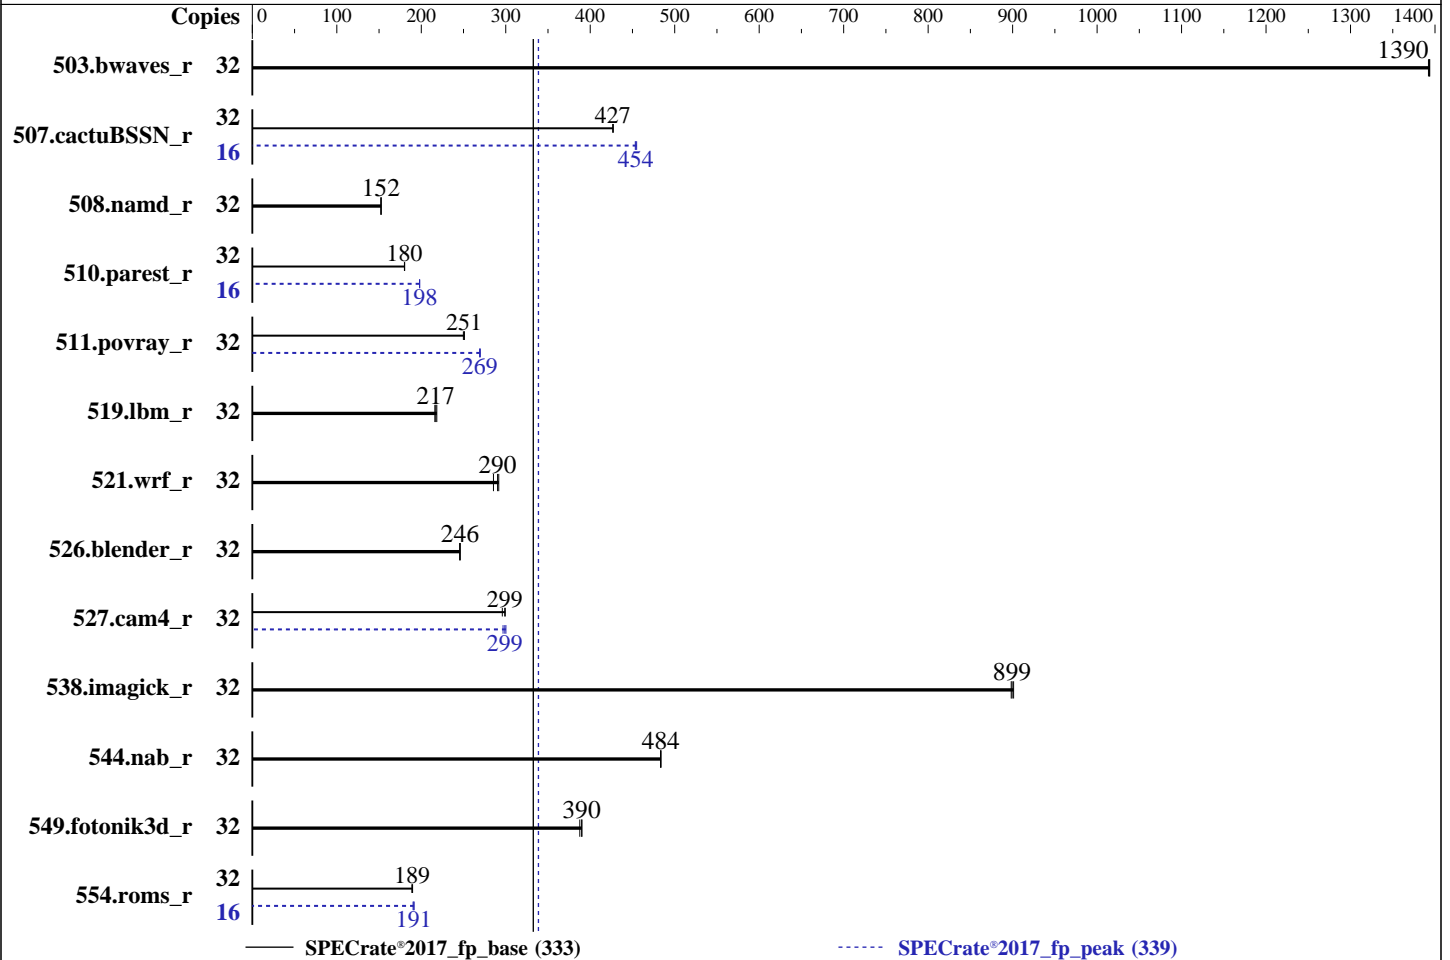

Hardware

CPU Name: Intel Xeon Gold 6534
 Max MHz: 4200
 Nominal: 3900
 Enabled: 16 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 22.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)
 Storage: 1 x 1.6 TB PCIe NVMe SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise High Performance Computing 15 SP5 (x86_64) Kernel 5.14.21-150500.53-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 2201 released Dec-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_fp_base = 333

SPECrate®2017_fp_peak = 339

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	230	1390	230	1390	<u>230</u>	<u>1390</u>	32	230	1390	230	1390	<u>230</u>	<u>1390</u>
507.cactuBSSN_r	32	94.8	427	94.9	427	<u>94.9</u>	<u>427</u>	16	<u>44.6</u>	<u>454</u>	44.5	455	44.7	453
508.namd_r	32	200	152	199	152	<u>200</u>	<u>152</u>	32	200	152	199	152	<u>200</u>	<u>152</u>
510.parest_r	32	<u>464</u>	<u>180</u>	465	180	464	180	16	211	198	<u>211</u>	<u>198</u>	211	198
511.povray_r	32	<u>298</u>	<u>251</u>	299	250	298	251	32	277	270	<u>277</u>	<u>269</u>	278	269
519.lbm_r	32	154	218	156	216	<u>155</u>	<u>217</u>	32	154	218	156	216	<u>155</u>	<u>217</u>
521.wrf_r	32	246	292	251	285	<u>247</u>	<u>290</u>	32	246	292	251	285	<u>247</u>	<u>290</u>
526.blender_r	32	198	246	199	245	<u>198</u>	<u>246</u>	32	198	246	199	245	<u>198</u>	<u>246</u>
527.cam4_r	32	189	296	<u>187</u>	<u>299</u>	187	299	32	186	300	189	297	<u>187</u>	<u>299</u>
538.imagick_r	32	88.6	898	88.3	901	<u>88.5</u>	<u>899</u>	32	88.6	898	88.3	901	<u>88.5</u>	<u>899</u>
544.nab_r	32	111	483	111	484	<u>111</u>	<u>484</u>	32	111	483	111	484	<u>111</u>	<u>484</u>
549.fotonik3d_r	32	322	388	320	390	<u>320</u>	<u>390</u>	32	322	388	320	390	<u>320</u>	<u>390</u>
554.roms_r	32	268	190	<u>269</u>	<u>189</u>	269	189	16	133	191	134	190	<u>133</u>	<u>191</u>

SPECrate®2017_fp_base = **333**

SPECrate®2017_fp_peak = **339**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/ic24u1/lib/intel64:/ic24u1/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_fp_base = 333

SPECrate®2017_fp_peak = 339

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

VT-d = Disabled
 Patrol Scrub = Disabled
 SNC = Enable SNC2 (2-clusters)
 LLC dead line allc = Disabled
 Engine Boost = Aggressive
 SR-IOV Support = Disabled
 BMC Configuration:
 Fan mode = Full speed mode

Sysinfo program /ic24ul/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Sun Jul 14 13:51:12 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

 1. uname -a
 Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_fp_base = 333

SPECrate®2017_fp_peak = 339

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Platform Notes (Continued)

x86_64 x86_64 x86_64 GNU/Linux

```

-----
2. w
 13:51:12 up 1 day, 23:39,  2 users,  load average: 22.04, 29.54, 30.97
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1     -             Fri14   47:38m 0.84s  0.00s /bin/bash ./rate.sh
root      tty2     -             Fri14   46:46m 0.05s  0.05s -bash

```

```

-----
3. Username
  From environment variable $USER:  root

```

```

-----
4. ulimit -a
 core file size          (blocks, -c) unlimited
 data seg size           (kbytes, -d) unlimited
 scheduling priority     (-e) 0
 file size               (blocks, -f) unlimited
 pending signals        (-i) 4126979
 max locked memory      (kbytes, -l) 64
 max memory size        (kbytes, -m) unlimited
 open files             (-n) 1024
 pipe size              (512 bytes, -p) 8
 POSIX message queues   (bytes, -q) 819200
 real-time priority     (-r) 0
 stack size             (kbytes, -s) unlimited
 cpu time               (seconds, -t) unlimited
 max user processes     (-u) 4126979
 virtual memory         (kbytes, -v) unlimited
 file locks            (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./rate.sh
/bin/bash ./rate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 -c
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=16 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 --configfile
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=16 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.252/templogs/preenv.fprate.252.0.log --lognum 252.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /ic24u1

```

```

-----
6. /proc/cpuinfo
 model name      : INTEL(R) XEON(R) GOLD 6534
 vendor_id      : GenuineIntel
 cpu family     : 6
 model          : 207
 stepping       : 2
 microcode      : 0x21000200
 bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
 cpu cores     : 8

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_fp_base = 333

SPECrate®2017_fp_peak = 339

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Platform Notes (Continued)

```
siblings          : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 0: apicids 0-15
physical id 1: apicids 128-143
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 32
On-line CPU(s) list:   0-31
Vendor ID:              GenuineIntel
Model name:             INTEL(R) XEON(R) GOLD 6534
CPU family:             6
Model:                  207
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):              2
Stepping:               2
CPU max MHz:            4200.0000
CPU min MHz:            800.0000
BogoMIPS:               7800.00
Flags:                  fpu_vme_de_pse_tsc_msr_pae_mce_cx8_apic_sep_mtrr_pge_mca_cmov_pat_pse36
                        clflush_dts_acpi_mmx_fxsr_sse_sse2_ss_ht_tm_pbe_syscall_nx_pdpelgb_rdtscp
                        lm_constant_tsc_art_arch_perfmmon_pebs_bts_rep_good_nopl_xtopology
                        nonstop_tsc_cpuid_aperfperf_tsc_known_freq_pni_pclmulqdq_dtes64_monitor
                        ds_cpl_vmx_smx_est_tm2_ssse3_sdbg_fma_cx16_xtpr_pdc_m_pcid_dca_sse4_1
                        sse4_2_x2apic_movbe_popcnt_tsc_deadline_timer_aes_xsaves_avx_f16c_rdrand
                        lahf_lm_abm_3dnowprefetch_cpuid_fault_epb_cat_l3_cat_l2_cdp_l3
                        invpcid_single_cdp_l2_ssbd_mba_ibrs_ibpb_stibp_ibrs_enhanced_tpr_shadow
                        vnmi_flexpriority_ept_vpid_ept_ad_fgsgbase_tsc_adjust_bmi1_hle_avx2_smep
                        bmi2_erms_invpcid_rtm_cqm_rdt_a_avx512f_avx512dq_rdseed_adx_smmap
                        avx512ifma_clflushopt_clwb_intel_pt_avx512cd_sha_ni_avx512bw_avx512vl
                        xsaveopt_xsaves_xgetbv1_xsaves_cqm_llc_cqm_occup_llc_cqm_mbm_total
                        cqm_mbm_local_avx_vnni_avx512_bf16_wbnoinvd_dtherm_ida_arat_pln_pts_hwp
                        hwp_act_window_hwp_epp_hwp_pkg_req_avx512vbmi_umip_pku_ospke_waitpkg
                        avx512_vbmi2_gfni_vaes_vpclmulqdq_avx512_vnni_avx512_bitalg_tme
                        avx512_vpoperntdq_la57_rdpid_bus_lock_detect_cldemote_movdiri_movdir64b
                        enqcmd_fsrn_md_clear_serialize_tsxldtrk_pconfig_arch_lbr_avx512_fp16
                        amx_tile_flush_lld_arch_capabilities
Virtualization:        VT-x
L1d cache:             768 KiB (16 instances)
L1i cache:             512 KiB (16 instances)
L2 cache:              32 MiB (16 instances)
L3 cache:              45 MiB (2 instances)
NUMA node(s):          4
NUMA node0 CPU(s):    0-3,16-19
NUMA node1 CPU(s):    4-7,20-23
NUMA node2 CPU(s):    8-11,24-27
NUMA node3 CPU(s):    12-15,28-31
Vulnerability Itlb multihit: Not affected
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_fp_base = 333

SPECrate®2017_fp_peak = 339

CPU2017 License: 9016
Test Sponsor: ASUSTeK Computer Inc.
Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2024
Hardware Availability: Dec-2023
Software Availability: Mar-2024

Platform Notes (Continued)

Vulnerability Lltdf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW sequence
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	2M	32M	16	Unified	2	2048	1	64
L3	22.5M	45M	15	Unified	3	24576	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-3,16-19
node 0 size: 257649 MB
node 0 free: 248988 MB
node 1 cpus: 4-7,20-23
node 1 size: 258045 MB
node 1 free: 253856 MB
node 2 cpus: 8-11,24-27
node 2 size: 258045 MB
node 2 free: 253905 MB
node 3 cpus: 12-15,28-31
node 3 size: 258033 MB
node 3 free: 253906 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1056537564 kB

10. who -r

run-level 3 Jul 12 14:11

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_fp_base = 333

SPECrate®2017_fp_peak = 339

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Platform Notes (Continued)

```

enabled-runtime  postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4
disabled        wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
                systemd-remount-fs
                autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                firewallld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd
                issue-add-ssh-keys kexec-load lunmask man-db-create multipathd ndctl-monitor nfs
                nfs-blkmap nvme-autoconnect rpcbind rpmconfigcheck rsyncd serial-getty@
                smartd_generate_opts snmpd snmptrapd svnservice systemd-boot-check-no-failures
                systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
                udisks2 vncserver@
indirect        wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=1821a225-9785-4821-9a33-99bd3ded8cae
splash=silent
mitigations=auto
quiet
security=apparmor

```

14. cpupower frequency-info

```

analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.20 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
boost state support:
  Supported: yes
  Active: yes

```

15. tuned-adm active

```

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: latency-performance

```

16. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_fp_base = 333

SPECrate®2017_fp_peak = 339

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Platform Notes (Continued)

```

17. /sys/kernel/mm/transparent_hugepage
   defrag          always defer defer+madvice [madvice] never
   enabled         [always] madvice never
   hpage_pmd_size 2097152
   shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs 60000
   defrag                 1
   max_ptes_none          511
   max_ptes_shared        256
   max_ptes_swap          64
   pages_to_scan          4096
   scan_sleep_millisecs  10000

```

```

-----
19. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise High Performance Computing 15 SP5

```

```

-----
20. Disk information
   SPEC is set to: /ic24ul
   Filesystem      Type  Size  Used Avail Use% Mounted on
   /dev/nvme0n1p8 xfs   1.3T 126G 1.1T  11% /

```

```

-----
21. /sys/devices/virtual/dmi/id
   Vendor:          ASUSTeK COMPUTER INC.
   Product:         RS720-E11-RS12U
   Product Family:  Server
   Serial:          R1S0MD000002

```

```

-----
22. dmidecode
   Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M321R8GA0PB0-CWMXJ 64 GB 2 rank 5600, configured at 4800

```

```

-----
23. BIOS
   (This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:      American Megatrends Inc.
   BIOS Version:     2201
   BIOS Date:        12/22/2023
   BIOS Revision:    22.1

```

Compiler Version Notes

```

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_fp_base = 333

SPECrate®2017_fp_peak = 339

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Compiler Version Notes (Continued)

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_fp_base = 333

SPECrate®2017_fp_peak = 339

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_fp_base = 333

SPECrate®2017_fp_peak = 339

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapfirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapfirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_fp_base = 333

SPECrate®2017_fp_peak = 339

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U
(3.90 GHz, Intel Xeon Gold 6534)

SPECrate®2017_fp_base = 333

SPECrate®2017_fp_peak = 339

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jul-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z13-V1.3.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z13-V1.3.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-07-14 01:51:11-0400.

Report generated on 2024-07-30 19:33:17 by CPU2017 PDF formatter v6716.

Originally published on 2024-07-30.