



# SPEC<sup>®</sup> MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX  
(AMD Opteron 6180 SE, 2.5GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 7.65

MPI2007 license: 4


Test sponsor: SGI

Tested by: SGI

Test date: Jun-2011

Hardware Availability: Mar-2011

Software Availability: Aug-2011

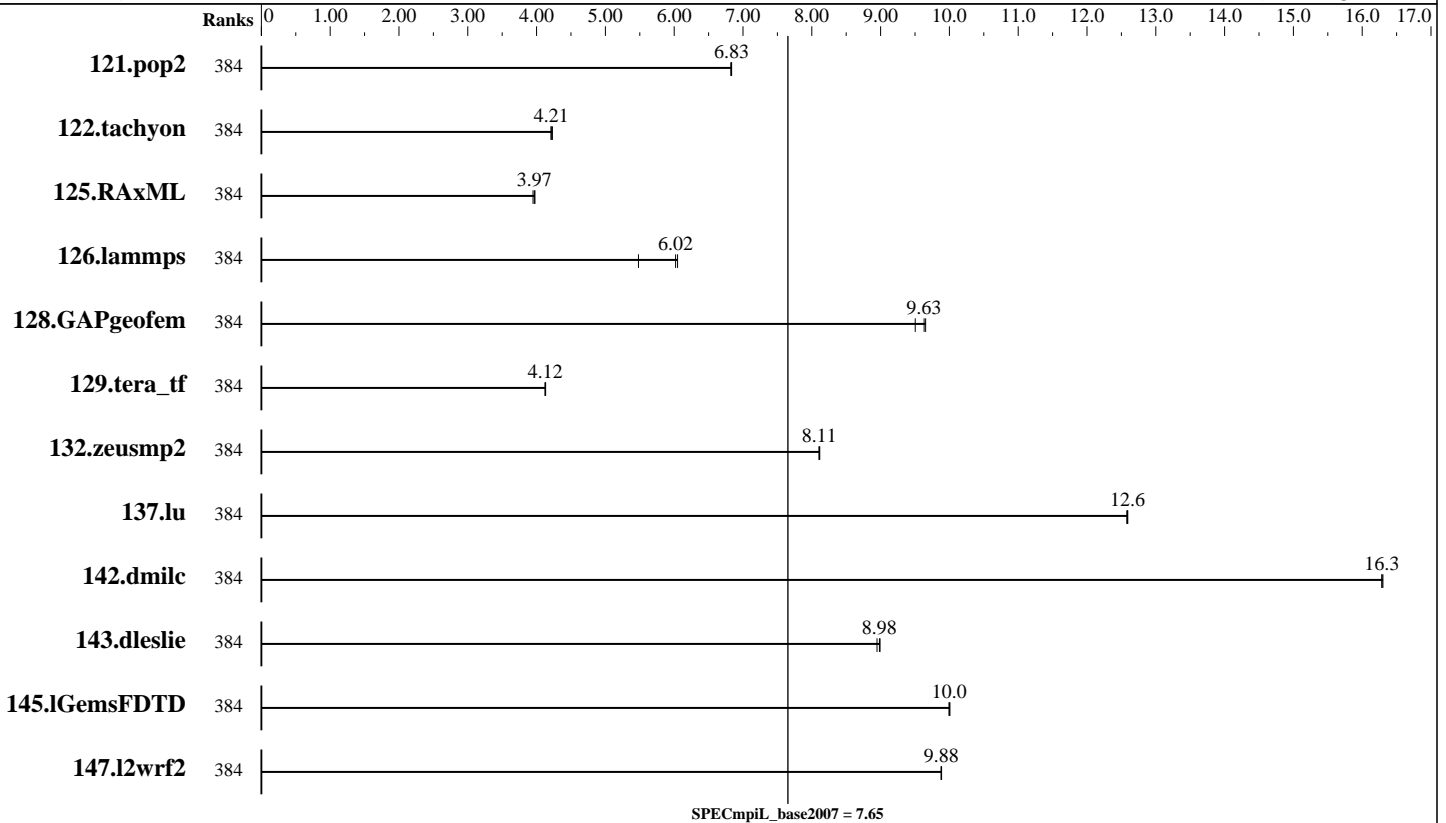

## Results Table

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
121.pop2	384	<b>569</b>	<b>6.83</b>	569	6.83	570	6.82							
122.tachyon	384	462	4.21	<b>461</b>	<b>4.21</b>	460	4.23							
125.RAxML	384	<b>736</b>	<b>3.97</b>	739	3.95	734	3.98							
126.lammps	384	449	5.48	<b>408</b>	<b>6.02</b>	406	6.05							
128.GAPgeofem	384	624	9.50	615	9.65	<b>616</b>	<b>9.63</b>							
129.tera_tf	384	266	4.13	266	4.12	<b>266</b>	<b>4.12</b>							
132.zeusmp2	384	261	8.12	<b>261</b>	<b>8.11</b>	262	8.10							
137.lu	384	334	12.6	<b>334</b>	<b>12.6</b>	334	12.6							
142.dmilc	384	226	16.3	<b>226</b>	<b>16.3</b>	226	16.3							
143.dleslie	384	345	8.99	346	8.95	<b>345</b>	<b>8.98</b>							
145.lGemsFDTD	384	<b>441</b>	<b>10.0</b>	441	10.0	441	10.0							
147.l2wrf2	384	<b>830</b>	<b>9.88</b>	830	9.88	830	9.89							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SPECmpiL\_peak2007 = Not Run

SGI Altix ICE 8400EX  
(AMD Opteron 6180 SE, 2.5GHz)

SPECmpiL\_base2007 = 7.65

MPI2007 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2011

Hardware Availability: Mar-2011

Software Availability: Aug-2011

### Hardware Summary

Type of System: Homogeneous  
 Compute Node: SGI Altix ICE 8400EX Compute Node  
 Interconnect: InfiniBand (MPI and I/O)  
 File Server Node: SGI InfiniteStorage 4000  
 Total Compute Nodes: 16  
 Total Chips: 32  
 Total Cores: 384  
 Total Threads: 384  
 Total Memory: 1 TB  
 Base Ranks Run: 384  
 Minimum Peak Ranks: --  
 Maximum Peak Ranks: --

### Software Summary

C Compiler: Intel C++ Composer XE 2011 for Linux, Version 12.0.3.174 Build 20110309  
 C++ Compiler: Intel C++ Composer XE 2011 for Linux, Version 12.0.3.174 Build 20110309  
 Fortran Compiler: Intel Fortran Composer XE 2011 for Linux, Version 12.0.3.174 Build 20110309  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 MPI Library: SGI MPT 2.04 Patch 10789  
 Other MPI Info: OFED 1.4.2  
 Pre-processors: None  
 Other Software: None

## Node Description: SGI Altix ICE 8400EX Compute Node

### Hardware

Number of nodes: 16  
 Uses of the node: compute  
 Vendor: SGI  
 Model: SGI Altix ICE 8400EX (AMD Opteron 6180 SE, 2.5GHz)  
 CPU Name: AMD Opteron 6180 SE  
 CPU(s) orderable: 1-2 chips  
 Chips enabled: 2  
 Cores enabled: 24  
 Cores per chip: 12  
 Threads per core: 1  
 CPU Characteristics: 12 Cores/chip, 2.5 GHz  
 CPU MHz: 2500  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores  
 Other Cache: None  
 Memory: 64 GB (16 x 4 GB, 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: None  
 Other Hardware: None  
 Adapter: Mellanox MT26428 ConnectX IB QDR (PCIe x8 Gen2 5 GT/s)  
 Number of Adapters: 1  
 Slot Type: PCIe x8 Gen2  
 Data Rate: InfiniBand 4x QDR  
 Ports Used: 2  
 Interconnect Type: InfiniBand

### Software

Adapter: Mellanox MT26428 ConnectX IB QDR (PCIe x8 Gen2 5 GT/s)  
 Adapter Driver: OFED-1.4.2  
 Adapter Firmware: 2.7.0  
 Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64) Kernel 2.6.32.27-0.2-default  
 Local File System: NFSv3  
 Shared File System: NFSv3 IPoIB  
 System State: Run Level 3 (Multi-User)  
 Other Software: SGI Performance Suite 1.0, Build 702r19.sles11-1010072114  
 SGI Tempo Compute Node 2.2, Build 702r19.sles11-1010072114



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX  
(AMD Opteron 6180 SE, 2.5GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 7.65

MPI2007 license: 4  
Test sponsor: SGI  
Tested by: SGI

Test date: Jun-2011  
Hardware Availability: Mar-2011  
Software Availability: Aug-2011

### Node Description: SGI InfiniteStorage 4000

#### Hardware

Number of nodes: 1  
Uses of the node: fileserver  
Vendor: SGI  
Model: SGI Altix 450 (Intel Itanium 2, 1.6GHz)  
CPU Name: Intel Itanium 2 9030  
CPU(s) orderable: 2-38 chips  
Chips enabled: 2  
Cores enabled: 4  
Cores per chip: 2  
Threads per core: 1  
CPU Characteristics: 1.6GHz/8MB, 533MHz FSB  
CPU MHz: 1600  
Primary Cache: 16 KB I + 16 KB D on chip per core  
Secondary Cache: 1 MB I + 256 KB D on chip per core  
L3 Cache: 4 MB I+D on chip per core  
Other Cache: None  
Memory: 24 GB (12 x 2 GB, 2Rx4 PC2-3200-3, ECC)  
Disk Subsystem: 16 TB RAID 5  
32 x 500 GB SATA (Seagate Barracuda 7.2K)  
Other Hardware: None  
Adapter: Mellanox MT25208 InfiniHost III Ex (PCIe x8 Gen1 2.5 GT/s)  
Number of Adapters: 2  
Slot Type: PCIe x8 Gen1  
Data Rate: InfiniBand 4x DDR  
Ports Used: 2  
Interconnect Type: InfiniBand

#### Software

Adapter: Mellanox MT25208 InfiniHost III Ex (PCIe x8 Gen1 2.5 GT/s)  
Adapter Driver: OFED-1.4.2  
Adapter Firmware: 5.3.0  
Operating System: SUSE Linux Enterprise Server 11 SP1 (ia64) Kernel 2.6.32.12-0.7-default  
Local File System: xfs  
Shared File System: --  
System State: Run Level 3 (Multi-User)  
Other Software: SGI ProPack 7SP1 for Linux, Build 701r2.sles11-1005242307

### Interconnect Description: InfiniBand (MPI and I/O)

#### Hardware

Vendor: Mellanox Technologies  
Model: None  
Switch Model: Mellanox Infiniscale-IV  
Number of Switches: 2  
Number of Ports: 36  
Data Rate: InfiniBand 4x QDR  
Firmware: 5040005  
Topology: Enhanced HyperCube  
Primary Use: MPI and I/O traffic

#### Software



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX  
(AMD Opteron 6180 SE, 2.5GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 7.65

MPI2007 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2011

Hardware Availability: Mar-2011

Software Availability: Aug-2011

## Submit Notes

The config file option 'submit' was used.

## General Notes

Software environment:

```
export MPI_REQUEST_MAX=65536
```

```
export MPI_TYPE_MAX=32768
```

```
export MPI_BUFS_THRESHOLD=1
```

```
ulimit -s unlimited
```

BIOS settings:

```
AMI BIOS version 1.0a
```

Job Placement:

Each MPI job is assigned to a topologically compact set of nodes, i.e. the minimal needed number of switches was used for each job: 1 switch for up to 192 ranks, 2 switches for 384 ranks, 4 switches for 768 ranks, 8 switches for 1536 ranks and 16 switches for 3072 ranks.

## Base Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
126.lammps: icpc
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icc ifort
```

## Base Portability Flags

```
121.pop2: -DSPEC_MPI_CASE_FLAG
```

## Base Optimization Flags

C benchmarks:

```
-O3 -xSSE2 -no-prec-div
```

Continued on next page



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI Altix ICE 8400EX  
(AMD Opteron 6180 SE, 2.5GHz)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 7.65

MPI2007 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2011

Hardware Availability: Mar-2011

Software Availability: Aug-2011

## Base Optimization Flags (Continued)

C++ benchmarks:

126.lammps: -O3 -xSSE2 -no-prec-div -ansi-alias

Fortran benchmarks:

-O3 -xSSE2 -no-prec-div

Benchmarks using both Fortran and C:

-O3 -xSSE2 -no-prec-div

## Base Other Flags

C benchmarks:

-lmpi

C++ benchmarks:

126.lammps: -lmpi

Fortran benchmarks:

-lmpi

Benchmarks using both Fortran and C:

-lmpi

The flags file that was used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/SGI\\_x86\\_64\\_Intel12\\_flags.html](http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel12_flags.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/mpi2007/flags/SGI\\_x86\\_64\\_Intel12\\_flags.xml](http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel12_flags.xml)

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v2.0.  
Report generated on Tue Jul 22 13:43:46 2014 by SPEC MPI2007 PS/PDF formatter v1463.  
Originally published on 14 July 2011.