



# SPEC® MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Intel Corporation

Endeavor (Intel Xeon E7-8890 v3, 2.50 GHz, DDR4-2133 MHz, SMT on, Turbo on)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 5.92

MPI2007 license: 13


Test sponsor: Intel Corporation

Tested by: Pavel Shelepugin

Test date: May-2015

Hardware Availability: May-2015

Software Availability: Apr-2015

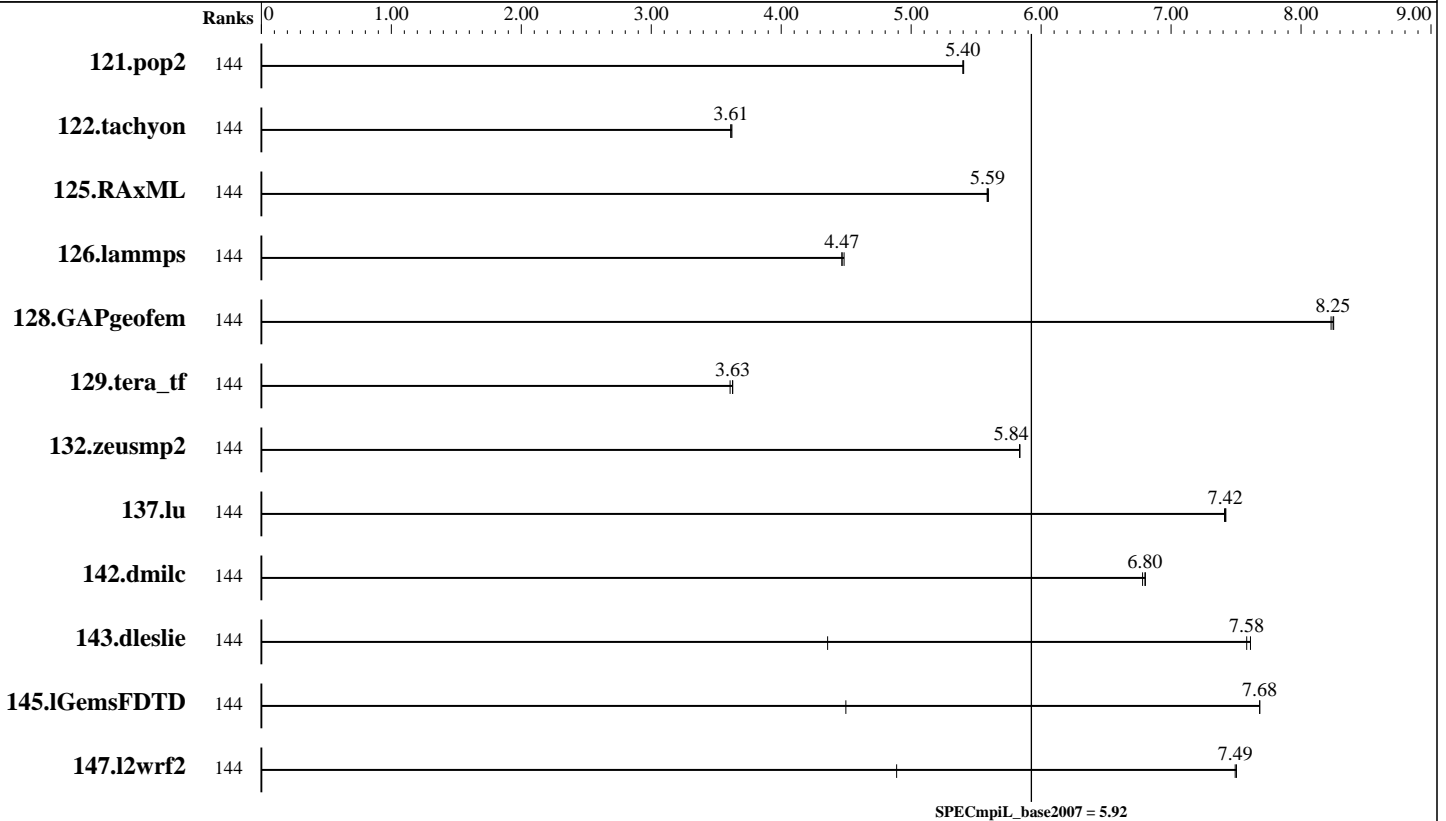

## Results Table

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
121.pop2	144	<u>721</u>	<u>5.40</u>	720	5.40	721	5.40							
122.tachyon	144	538	3.61	537	3.62	<u>538</u>	<u>3.61</u>							
125.RAxML	144	522	5.59	<u>522</u>	<u>5.59</u>	523	5.58							
126.lammps	144	<u>550</u>	<u>4.47</u>	548	4.48	550	4.47							
128.GAPgeofem	144	<u>720</u>	<u>8.25</u>	719	8.25	721	8.23							
129.tera_tf	144	305	3.61	<u>303</u>	<u>3.63</u>	303	3.63							
132.zeusmp2	144	<u>363</u>	<u>5.84</u>	363	5.83	363	5.84							
137.lu	144	566	7.42	<u>566</u>	<u>7.42</u>	567	7.41							
142.dmilc	144	542	6.80	<u>542</u>	<u>6.80</u>	543	6.78							
143.dleslie	144	407	7.61	<u>409</u>	<u>7.58</u>	711	4.36							
145.lGemsFDTD	144	574	7.68	<u>574</u>	<u>7.68</u>	981	4.50							
147.l2wrf2	144	1093	7.50	<u>1095</u>	<u>7.49</u>	1678	4.89							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Intel Corporation

Endeavor (Intel Xeon E7-8890 v3, 2.50 GHz, DDR4-2133 MHz, SMT on, Turbo on)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 5.92

MPI2007 license: 13

Test sponsor: Intel Corporation

Tested by: Pavel Shelepugin

Test date: May-2015

Hardware Availability: May-2015

Software Availability: Apr-2015

### Hardware Summary

Type of System: Homogeneous  
 Compute Node: Endeavor Node  
 Interconnects: IB Switch  
 Gigabit Ethernet  
 File Server Node: NFS  
 Total Compute Nodes: 2  
 Total Chips: 8  
 Total Cores: 144  
 Total Threads: 288  
 Total Memory: 1 TB  
 Base Ranks Run: 144  
 Minimum Peak Ranks: --  
 Maximum Peak Ranks: --

### Software Summary

C Compiler: Intel C++ Composer XE 2015 for Linux, Version 15.0.3.187 Build 20150407  
 C++ Compiler: Intel C++ Composer XE 2015 for Linux, Version 15.0.3.187 Build 20150407  
 Fortran Compiler: Intel Fortran Composer XE 2015 for Linux, Version 15.0.3.187 Build 20150407  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 MPI Library: Intel MPI Library 5.0.3.048 for Linux  
 Other MPI Info: None  
 Pre-processors: No  
 Other Software: None

## Node Description: Endeavor Node

### Hardware

Number of nodes: 2  
 Uses of the node: compute  
 Vendor: Intel  
 Model: S4TR2KU1Q  
 CPU Name: Intel Xeon E7-8890 v3  
 CPU(s) orderable: 1-4 chips  
 Chips enabled: 4  
 Cores enabled: 72  
 Cores per chip: 18  
 Threads per core: 2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.3 GHz, 9.6 GT/s QPI, Hyper-Threading enabled  
 CPU MHz: 2500  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 45 MB I+D on chip per chip, 45 MB shared / 18 cores  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-17000R-15, ECC)  
 Disk Subsystem: ATA INTEL SSDSA2BZ20, SSDSC2BB80  
 Other Hardware: None  
 Adapter: Intel (ESB2) 82575EB Dual-Port Gigabit Ethernet Controller  
 Number of Adapters: 1  
 Slot Type: PCI-Express x8  
 Data Rate: 1Gbps Ethernet  
 Ports Used: 2  
 Interconnect Type: Ethernet  
 Adapter: Mellanox MCX353A-FCAT ConnectX-3  
 Number of Adapters: 1  
 Slot Type: PCIe x8 Gen3  
 Data Rate: InfiniBand 4x FDR  
 Ports Used: 1  
 Interconnect Type: InfiniBand

### Software

Adapter: Intel (ESB2) 82575EB Dual-Port Gigabit Ethernet Controller  
 Adapter Driver: e1000  
 Adapter Firmware: None  
 Adapter: Mellanox MCX353A-FCAT ConnectX-3  
 Adapter Driver: OFED 3.5-2-MIC-rc1  
 Adapter Firmware: 2.31.5050  
 Operating System: Red Hat EL 6.5, kernel 2.6.32-358  
 Local File System: Linux/xfs  
 Shared File System: NFS  
 System State: Multi-User  
 Other Software: IBM Platform LSF Standard 9.1.1.1



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Intel Corporation

Endeavor (Intel Xeon E7-8890 v3, 2.50 GHz, DDR4-2133 MHz, SMT on, Turbo on)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 5.92

**MPI2007 license:** 13

**Test sponsor:** Intel Corporation

**Tested by:** Pavel Shelepugin

**Test date:** May-2015

**Hardware Availability:** May-2015

**Software Availability:** Apr-2015

### Node Description: NFS

Hardware		Software	
Number of nodes:	1	Adapter:	Intel 82563GB Dual-Port Gigabit Ethernet Controller
Uses of the node:	fileserver	Adapter Driver:	e1000e
Vendor:	Intel	Adapter Firmware:	N/A
Model:	S7000FC4UR	Operating System:	RedHat EL 5 Update 4
CPU Name:	Intel Xeon CPU	Local File System:	None
CPU(s) orderable:	1-4 chips	Shared File System:	NFS
Chips enabled:	4	System State:	Multi-User
Cores enabled:	16	Other Software:	None
Cores per chip:	4		
Threads per core:	2		
CPU Characteristics:	--		
CPU MHz:	2926		
Primary Cache:	32 KB I + 32 KB D on chip per core		
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores		
L3 Cache:	None		
Other Cache:	None		
Memory:	64 GB		
Disk Subsystem:	8 disks, 500GB/disk, 2.7TB total		
Other Hardware:	None		
Adapter:	Intel 82563GB Dual-Port Gigabit Ethernet Controller		
Number of Adapters:	1		
Slot Type:	PCI-Express x8		
Data Rate:	1Gbps Ethernet		
Ports Used:	1		
Interconnect Type:	Ethernet		

### Interconnect Description: IB Switch

Hardware		Software	
Vendor:	Mellanox		
Model:	Mellanox MSX6025F-1BFR		
Switch Model:	Mellanox MSX6025F-1BFR		
Number of Switches:	46		
Number of Ports:	36		
Data Rate:	InfiniBand 4x FDR		
Firmware:	9.2.8000		
Topology:	Fat tree		
Primary Use:	MPI traffic		



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Intel Corporation

Endeavor (Intel Xeon E7-8890 v3, 2.50 GHz, DDR4-2133 MHz, SMT on, Turbo on)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 5.92

MPI2007 license: 13

Test sponsor: Intel Corporation

Tested by: Pavel Shelepugin

Test date: May-2015

Hardware Availability: May-2015

Software Availability: Apr-2015

## Interconnect Description: Gigabit Ethernet

### Hardware

### Software

Vendor: Force10 Networks, Cisco Systems  
 Model: Force10 S50N, Force10 C300, Cisco WS-C4948E-F  
 Switch Model: Force10 S50N, Force10 C300, Cisco WS-C4948E-F  
 Number of Switches: 13  
 Number of Ports: 48  
 Data Rate: 1Gbps Ethernet, 10Gbps Ethernet  
 Firmware: 8.3.2.0, 12.2(54)WO  
 Topology: Star  
 Primary Use: Cluster File System

## Submit Notes

The config file option 'submit' was used.

## General Notes

MPI startup command:

mpiexec.hydra command was used to start MPI jobs.

BIOS settings:

Intel Hyper-Threading Technology (SMT): Enabled (default is Enabled)

Intel Turbo Boost Technology (Turbo) : Enabled (default is Enabled)

RAM configuration:

Compute nodes have 4x16-GB RDIMM on each memory channel.

Network:

Forty six 36-port switches: 18 core switches and 28 leaf switches.  
Each leaf has one link to each core. Remaining 18 ports on 25 of 28 leafs are used for compute nodes. On the remaining 3 leafs the ports are used for FS nodes and other peripherals.

Job placement:

Each MPI job was assigned to a topologically compact set of nodes, i.e. the minimal needed number of leaf switches was used for each job: 1 switch for 144/288/576 ranks.

IBM Platform LSF was used for job submission. It has no impact on performance.

Information can be found at: <http://www.ibm.com>

## Base Compiler Invocation

C benchmarks:  
mpiicc

Continued on next page



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**Intel Corporation**

Endeavor (Intel Xeon E7-8890 v3, 2.50 GHz,  
DDR4-2133 MHz, SMT on, Turbo on)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 5.92

**MPI2007 license:** 13

**Test sponsor:** Intel Corporation

**Tested by:** Pavel Shelepugin

**Test date:** May-2015

**Hardware Availability:** May-2015

**Software Availability:** Apr-2015

## Base Compiler Invocation (Continued)

C++ benchmarks:

126.lammps: mpiicpc

Fortran benchmarks:

mpiifort

Benchmarks using both Fortran and C:

mpiicc mpiifort

## Base Portability Flags

121.pop2: -DSPEC\_MPI\_CASE\_FLAG  
126.lammps: -DMPICH\_IGNORE\_CXX\_SEEK

## Base Optimization Flags

C benchmarks:

-O3 -xCORE-AVX2 -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xCORE-AVX2 -no-prec-div

Fortran benchmarks:

-O3 -xCORE-AVX2 -no-prec-div

Benchmarks using both Fortran and C:

-O3 -xCORE-AVX2 -no-prec-div

The flags file that was used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel140\\_flags.20140908.html](http://www.spec.org/mpi2007/flags/EM64T_Intel140_flags.20140908.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel140\\_flags.20140908.xml](http://www.spec.org/mpi2007/flags/EM64T_Intel140_flags.20140908.xml)



# SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Intel Corporation

Endeavor (Intel Xeon E7-8890 v3, 2.50 GHz,  
DDR4-2133 MHz, SMT on, Turbo on)

SPECmpiL\_peak2007 = Not Run

SPECmpiL\_base2007 = 5.92

**MPI2007 license:** 13

**Test sponsor:** Intel Corporation

**Tested by:** Pavel Shelepugin

**Test date:** May-2015

**Hardware Availability:** May-2015

**Software Availability:** Apr-2015

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v2.0.1.  
Report generated on Wed Jun 10 11:40:17 2015 by SPEC MPI2007 PS/PDF formatter v1463.  
Originally published on 10 June 2015.