



# SPEC<sup>®</sup> MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI


SGI ICE XA  
(Intel Xeon E5-2690 v4, 2.6 GHz)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 122

MPI2007 license: 14  
Test sponsor: SGI  
Tested by: SGI

Test date: Jun-2016  
Hardware Availability: May-2016  
Software Availability: Jun-2016

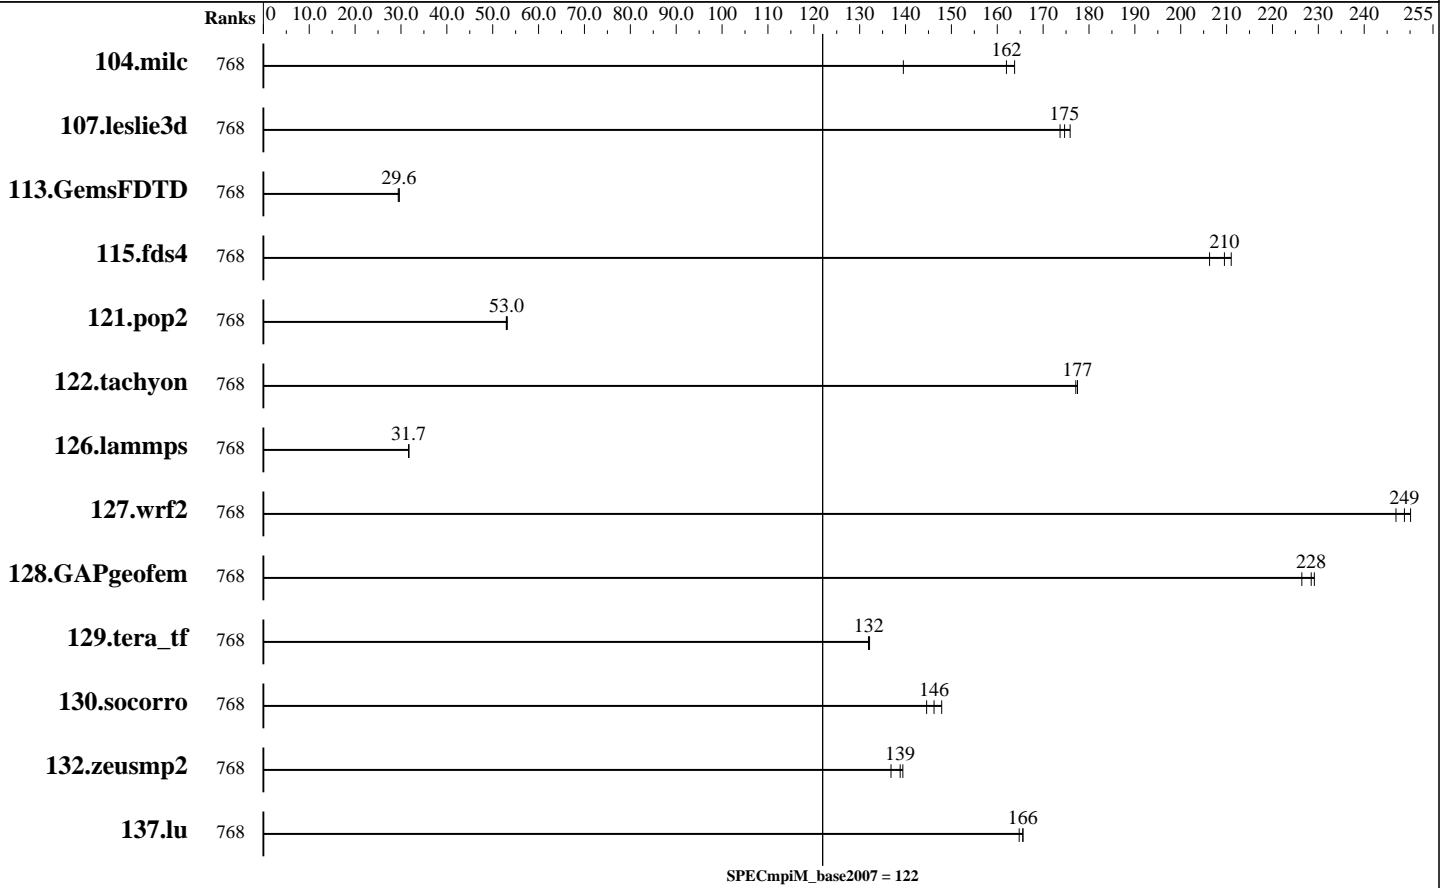

## Results Table

Benchmark	Base								Peak					
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
104.milc	768	11.2	140	<b><u>9.66</u></b>	<b><u>162</u></b>	9.56	164							
107.leslie3d	768	30.1	174	29.7	176	<b><u>29.9</u></b>	<b><u>175</u></b>							
113.GemsFDTD	768	<b><u>213</u></b>	<b><u>29.6</u></b>	213	29.6	214	29.4							
115.fds4	768	9.25	211	<b><u>9.31</u></b>	<b><u>210</u></b>	9.46	206							
121.pop2	768	77.9	53.0	<b><u>77.9</u></b>	<b><u>53.0</u></b>	77.6	53.2							
122.tachyon	768	<b><u>15.8</u></b>	<b><u>177</u></b>	15.8	177	15.8	177							
126.lammps	768	92.1	31.7	91.9	31.7	<b><u>91.9</u></b>	<b><u>31.7</u></b>							
127.wrf2	768	31.2	250	<b><u>31.3</u></b>	<b><u>249</u></b>	31.6	247							
128.GAPgeofem	768	9.12	226	9.01	229	<b><u>9.04</u></b>	<b><u>228</u></b>							
129.tera_tf	768	<b><u>21.0</u></b>	<b><u>132</u></b>	20.9	132	21.0	132							

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI ICE XA  
(Intel Xeon E5-2690 v4, 2.6 GHz)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 122

MPI2007 license: 14  
Test sponsor: SGI  
Tested by: SGI

Test date: Jun-2016  
Hardware Availability: May-2016  
Software Availability: Jun-2016

### Results Table (Continued)

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	768	25.8	148	26.4	145	<b>26.1</b>	<b>146</b>							
132.zeusmp2	768	22.7	137	<b>22.3</b>	<b>139</b>	22.3	139							
137.lu	768	22.2	166	22.3	165	<b>22.2</b>	<b>166</b>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

#### Hardware Summary

Type of System: Homogeneous  
 Compute Node: SGI ICE XA IP-125 CS  
 Interconnect: InfiniBand (MPI and I/O)  
 File Server Node: SGI MIS Server  
 Total Compute Nodes: 32  
 Total Chips: 64  
 Total Cores: 896  
 Total Threads: 1792  
 Total Memory: 4 TB  
 Base Ranks Run: 768  
 Minimum Peak Ranks: --  
 Maximum Peak Ranks: --

#### Software Summary

C Compiler: Intel C++ Composer XE 2016 for Linux, Version 16.0.3.210 Build 20160415  
 C++ Compiler: Intel C++ Composer XE 2016 for Linux, Version 16.0.3.210 Build 20160405  
 Fortran Compiler: Intel Fortran Composer XE 2016 for Linux, Version 16.0.3.210 Build 20160405  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 MPI Library: SGI MPT 2.14 Patch 11328  
 Other MPI Info: OFED 3.2.2  
 Pre-processors: None  
 Other Software: None

### Node Description: SGI ICE XA IP-125 CS

#### Hardware

Number of nodes: 32  
 Uses of the node: compute  
 Vendor: SGI  
 Model: SGI ICE XA (Intel Xeon E5-2690 v4, 2.6 GHz)  
 CPU Name: Intel Xeon E5-2690 v4  
 CPU(s) orderable: 1-2 chips  
 Chips enabled: 2  
 Cores enabled: 28  
 Cores per chip: 14  
 Threads per core: 2  
 CPU Characteristics: 14 Core, 2.60 GHz, 9.6 GT/s QPI  
 Intel Turbo Boost Technology up to 3.50 GHz  
 Hyper-Threading Technology enabled  
 CPU MHz: 2600  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 35 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2400T-R)  
 Disk Subsystem: None  
 Other Hardware: None  
 Adapter: Mellanox MT27700 with ConnectX-4 ASIC (PCIe x16 Gen3 8 GT/s)  
 Number of Adapters: 2  
 Slot Type: PCIe x16 Gen3

#### Software

Adapter: Mellanox MT27700 with ConnectX-4 ASIC (PCIe x16 Gen3 8 GT/s)  
 Adapter Driver: OFED-3.2.1.5.3  
 Adapter Firmware: 12.14.0114  
 Operating System: SUSE Linux Enterprise Server 11 SP4 (x86\_64), Kernel 3.0.101-71.1.10690.1.PTF-default  
 Local File System: NFSv3  
 Shared File System: NFSv3 IPoIB  
 System State: Multi-user, run level 3  
 Other Software: SGI Tempo Compute Node 3.3.0, Build 714r18.sles11sp4-1604041900

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SPECmpiM\_peak2007 = Not Run

SGI ICE XA  
(Intel Xeon E5-2690 v4, 2.6 GHz)

SPECmpiM\_base2007 = 122

MPI2007 license: 14  
Test sponsor: SGI  
Tested by: SGI

Test date: Jun-2016  
Hardware Availability: May-2016  
Software Availability: Jun-2016

### Node Description: SGI ICE XA IP-125 CS

Data Rate: InfiniBand 4X EDR  
Ports Used: 1  
Interconnect Type: InfiniBand

### Node Description: SGI MIS Server

#### Hardware

Number of nodes: 1  
Uses of the node: fileserver  
Vendor: SGI  
Model: SGI MIS Server  
CPU Name: Intel Xeon E5-2670  
CPU(s) orderable: 1-2 chips  
Chips enabled: 2  
Cores enabled: 16  
Cores per chip: 8  
Threads per core: 1  
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
Hyper-Threading Technology disabled  
CPU MHz: 1200  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (12 \* 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 45 TB RAID 6  
8 x 6+2 900GB (WD, 10K RPM)  
Other Hardware: None  
Adapter: Mellanox MT27500 with ConnectX-3 ASIC  
Number of Adapters: 2  
Slot Type: PCIe x8 Gen3  
Data Rate: InfiniBand 4X FDR  
Ports Used: 2  
Interconnect Type: InfiniBand

#### Software

Adapter: Mellanox MT27500 with ConnectX-3 ASIC  
Adapter Driver: OFED-3.2.0.1.1  
Adapter Firmware: 2.36.5000  
Operating System: SUSE Linux Enterprise Server 11 (x86\_64),  
Kernel 3.0.101-0.46-default  
Local File System: xfs  
Shared File System: --  
System State: Multi-user, run level 3  
Other Software: SGI Foundation Software 2.9,  
Build 711r2.sles11sp3-1411192056

### Interconnect Description: InfiniBand (MPI and I/O)

#### Hardware

Vendor: Mellanox Technologies and SGI  
Model: None  
Switch Model: SGI P0002145  
Number of Switches: 8  
Number of Ports: 36  
Data Rate: InfiniBand 4x EDR  
Firmware: 11.0350.0394  
Topology: Enhanced Hypercube

#### Software

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI ICE XA  
(Intel Xeon E5-2690 v4, 2.6 GHz)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 122

MPI2007 license: 14

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2016

Hardware Availability: May-2016

Software Availability: Jun-2016

### Interconnect Description: InfiniBand (MPI and I/O)

Primary Use: MPI and I/O traffic

### Submit Notes

The config file option 'submit' was used.

### General Notes

Software environment:

```
export MPI_REQUEST_MAX=65536
export MPI_TYPE_MAX=32768
export MPI_IB_RAILS=2
export MPI_IB_UPGRADE_SENDS=50
export MPI_IB_IMM_UPGRADE=false
export MPI_IB_DCIS=2
export MPI_CONNECTIONS_THRESHOLD=0
export MPI_IB_MTU=4096
ulimit -s unlimited
```

BIOS settings:

```
AMI BIOS version HA012036
Hyper-Threading Technology enabled
Intel Turbo Boost Technology enabled (default)
Transparent Hugepages Enabled
```

Job Placement:

Each MPI job was assigned to a topologically compact set of nodes using 12 ranks per socket.

Additional notes regarding interconnect:

The Infiniband network consists of two independent planes, with half the switches in the system allocated to each plane. I/O traffic is restricted to one plane, while MPI traffic can use both planes.

### Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

126.lammps: icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI ICE XA  
(Intel Xeon E5-2690 v4, 2.6 GHz)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 122

MPI2007 license: 14

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2016

Hardware Availability: May-2016

Software Availability: Jun-2016

## Base Portability Flags

121.pop2: -DSPEC\_MPI\_CASE\_FLAG  
127.wrf2: -DSPEC\_MPI\_CASE\_FLAG -DSPEC\_MPI\_LINUX  
130.socorro: -assume nostd\_intent\_in

## Base Optimization Flags

C benchmarks:

-O3 -xCORE-AVX2 -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xCORE-AVX2 -no-prec-div -ansi-alias

Fortran benchmarks:

-O3 -xCORE-AVX2 -no-prec-div

Benchmarks using both Fortran and C:

-O3 -xCORE-AVX2 -no-prec-div

## Base Other Flags

C benchmarks:

-lmpi

C++ benchmarks:

126.lammps: -lmpi

Fortran benchmarks:

-lmpi

Benchmarks using both Fortran and C:

-lmpi

The flags file that was used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/SGI\\_x86\\_64\\_Intel14\\_flags.20140908.html](http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel14_flags.20140908.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/mpi2007/flags/SGI\\_x86\\_64\\_Intel14\\_flags.20140908.xml](http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel14_flags.20140908.xml)



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## SGI

SGI ICE XA  
(Intel Xeon E5-2690 v4, 2.6 GHz)

SPECmpiM\_peak2007 = Not Run

SPECmpiM\_base2007 = 122

**MPI2007 license:** 14

**Test sponsor:** SGI

**Tested by:** SGI

**Test date:** Jun-2016

**Hardware Availability:** May-2016

**Software Availability:** Jun-2016

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v2.0.1.  
Report generated on Fri Aug 19 11:45:44 2016 by SPEC MPI2007 PS/PDF formatter v1463.  
Originally published on 19 August 2016.