



SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Supermicro

SPECmpiM_peak2007 = 64.1

A+ Server 2125HS-TNR (AMD EPYC 9654)

SPECmpiM_base2007 = 64.1

MPI2007 license: 6569


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

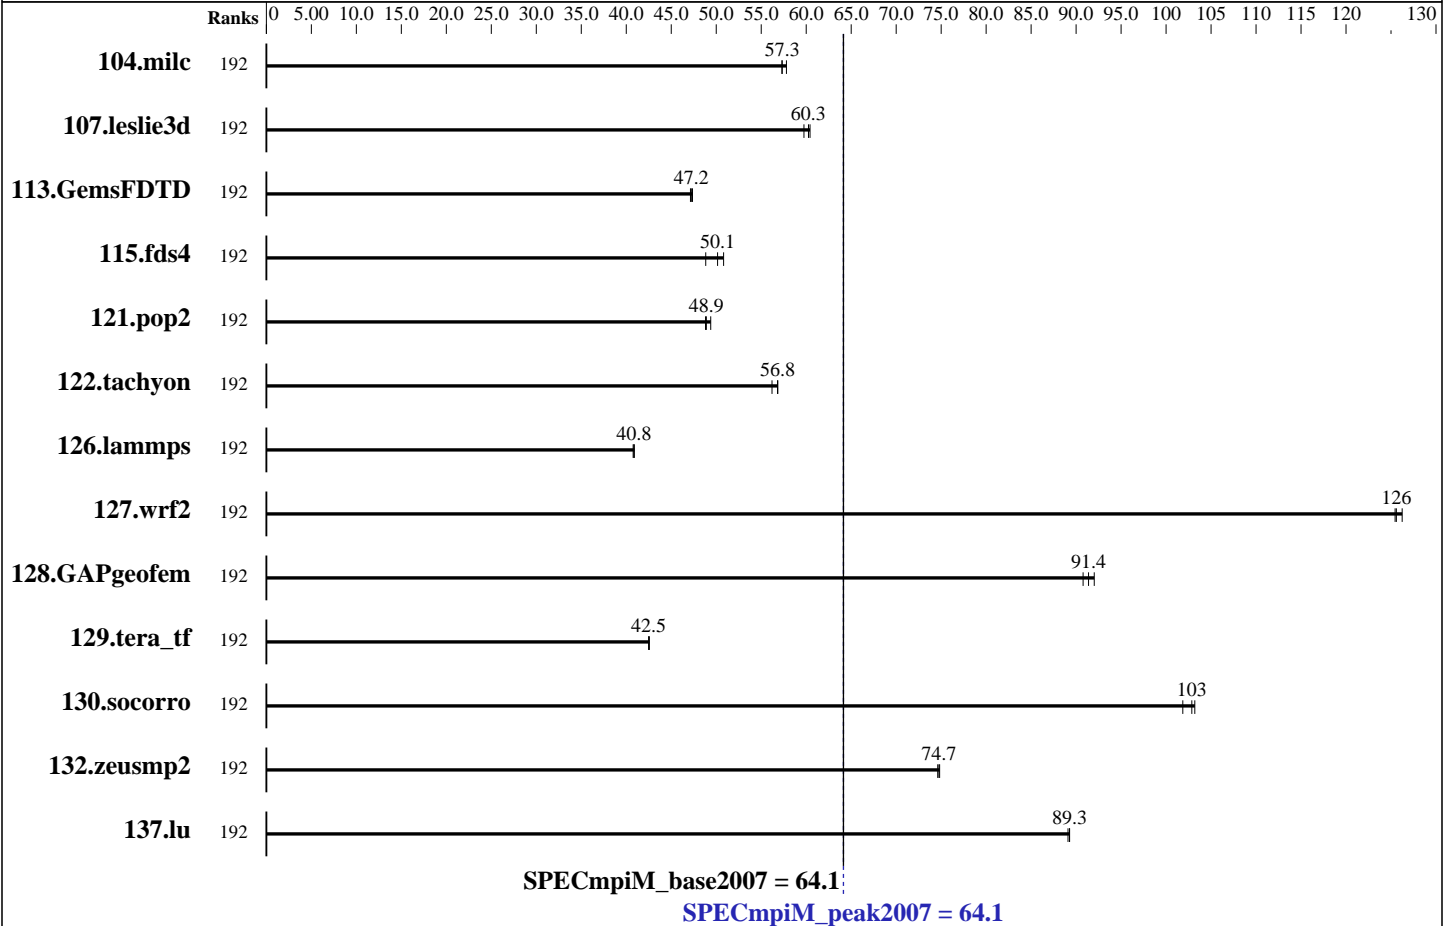

Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
104.milc	192	27.1	57.8	27.3	57.3	<u>27.3</u>	<u>57.3</u>	192	27.1	57.8	27.3	57.3	<u>27.3</u>	<u>57.3</u>		
107.leslie3d	192	87.4	59.8	86.6	60.3	86.4	60.4	192	87.4	59.8	86.6	60.3	86.4	60.4		
113.GemsFDTD	192	134	47.1	133	47.4	134	47.2	192	134	47.1	133	47.4	134	47.2		
115.fds4	192	38.9	50.1	40.0	48.8	38.4	50.8	192	38.9	50.1	40.0	48.8	38.4	50.8		
121.pop2	192	84.4	48.9	83.6	49.4	84.6	48.8	192	84.4	48.9	83.6	49.4	84.6	48.8		
122.tachyon	192	49.8	56.2	49.2	56.8	49.2	56.8	192	49.8	56.2	49.2	56.8	49.2	56.8		
126.lammps	192	71.4	40.8	71.5	40.8	71.3	40.9	192	71.4	40.8	71.5	40.8	71.3	40.9		
127.wrf2	192	61.8	126	62.1	125	62.1	126	192	61.8	126	62.1	125	62.1	126		
128.GAPgeofem	192	22.6	91.4	22.4	92.0	22.7	90.8	192	22.6	91.4	22.4	92.0	22.7	90.8		
129.tera_tf	192	65.0	42.6	65.1	42.5	65.1	42.5	192	65.0	42.6	65.1	42.5	65.1	42.5		

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Supermicro

SPECmpiM_peak2007 = 64.1

A+ Server 2125HS-TNR (AMD EPYC 9654)

SPECmpiM_base2007 = 64.1

MPI2007 license: 6569
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2022
Hardware Availability: Nov-2022
Software Availability: Nov-2022

Results Table (Continued)

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
130.socorro	192	37.0	103	37.5	102	<u>37.1</u>	<u>103</u>	192	37.0	103	37.5	102	<u>37.1</u>	<u>103</u>		
132.zeusmp2	192	41.6	74.6	41.5	74.8	<u>41.5</u>	<u>74.7</u>	192	41.6	74.6	41.5	74.8	<u>41.5</u>	<u>74.7</u>		
137.lu	192	41.3	89.1	41.2	89.3	<u>41.2</u>	<u>89.3</u>	192	41.3	89.1	41.2	89.3	<u>41.2</u>	<u>89.3</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Hardware Summary

Type of System: Homogeneous
Compute Node: A+ Server 2125HS-TNR
Total Compute Nodes: 1
Total Chips: 2
Total Cores: 192
Total Threads: 384
Total Memory: 1536 GB
Base Ranks Run: 192
Minimum Peak Ranks: 192
Maximum Peak Ranks: 192

Software Summary

C Compiler: AMD Optimizing C/C++ and Fortran Compilers (AOCC) Version 4.0.0 Build 389 for Linux
C++ Compiler: AMD Optimizing C/C++ and Fortran Compilers (AOCC) Version 4.0.0 Build 389 for Linux
Fortran Compiler: AMD Optimizing C/C++ and Fortran Compilers (AOCC) Version 4.0.0 Build 389 for Linux
Base Pointers: 64-bit
Peak Pointers: 64-bit
MPI Library: Open MPI Library for Linux Version 4.1.1
Other MPI Info: None
Pre-processors: No
Other Software: None

Node Description: A+ Server 2125HS-TNR

Hardware

Number of nodes: 1
Uses of the node: compute
Vendor: Supermicro
Model: A+ Server 2125HS-TNR
CPU Name: AMD EPYC 9654
CPU(s) orderable: 1-2 chips
Chips enabled: 2
Cores enabled: 192
Cores per chip: 96
Threads per core: 2
CPU Characteristics: Max. Boost Clock upto 3.7GHz
CPU MHz: 2400
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core
L3 Cache: 384 MB I+D on chip per chip
32 MB shared / 8 cores
Other Cache: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Disk Subsystem: 1 x 960 GB NVMe PCIe Gen4.0
Other Hardware: None
Adapter: None
Number of Adapters: 1
Slot Type: None
Data Rate: None

Software

Adapter: None
Adapter Driver: None
Adapter Firmware: None
Adapter: --
Adapter Driver: --
Adapter Firmware: --
Operating System: Ubuntu 22.04
Kernel 5.15.0-50-generic
Local File System: ext4
Shared File System: None
System State: Multi-user, run level 3
Other Software: None

Continued on next page



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Supermicro

SPECmpiM_peak2007 = 64.1

A+ Server 2125HS-TNR (AMD EPYC 9654)

SPECmpiM_base2007 = 64.1

MPI2007 license: 6569

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

Node Description: A+ Server 2125HS-TNR

Ports Used:	0
Interconnect Type:	None
Adapter:	--
Number of Adapters:	--
Slot Type:	--
Data Rate:	--
Ports Used:	--
Interconnect Type:	--

Submit Notes

The config file option 'submit' was used.

General Notes

Environment variables set by runspec before the start of the run:

```
GOMP_CPU_AFFINITY = "0-128"
KMP_BLOCKTIME = "200"
KMP_LIBRARY = "turnaround"
OMP_DYNAMIC = "false"
OMP_NESTED = "FALSE"
OMP_PLACES = "threads"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "128"
```

MPI startup command:

mpiexec command was used to start MPI jobs.

RAM configuration:

Compute nodes have 1 x 64 GB RDIMM on each memory channel.

BIOS settings:

```
NUMA nodes per socket = NPS4
L3 Cache as NUMA Domain = Enabled
Determinism Control = Manual
Determinism Slider = Power
xGMI Link Configuration = 4 xGMI Links
4 Link xGMI max speed = 32Gbps
TDP Control = Manual
TDP = 400
PPT Control = Manual
PPT = 400
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Supermicro

SPECmpiM_peak2007 = 64.1

A+ Server 2125HS-TNR (AMD EPYC 9654)

SPECmpiM_base2007 = 64.1

MPI2007 license: 6569
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2022
Hardware Availability: Nov-2022
Software Availability: Nov-2022

Base Compiler Invocation

C benchmarks:
mpicc

C++ benchmarks:
126.lammps: mpic++

Fortran benchmarks:
mpif90

Benchmarks using both Fortran and C:
mpicc mpif90

Base Portability Flags

104.milc: -DSPEC_MPI_LP64
115.fds4: -DSPEC_MPI_LP64
121.pop2: -DSPEC_MPI_CASE_FLAG -DSPEC_MPI_LP64
122.tachyon: -DSPEC_MPI_LP64
127.wrf2: -DSPEC_MPI_CASE_FLAG -DSPEC_MPI_LINUX -DSPEC_MPI_LP64
128.GAPgeofem: -DSPEC_MPI_LP64
130.socorro: -DSPEC_MPI_LP64
132.zeusmp2: -DSPEC_MPI_LP64

Base Optimization Flags

C benchmarks:
-Ofast -flto -ffast-math -march=znver4 -lamdlibm -ljemalloc -lflang

C++ benchmarks:
126.lammps: -Ofast -flto -ffast-math -march=znver4
-DMPICH_IGNORE_CXX_SEEK(*) -lamdlibm -ljemalloc -lflang

Fortran benchmarks:
-Ofast -flto -ffast-math -march=znver4 -funroll-loops -lamdlibm
-ljemalloc -lflang

Benchmarks using both Fortran and C:
-Ofast -flto -ffast-math -march=znver4 -funroll-loops -lamdlibm
-ljemalloc -lflang

(*) Indicates an optimization flag that was found in a portability variable.



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Supermicro

SPECmpiM_peak2007 = 64.1

A+ Server 2125HS-TNR (AMD EPYC 9654)

SPECmpiM_base2007 = 64.1

MPI2007 license: 6569

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

Base Other Flags

Benchmarks using both Fortran and C:

127.wrf2: -Wno-return-type

Peak Optimization Flags

C benchmarks:

104.milc: basepeak = yes

122.tachyon: basepeak = yes

C++ benchmarks:

126.lammps: basepeak = yes

Fortran benchmarks:

107.leslie3d: basepeak = yes

113.GemsFDTD: basepeak = yes

129.tera_tf: basepeak = yes

137.lu: basepeak = yes

Benchmarks using both Fortran and C:

115.fds4: basepeak = yes

121.pop2: basepeak = yes

127.wrf2: basepeak = yes

128.GAPgeofem: basepeak = yes

130.socorro: basepeak = yes

132.zeusmp2: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/mpi2007/flags/amd2021_flags.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/mpi2007/flags/amd2021_flags.xml



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Supermicro

SPECmpiM_peak2007 = 64.1

A+ Server 2125HS-TNR (AMD EPYC 9654)

SPECmpiM_base2007 = 64.1

MPI2007 license: 6569

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2022

Hardware Availability: Nov-2022

Software Availability: Nov-2022

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.1.
Report generated on Thu Nov 10 15:10:07 2022 by SPEC MPI2007 PS/PDF formatter v1463.
Originally published on 10 November 2022.