

# Wavelet-Harmonic Integration Methods

**Benjamin Lillard**

[blillard@uoregon.edu](mailto:blillard@uoregon.edu)

*Department of Physics, University of Oregon, Eugene, OR 97405.*

## Abstract

A new integration method drastically improves the efficiency of the dark matter direct detection calculation. In this work I introduce a complete, orthogonal basis of spherical wavelet-harmonic functions, designed for the new vector space integration method. This factorizes the numeric calculation into a part that depends only on the astrophysical velocity distribution; a second part, depending only on the detector form factor; and a scattering matrix defined on the basis functions, which depends on the details of the dark matter (DM) particle model (e.g. its mass). For common spin-independent DM–Standard Model interactions, this scattering matrix can be evaluated analytically in the wavelet-harmonic basis. This factorization is particularly helpful for the more complicated analyses that have become necessary in recent years, especially those involving anisotropic detector materials or more realistic models of the local DM velocity distribution. With the new method, analyses studying large numbers of detector orientations and DM particle models can be performed about 10 million times faster.

This paper derives several analytic results for the spherical wavelets, including an extrapolation in the space of wavelet coefficients, and a generalization of the vector space method to a much broader class of linear functional integrals. Both results are highly relevant outside the field of DM direct detection.

## Contents

<b>1</b>	<b>Introduction</b>	<b>2</b>
1.1	Scattering Rate . . . . .	4
1.2	Review of the Standard Approach . . . . .	6
1.3	A Need for Factorization . . . . .	7
<b>2</b>	<b>Orthogonal Basis Functions</b>	<b>8</b>
2.1	Kinematic Scattering Matrix . . . . .	10
2.2	Rotations and Partial Rate Matrix . . . . .	11
2.3	Summary . . . . .	12
<b>3</b>	<b>Spherical Haar Wavelets</b>	<b>13</b>
3.1	Definition . . . . .	13
3.2	Wavelet Extrapolation . . . . .	16
3.3	Convergence and Power . . . . .	19
3.4	Analytic Result for Kinematic Scattering Matrix . . . . .	21
3.5	Summary . . . . .	22
<b>4</b>	<b>Demonstrations for Direct Detection</b>	<b>23</b>
4.1	Angular Convergence . . . . .	25
4.2	Radial Convergence (Velocity Distribution) . . . . .	29

arXiv:2310.01483v1 [hep-ph] 2 Oct 2023

4.3	Local Accuracy (Momentum Form Factor)	30
4.4	Direct Detection Scattering Rate	34
4.5	Computation Time	36
<b>5</b>	<b>Discussion</b>	<b>38</b>
5.1	Generalization	38
5.2	Application to Momentum Form Factor	40
5.3	Basis Transformations	41
5.4	Squares, Roots, and Positivity	43
5.5	Polynomial Cap for the Wavelet Expansion	43
5.6	Library of Functions and Numeric Implementation	44
<b>6</b>	<b>Conclusion</b>	<b>45</b>
<b>A</b>	<b>Spherical Harmonics and Rotations</b>	<b>45</b>
<b>B</b>	<b>Analytic Expression for Scattering Matrix</b>	<b>48</b>
<b>C</b>	<b>Interpolation and Wavelet Extrapolation</b>	<b>52</b>
C.1	Haar wavelets	52
C.2	Spherical Wavelets	53
<b>D</b>	<b>Transformations From A Gaussian Basis</b>	<b>55</b>
<b>E</b>	<b>Timing Information</b>	<b>58</b>
E.1	Partial Scattering Rate Matrix	58
E.2	Rotations	60
E.3	Comparison: Direct Integration	61

# 1 Introduction

A direct detection scattering rate prediction requires input from three branches of physics; astrophysics, for the dark matter (DM) velocity distribution; a DM particle physics model, specifying the DM mass and the nature of its interactions with SM particles; and, from condensed matter or physical chemistry, a form factor encoding the SM physics of the detector response to a DM scattering event. Each of these items, especially the first two, is subject to uncertainty; propagating these uncertainties into the rate prediction for a given DM particle model may require scanning over ensembles of DM velocity distributions and SM detector response functions. At each point in the parameter space, the rate is given by an integral over the DM velocity  $\mathbf{v}$ , the momentum transfer  $\mathbf{q}$  to the SM target, and possibly the energy deposited,  $E$ , with an integrand that does not necessarily have a closed form analytic expression. The calculation must be repeated for every change to the input functions or parameters. For anisotropic detector materials the computational expense is particularly severe, because the DM scattering rate also depends on the orientation of the detector, necessitating scans over elements of  $SO(3)$  on top of everything else. A rigorous, detailed analysis can be prohibitively expensive.

To solve this problem, a companion paper [1] introduces a vector space integration method, where the DM velocity distribution and the detector response functions are approximated by sums

of carefully chosen velocity and momentum basis functions. With some foresight, the original multidimensional numeric integral that defines the DM–SM scattering rate can be integrated analytically for every pair of basis functions, generating a scattering matrix that connects the velocity and momentum vector spaces. There are two fundamental benefits to this approach. First, by design, the scattering matrix depends only on the DM model parameters (i.e. the DM particle mass(es) and the momentum dependence of its interactions with free SM particles), while the vectorized versions of the astrophysical and material form factors can be calculated independently. This factorization of the scattering rate greatly simplifies any analysis that includes large sets of velocity distributions, whether to account for the time-dependent variations caused by the Earth’s motion [2–7], or to address intrinsic asymmetries in the galactic frame velocity distribution [8–14].

Second, the choice to use spherical harmonics as part of the velocity and momentum basis functions makes rotations of the detector (or, equivalently, rotations of the DM sky) almost trivially easy to implement. Because spherical harmonics transform as representations of  $SO(3)$ , the action of a rotation on a function is given by matrix multiplication acting on its basis functions. Consequently, scans over large sets of rotations can be completed quickly, making it easy to optimize daily modulation analyses for anisotropic detectors [15–30]. While this benefit is irrelevant to isotropic detector targets [31–43], the factorization of the rate integral can simplify these simpler analyses by a substantial margin as well. The drastically streamlined calculation makes it possible to propagate the uncertainties from astrophysics [44–46] and the detector physics [47–49] into the rate prediction, or to perform halo-independent analyses of the DM particle model parameters [50–56]. A statistically significant signal of dark matter in multiple channels could even be used to measure components of the DM velocity distribution directly [57–59].

Spherical harmonics and other sets of orthogonal functions have been used to make many physical problems analytically tractable (e.g. [60]), even in the context of the DM velocity distribution [59]. What has so far gone unappreciated is the dramatic reduction in complexity that follows from the choice to represent the detector response function and the free DM–SM scattering operator in the same Hilbert spaces.

This paper investigates the choices that make the vector space method so efficient, with particular attention given to the radial basis functions. The accuracy and practicality of the vector space integration method is ultimately determined by how quickly the radial basis function expansions converge, and on whether certain intermediate integrals can be completed analytically. Even mundane decisions, such as which rest frame to use for the velocity distributions, offer unanticipated opportunities to reduce the computation time by additional orders of magnitude. Section 2 reviews the basic vector space integration method of Ref. [1], and derives the analytic simplifications that are independent of the form of the radial basis functions. In principle, the method could be used with any orthogonal basis of radial functions, but in practice, I find that familiar options such as Fourier or Bessel functions are suboptimal in a few respects.

A better choice is presented in Section 3: the spherical wavelets, which are designed for this application. The basis functions are piecewise constant, and almost maximally simple: this permits the analytic evaluation of the scattering matrix operator that appears in Section 2. Like the Haar wavelets [61] from which they are derived, each higher order spherical wavelet vanishes identically outside of a narrow region. In the large  $n$  limit, the width of the  $n$ th wavelet is proportional to  $1/n$ . So, the projection of a function onto the wavelet-harmonic basis actually becomes easier, rather than harder, at large  $n$ , whereas the integrands for the Fourier or Bessel expansions are increasingly oscillatory and numerically difficult. Section 3.3 introduces a test for global convergence of a basis function expansion, and finds that the spherical wavelets also converge substantially faster (as a

higher power of  $1/n$ ) than the alternatives.

Section 4 demonstrates the wavelet-harmonic integration method for a toy detector model (an idealized particle in a rectangular box) and a sample velocity distribution, comprised of a galactic DM halo and three large streams of differing widths. The demonstration culminates in a direct detection analysis combining the two models, concluding with a discussion of the computation time for each part of the calculation. Finally, the generalization of the wavelet-harmonic integration method is described in Section 5. Several other useful analytic results are provided in the appendices.

As a bonus, Section 3.2 derives an apparently novel extrapolation procedure for wavelet transformations, where an initial set of  $n \leq n_{\max}$  coefficients is used to predict the values of a much larger set of additional  $n > n_{\max}$  coefficients, using algebraic methods. This is a unique property of wavelet transformations, not shared by other orthogonal bases (e.g. Fourier, Legendre, Bessel, etc.). It relies only on the assumption that the original function is well approximated by its Taylor series within the (increasingly narrow) bases of support of the  $n$ th wavelets at  $n \sim n_{\max}$ . The wavelet extrapolation method can generate smooth interpolating functions and highly precise inverse wavelet transformations from a relatively small number of initial coefficients. Given the widespread use of wavelets in science and industry, it is surprising that this result does not seem to appear in the literature.

## 1.1 Scattering Rate

The DM–SM scattering rate  $R$  for continuum final states is given in the nonrelativistic limit by [62–65]:

$$R = N_T \frac{\rho_\chi}{m_\chi} \int dE d^3q d^3v g_\chi(\mathbf{v}) f_S^2(\mathbf{q}, E) \delta\left(E + \frac{q^2}{2m_\chi} - \mathbf{q} \cdot \mathbf{v}\right) \frac{\bar{\sigma}_0 F_{\text{DM}}^2(\mathbf{q})}{4\pi\mu_\chi^2}, \quad (1.1)$$

where  $N_T$  is the number of SM targets in the detector;  $\rho_\chi$  is the local DM mass density;  $m_\chi$  is the DM mass;  $\mu_\chi = m_\chi m_{\text{SM}} / (m_\chi + m_{\text{SM}})$  is the reduced mass of the DM–SM particle system, where  $m_{\text{SM}}$  is the mass of the Standard Model particle being scattered; and  $E$  and  $\mathbf{q}$  are the energy and momentum transferred from the DM to the SM target. The lab-frame DM velocity distribution  $g_\chi(\mathbf{v})$  is normalized as follows:

$$\int d^3v g_\chi(\mathbf{v}) \equiv 1; \quad (1.2)$$

and  $\bar{\sigma}_0 F_{\text{DM}}^2(\mathbf{q})$  is the free DM–SM particle scattering cross section, defined at some reference momentum transfer  $\mathbf{q}_r$ :

$$\bar{\sigma}_0 = \sigma(\mathbf{q} = \mathbf{q}_r), \quad F_{\text{DM}}(\mathbf{q}_r) \equiv 1. \quad (1.3)$$

In this paper I focus on spin-independent scattering, where  $F_{\text{DM}}(\mathbf{q}) = F_{\text{DM}}(q)$  is isotropic. The typical convention for DM–electron scattering is  $q_r = \alpha m_e$ , the inverse Bohr radius. For nuclear scattering a common choice is  $q_r = m_\chi v_r$ , for a  $v_r \approx 220$  km/s chosen to match the assumed virial velocity  $v_\sigma$  of the DM distribution.

If the DM–SM interaction is mediated by a light boson (with mass  $m_{\text{med}}$  that is much smaller than the typical momentum scale  $q_r$ ), then  $F_{\text{DM}}(q) = (q_r/q)^2$ . If instead the spin-independent DM–SM interaction occurs exclusively through short-range interactions, then  $F_{\text{DM}} = 1$ . This is

the  $m_{\text{med}} \gg q_r$  limit of the bosonic mediator theory, for example. This is referred to as a contact interaction; it corresponds to the  $\mathcal{O}_1$  Lagrangian of [15].

The momentum form factor  $f_s(\mathbf{q}, E)$  is related to the overlap between the initial and final state wavefunctions, given some transfer of momentum  $\mathbf{q}$ . In terms of the commonly used dynamic structure factor  $S(\mathbf{q}, \omega)$  [26, 65],

$$f_s^2(\mathbf{q}, \omega) \equiv V_{\text{cell}} S(\mathbf{q}, \omega) = V_{\text{cell}} \frac{2\pi}{V} \sum_f |\langle f | \mathcal{O}_{\mathbf{q}} | 0 \rangle|^2 \delta(\omega - \Delta E_f). \quad (1.4)$$

Here  $V$  is the detector volume, and  $V_{\text{cell}}$  is the volume of the crystal cell or single particle target, so that  $V/V_{\text{cell}} = N_T$  is the number of SM targets in the detector. The operator  $\mathcal{O}_{\mathbf{q}}$  corresponds to the momentum transfer, and  $\Delta E_f$  is the difference in energies between the  $|f\rangle$  and  $|0\rangle$  states. The original factor of  $1/V$  is related to the normalization of the continuum wavefunction  $|f\rangle$ .

Like this normalization of  $S(\mathbf{q}, \omega)$ ,  $f_s^2$  is an intensive quantity (i.e. its value is independent of the detector size). It represents a scattering probability within one unit cell of the target, e.g. the unit cell of a crystal lattice. For liquids and gases, the ‘‘unit cell’’ is usually a single particle, e.g. an atom or molecule.

So, while the normalization of  $f_s^2$  and  $S(\mathbf{q}, \omega)$  is dictated by the definition of the unit cell, the combination  $N_T f_s^2$  is independent of this choice. This  $f_s^2$  has units of inverse energy, so that  $dE f_s^2$  is dimensionless. It is introduced here to make it easier to write the scattering rates for discrete and continuous final state using the same expression. Note that this  $R$  is the scattering rate in units of  $\text{time}^{-1}$ , i.e. the number of events expected in the detector during some observation time  $T$  is  $(RT)$ . When appropriate, the rate per unit mass will be written explicitly as  $R/M_T$ , where  $M_T$  is the total mass of the detector target.

For discrete final state energies  $\Delta E_i$ , the rate for inducing a  $|0\rangle \rightarrow |s\rangle$  excitation in the material is given by:

$$R_s = N_T \frac{\rho_\chi}{m_\chi} \int d^3q d^3v g_\chi(\mathbf{v}) f_s^2(\mathbf{q}) \delta\left(\Delta E_s + \frac{q^2}{2m_\chi} - \mathbf{q} \cdot \mathbf{v}\right) \frac{\bar{\sigma}_0 F_{\text{DM}}^2(\mathbf{q})}{4\pi\mu_\chi^2}, \quad (1.5)$$

where  $\Delta E_s = E_s - E_0$  is the difference in energy between the initial and final SM states. For DM scattering off of single-particle SM states  $0 \rightarrow s$ , the momentum form factor is given simply in terms of the wavefunctions of the ground state  $|0\rangle$  and excited state  $|s\rangle$ :

$$f_s^2(\mathbf{q}) \equiv \left| \langle s | \hat{\mathcal{O}}_{\mathbf{q}} | 0 \rangle \right|^2 = \left| \int d^3r \psi_s^*(\mathbf{r}) e^{i\mathbf{q}\cdot\mathbf{r}} \psi_0(\mathbf{r}) \right|^2 = \left| \int d^3k \tilde{\psi}_s^*(\mathbf{k} + \mathbf{q}) \tilde{\psi}_0(\mathbf{k}) \right|^2, \quad (1.6)$$

for position-space or momentum-space wavefunctions  $\psi$  and  $\tilde{\psi}$ , with normalization  $\int d^3r \psi^* \psi = \int d^3q \tilde{\psi}^* \tilde{\psi} = 1$ .

It is convenient to define an  $f_s^2(\mathbf{q}, E)$  for the discrete final states:

$$\text{discrete: } f_s^2(\mathbf{q}, E) \longrightarrow f_s^2(\mathbf{q}) \delta(E - \Delta E_s), \quad (1.7)$$

so that the discrete version of the rate can be represented by the continuum expression, Eq. (1.1). This notation has two uses: it allows me to avoid referencing both  $f_s^2(\mathbf{q})$  and  $f_s^2(\mathbf{q}, E)$  every time they appear in this paper; and it will illustrate how some of the  $f_s^2(\mathbf{q})$ -specific methods

presented here can be applied to the continuum case. The total rate for one observable may include contributions from multiple final states, in which case:

$$R_{\text{tot}} = \sum_s R_s. \quad (1.8)$$

This is common in scintillators (a.k.a. fluorescent dyes) [24, 36].

Thanks to the  $\mathbf{q} \cdot \mathbf{v}$  term in the energy-conserving  $\delta$  function, both versions of the scattering rate depend on the orientation of the detector with respect to the DM velocity distribution. If the detector is rotated by some  $\mathcal{R} \in SO(3)$ , the new scattering rate can be calculated by applying the rotation operator to the momentum form factor,  $f_S^2(\mathbf{q}, E) \rightarrow \mathcal{R} \cdot f_S^2(\mathbf{q}, E) = f_S^2(\mathcal{R}\mathbf{q}, E)$ , or to the DM velocity distribution,  $g_\chi(\mathbf{v}) \rightarrow g_\chi(\mathcal{R}^{-1}\mathbf{v})$ . This can be represented compactly as

$$R(\mathcal{R}) = R(g_\chi f_S^2 \longrightarrow g_\chi \cdot \mathcal{R} \cdot f_S^2), \quad (1.9)$$

for  $g_\chi$  and  $f_S^2$  defined in some initial orientations, where the rotation operator acting to the left acts as the inverse,  $g_\chi \cdot \mathcal{R} = \mathcal{R}^{-1} \cdot g_\chi$ .

## 1.2 Review of the Standard Approach

Evaluating Eq. (1.1) or Eq. (1.5) requires a six- or seven-dimensional integral, which must be repeated for every dark matter mass  $m_\chi$  and form factor  $F_{\text{DM}}(q)$ , and for every orientation of the detector  $\mathcal{R}$ . If an analytic halo model for  $g_\chi$  is available, however, the integrand can be simplified, especially if the model for  $g_\chi$  is isotropic in the galactic rest frame. This approach is the current standard for direct detection. I review it here, mostly to contrast it with the vector space version of the calculation.

The expressions for the rate, Eq. (1.1) and Eq. (1.5), are often simplified by performing the integral over DM velocity. Shifting some factors of  $2\pi$  to match the notation of [65], the velocity integral can be expressed as  $g(\mathbf{q}, \omega)$ ,

$$g(\mathbf{q}, \omega) \equiv 2\pi \int d^3v g_\chi(\mathbf{v}) \delta\left(\omega + \frac{q^2}{2m_\chi} - \mathbf{q} \cdot \mathbf{v}\right), \quad (1.10)$$

so that the rate is

$$R(\mathcal{R}) = \frac{N_T \rho_\chi \bar{\sigma}_0}{8\pi^2 m_\chi \mu_\chi^2} \int dE d^3q F_{\text{DM}}^2(q) g(\mathbf{q}, E) \cdot \mathcal{R} \cdot f_S^2(\mathbf{q}, E), \quad (1.11)$$

where the rotation operator  $\mathcal{R}$  is applied to whichever of  $g$  and  $f_S^2$  is the simpler object. Recall that  $g_\chi$  has units of velocity<sup>-3</sup>, while this  $g$  has units of inverse energy.

This approach is particularly helpful if  $g_\chi$  is taken to be spherically symmetric in a galactic reference frame,

$$g_\chi^{\text{gal}}(v) = g_\chi^{\text{lab}}(\mathbf{v} - \mathbf{v}_E), \quad (1.12)$$

where  $\mathbf{v}_E$  is the lab velocity in the galactic rest frame. A typical simplified model of  $g_\chi$  is a Maxwell–Boltzmann distribution truncated sharply at the galactic escape velocity  $v_{\text{esc}}$ ,

$$g_\chi(\mathbf{v}) \approx \frac{1}{N_0} \exp\left(-\frac{|\mathbf{v} + \mathbf{v}_E|^2}{v_\sigma^2}\right) \Theta(v_{\text{esc}} - |\mathbf{v} + \mathbf{v}_E|), \quad (1.13)$$

where  $N_0$  enforces the normalization  $\int d^3v g_\chi \equiv 1$ , and with dispersion velocity  $v_\sigma \approx 220$  km/s and  $v_{\text{esc}} \approx 544\text{--}600$  km/s [62]. Changing the velocity coordinate to the galactic rest frame,  $\mathbf{v} \rightarrow \mathbf{v} - \mathbf{v}_E$ ,  $g_\chi$  becomes spherically symmetric,

$$g(\mathbf{q}, E) = \frac{2\pi}{q} \int \frac{d^3v}{v} g_\chi^{\text{gal}}(v) \delta\left(\frac{E}{qv} + \frac{q}{2m_\chi v} + \frac{\mathbf{q} \cdot \mathbf{v}_E}{qv} - \cos\theta_{qv}\right), \quad (1.14)$$

and the  $\delta(\dots - \cos\theta_{qv})$  function simplifies the angular integrals. Defining

$$v_-(\mathbf{q}, E) \equiv \frac{E}{q} + \frac{q}{2m_\chi} + \frac{\mathbf{q} \cdot \mathbf{v}_E}{q}, \quad (1.15)$$

and using the kinematic  $\delta$  function to evaluate the angular integrals,  $g(\mathbf{q}, E)$  simplifies to:

$$g(\mathbf{q}, E) = \frac{4\pi^2}{q} \int_0^\infty v dv g_\chi^{\text{gal}}(v) \Theta(-v \leq v_-(\mathbf{q}, E) \leq v). \quad (1.16)$$

For convenience, I use a boolean version of the Heaviside  $\Theta$  function, with  $\Theta \equiv 1$  if the inequality is satisfied, and  $\Theta = 0$  otherwise. The radial integral can be written more compactly as

$$g(\mathbf{q}, E) = \frac{2\pi^2}{q} \int_{v_-^2(\mathbf{q}, E)}^{v_{\text{max}}^2} dv^2 g_\chi^{\text{gal}}(v), \quad (1.17)$$

where in this last step I cut off the integral at some maximum speed, e.g. the galactic frame escape velocity  $v_{\text{max}} = v_{\text{esc}}$ . The nonrelativistic treatment assumes  $v_{\text{max}} \ll 1$ .

Any distribution  $g_\chi$  that is isotropic in the galactic frame can be simplified in this way, whether or not  $g_\chi^{\text{gal}}(v)$  is provided as an analytic function. For the truncated Maxwell–Boltzmann distribution of Eq. (1.13), the solution is:

$$g(\mathbf{q}, E) = \frac{2\pi^2 v_0^2}{q N_0} \left( e^{-v_-^2/v_\sigma^2} - e^{-v_{\text{esc}}^2/v_\sigma^2} \right) \Theta(v_{\text{esc}} - v_-), \quad (1.18)$$

for the  $v_-(\mathbf{q}, E, \mathbf{v}_E, m_\chi)$  of Eq. (1.15). Less idealized models of the velocity distribution may require the numeric evaluation of Eq. (1.17), e.g. for numerically derived but isotropic astrophysical models, or the fully 3d integral Eq. (1.14), for  $g_\chi(\mathbf{v})$  that include anisotropic DM populations.

### 1.3 A Need for Factorization

The integrated velocity distribution  $g(\mathbf{q}, E)$  depends on the DM mass  $m_\chi$  and the Earth velocity  $\mathbf{v}_E(t)$ , as well as the form of the galactic frame  $g_\chi$  distribution. For  $g_\chi$  models with no analytic description, evaluating the 3d integral in Eq. (1.14) for every combination of variables and parameters  $g(\mathbf{q}, E, m_\chi, \mathbf{v}_E)$  becomes very time-consuming, especially if the effects of annual modulation in  $\mathbf{v}_E(t)$  are included. After evaluating  $g(\mathbf{q}, E)$  on a suitably dense grid of points for each combination of  $m_\chi$  and  $\mathbf{v}_E$ , the scattering rate is determined by integrating the product of  $g(\mathbf{q}, E)$  and  $f_S^2(\mathbf{q}, E)$ . Unless the detector target is particularly simple (e.g. a noninteracting fluid of pointlike SM particles, or the toy model of Section 4), the form factors  $f_S^2(\mathbf{q}, E)$  are also usually derived numerically.

If  $g$  or  $f_S^2$  has no analytic solution, then the Eq. (1.11) integral requires interpolating that function from some grid of points in  $(\mathbf{q}, E)$ . Supposing that an accurate representation of  $f_S^2$  or

$g(\mathbf{q}, E)$  requires  $10^2$ – $10^3$  values along each axis, then each 3d or 4d grid would consist of  $10^6$ – $10^9$  or  $10^8$ – $10^{12}$  points, respectively. Integrating Eq. (1.11) once is numerically challenging; repeating the integral for every DM mass, every value of  $\mathbf{v}_E$  and every target orientation may be extremely expensive. Simultaneously testing multiple ensembles of  $g_\chi^{\text{gal}}$  or  $f_S^2$  distributions, e.g. to quantify the modeling uncertainties or to compare different physical cases, the integral Eq. (1.11) must be repeated

$$N_{\text{integrals}} = N_{\text{DM}} \times N_{\mathcal{R}} \times N_{g_\chi} \times N_{f_S} \quad (1.19)$$

many times. Here  $N_{\text{DM}}$  is the number of DM particle models, i.e. the number of  $m_\chi$  values times the number of  $F_{\text{DM}}$  form factors to test;  $N_{\mathcal{R}}$  is the number of detector orientations;  $N_{g_\chi}$  is the number of lab-frame DM velocity distributions  $g_\chi$ , i.e. the number of values of the Earth velocity  $\mathbf{v}_E(t)$  times the number of distinct galactic-frame DM distributions; and  $N_{f_S}$  is the number of detector form factors  $f_S^2$  to be tested.

Thankfully, with the method presented in Ref. [1], there is no need to integrate anything this many times. Rather than evaluating  $g(\mathbf{q}, E)$  and  $f_S^2(E, \mathbf{q})$  on a grid of points, the new method projects  $f_S^2(E, \mathbf{q})$  and the original velocity distribution  $g_\chi(\mathbf{v})$  onto bases of orthogonal functions. The  $dE d^3q d^3v$  integral of Eq. (1.1) is replaced by integrals over the basis functions, producing a matrix that connects the  $\mathbf{v}$  and  $(E, \mathbf{q})$  spaces. To evaluate the scattering rate, one simply multiplies this matrix by the vectorized versions of  $g_\chi$  and  $f_S^2$ , an action that must be repeated

$$N_{\text{matrix products}}^{(\text{new})} = N_{\text{integrals}}^{(\text{old})} \quad (1.20)$$

many times, following Eq. (1.19). Matrix multiplication is *extremely* fast compared to multidimensional numeric integration, especially if the matrices in question are not particularly large. The reduction in computation time can be correspondingly extreme.

Any set of basis functions would permit the factorization of the rate calculation into  $\{g_\chi\} + \{f_S^2\} + \{F_{\text{DM}}^2, m_\chi\}$ , but the choice to use spherical harmonics as part of the basis also simplifies the  $N_{\mathcal{R}}$  part of the Eq. (1.19) counting. Section 3 introduces a set of piecewise-constant orthogonal “spherical Haar wavelets” for the radial basis functions, which are simple enough that the rate integral can be completed analytically. At the end of the day, the only integrals that may need to be performed numerically are the projections of  $g_\chi$  and  $f_S^2$  onto the vector spaces spanned by the Section 3 basis functions. Supposing accurate reconstructions for  $g_\chi$  and  $f_S^2$  require  $N_v$  and  $N_q$  coefficients, respectively, the number of integrals to be completed is

$$N_{\text{integrals}}^{(\text{new})} = N_v \times N_{g_\chi} + N_q \times N_{f_S}. \quad (1.21)$$

In Section 4, I find that  $N_{v,q} \sim 10^3$  provides sufficiently good accuracy in some nontrivial examples. These integrals are over 3d or 4d volumes, rather than the 6d or 7d integrals of  $N_{\text{integrals}}^{(\text{old})}$ , so they are faster to evaluate. If  $g_\chi$  or  $f_S^2$  is described by analytic functions, some or all of the integrals may be completed analytically.

## 2 Orthogonal Basis Functions

The fundamental idea behind the vector space integration method is to represent  $g_\chi$  and  $f_S^2$  as sums of basis functions,

$$\phi_{n\ell m}(\mathbf{v}) \equiv r_n(v)Y_{\ell m}(\hat{v}), \quad \varphi_{jn\ell m}(E, \mathbf{q}) \equiv \tilde{r}_{jn}(E, q)Y_{\ell m}(\hat{q}), \quad (2.1)$$



where  $Y_{\ell m}$  are the real-valued spherical harmonics;  $r_n$  and  $\tilde{r}_{jn}$  are some sets of orthogonal “radial” functions, of one or two dimensions respectively; and  $v \equiv |\mathbf{v}|$ ,  $\hat{v} \equiv \mathbf{v}/v$ , and likewise for  $\mathbf{q} = q\hat{q}$ . In this language, transitions to discrete final states would be represented by 1d radial basis functions  $r_n(q)$ , i.e.  $R_{jn}(E, q) = r_n(q) \delta(E - \Delta E_j)$ . Real spherical harmonics are defined in terms of the complex  $Y_\ell^m$  as follows:

$$Y_{\ell m}(\Omega) \equiv \begin{cases} \sqrt{2} \operatorname{Im} Y_\ell^{|m|}(\Omega) & \text{for } m < 0, \\ Y_\ell^0(\Omega) & \text{for } m = 0, \\ \sqrt{2} \operatorname{Re} Y_\ell^m(\Omega) & \text{for } m > 0. \end{cases} \quad (2.2)$$

Spherical harmonics of fixed  $\ell$  (with  $-\ell \leq m \leq \ell$ ) transform as the  $(2\ell + 1)$  dimensional representations of  $SO(3)$ . So, for an  $f_S^2$  or  $g_\chi$  expanded in this basis, the rotation operator  $\mathcal{R}$  of Eq. (1.9) can be written as a matrix acting only on the  $m$  indices of  $\phi_{n\ell m}$  or  $\psi_{jn\ell m}$ .

For conciseness, I use a bra/ket notation to represent vectors and inner products on the vector spaces:

$$g_\chi(\mathbf{v}) \equiv |g_\chi\rangle = \sum_{n\ell m} \langle \phi_{n\ell m} | g_\chi \rangle | \phi_{n\ell m} \rangle, \quad (2.3)$$

$$f_S^2(\mathbf{q}, E) \equiv |f_S^2\rangle = \sum_{jn\ell m} \langle \varphi_{jn\ell m} | f_S^2 \rangle | \varphi_{jn\ell m} \rangle, \quad (2.4)$$

where  $|\phi\rangle$  and  $|\varphi\rangle$  are the basis functions defined in Eq. (2.1). When the context is clear, I may abbreviate either type of basis vector by its indices, i.e.  $|\phi_{n\ell m}\rangle \rightarrow |n\ell m\rangle$ ,  $|\varphi_{jn\ell m}\rangle \rightarrow |jn\ell m\rangle$ . In other contexts, especially when summing over complete sets of basis vectors, I suppress the  $(n\ell m)$  index in  $\phi$  or  $\varphi$  instead, e.g. by writing  $g_\chi = \sum_\phi \langle g_\chi | \phi \rangle \langle \phi |$ . For real-valued functions the inner products are symmetric,  $\langle f | g \rangle = \langle g | f \rangle$ , and I draw no distinction between “bra” and “ket” vectors.

The inner products in Eq. (2.4) and the normalizations of the basis functions are defined as

$$\langle g_\chi | \phi \rangle = \int \frac{d^3v}{v_0^3} \phi(\mathbf{v}) g_\chi(\mathbf{v}), \quad \langle \phi' | \phi \rangle \equiv \delta_{\phi', \phi}, \quad (2.5)$$

$$\langle \varphi | f_S^2 \rangle = \int \frac{dE}{E_0} \frac{d^3q}{q_0^3} \varphi(E, \mathbf{q}) f_S^2(E, \mathbf{q}), \quad \langle \varphi' | \varphi \rangle \equiv \delta_{\varphi', \varphi}. \quad (2.6)$$

Here,  $v_0$ ,  $q_0$ , and  $E_0$  are respectively an arbitrary reference velocity, momentum, and energy, introduced here to make  $\phi$  and  $\varphi$  dimensionless. With this convention, a function  $f$  and its vector representation  $|f\rangle$  have the same units; for  $g_\chi$  and  $f_S^2$  the units are  $(\text{velocity})^{-3}$  and  $(\text{energy})^{-1}$ , respectively. Combining Eq. (2.1) with Eq. (2.6), the normalizations of the radial functions  $r_n(v)$  and  $R_{jn}(E, q)$  should satisfy:

$$\int_0^\infty \frac{v^2 dv}{v_0^3} r_m(v) r_n(v) = \delta_{mn}, \quad \int_0^\infty \frac{dE}{E_0} \frac{q^2 dq}{q_0^3} \tilde{r}_{jn}(E, q) \tilde{r}_{j'n'}(E, q) = \delta_{j'j} \delta_{n'n}. \quad (2.7)$$

Lastly, the basis vectors  $\phi$  and  $\varphi$  have completeness relations:

$$v_0^3 \delta^{(3)}(\mathbf{v} - \mathbf{v}') = \sum_\phi |\phi\rangle \langle \phi| = \sum_{n=0}^\infty \sum_{\ell=0}^\infty \sum_{m=-\ell}^\ell \phi_{n\ell m}(\mathbf{v}) \phi_{n\ell m}(\mathbf{v}'), \quad (2.8)$$

$$E_0 q_0^3 \delta(E - E') \delta^{(3)}(\mathbf{q} - \mathbf{q}') = \sum_\varphi |\varphi\rangle \langle \varphi| = \sum_{j=0}^\infty \sum_{n=0}^\infty \sum_{\ell=0}^\infty \sum_{m=-\ell}^\ell \varphi_{jn\ell m}(E, \mathbf{q}) \varphi_{jn\ell m}(E', \mathbf{q}'). \quad (2.9)$$

## 2.1 Kinematic Scattering Matrix

Expanding  $g_\chi \rightarrow |g_\chi\rangle$  and  $f_S^2 \rightarrow |f_S^2\rangle$  in the relevant bases, the scattering rate can be written from Eq. (1.1) as

$$R = N_T \rho_\chi \bar{\sigma}_0 E_0 q_0^6 v_0^6 \sum_{\phi, \varphi} \langle g_\chi | \phi \rangle \left\langle \phi \left| \frac{F_{\text{DM}}^2(\mathbf{q})}{4\pi\mu_\chi^2 m_\chi} \delta\left(E + \frac{q^2}{2m_\chi} - \mathbf{q} \cdot (\mathbf{v} - \mathbf{v}_{\text{lab}})\right) \right| \varphi \right\rangle \langle \varphi | f_S^2 \rangle, \quad (2.10)$$

where we have inserted the completeness relations to factorize  $g_\chi$  and  $f_S^2$  from the kinematic  $\delta$  function, and where  $\mathbf{v}_{\text{lab}}$  is the velocity of the laboratory in whatever Galilean reference frame  $g_\chi(\mathbf{v})$  is defined in. The matrix element  $\langle \phi | \hat{\mathcal{O}} | \varphi \rangle$  is defined for an operator  $\hat{\mathcal{O}}$  by

$$\langle \phi | \hat{\mathcal{O}} | \varphi \rangle \equiv \int \frac{d^3v}{v_0^3} \frac{dE}{E_0} \frac{d^3q}{q_0^3} \phi(\mathbf{v}) \mathcal{O}(\mathbf{v}, \mathbf{q}, E) \varphi(\mathbf{q}, E). \quad (2.11)$$

This integral replaces Eq. (1.1). Because it involves the basis functions, rather than  $g_\chi$  and  $f_S^2$ , the integral may be completed analytically if  $\phi$  and  $\varphi$  are sufficiently simple. In the  $(\phi, \varphi)$  basis, the operator  $\hat{\mathcal{O}} = F_{\text{DM}}^2 \delta(\dots)$  is a scattering matrix that acts on the vectors  $\langle g_\chi |$  and  $|f_S^2\rangle$ .

For the specific case of nonrelativistic DM scattering, I collect all of the  $m_\chi$  dependent terms into the scattering matrix, along with enough factors of  $v_0$  and  $q_0$  to make the resulting  $\mathcal{M}$  dimensionless:

$$\mathcal{M}_\phi^\varphi \equiv \left\langle \phi \left| \frac{(q_0^4/v_0^2) F_{\text{DM}}^2(q)}{4\pi\mu_\chi^2 m_\chi} \delta\left(E + \frac{q^2}{2m_\chi} - \mathbf{q} \cdot \mathbf{v} + \mathbf{q} \cdot \mathbf{v}_{\text{lab}}\right) \right| \varphi \right\rangle, \quad (2.12)$$

expressing the scattering rate succinctly as a function of the detector orientation  $\mathcal{R} \in SO(3)$ :

$$R(\mathcal{R}) = \left( N_T \rho_\chi \sigma_0 \frac{v_0^2}{q_0} \right) \sum_{\phi, \varphi} \langle v_0^3 g_\chi | \phi \rangle \cdot \mathcal{M}_\phi^\varphi \cdot \mathcal{R} \cdot \langle \varphi | E_0 f_S^2 \rangle. \quad (2.13)$$

The prefactor in this expression has units of inverse time, while every object in the double sum is dimensionless. To convert this rate into an expected number of events, one simply multiplies  $R$  multiplied by the exposure time  $T_{\text{exp}}$ . From this I define a dimensionless exposure factor  $k_0$ ,

$$k_0 \equiv N_T T_{\text{exp}} \bar{\sigma}_0 \rho_\chi \frac{v_0^2}{q_0} = \frac{M_T}{m_{\text{cell}}^{(\text{mol})}} T_{\text{exp}} \mathcal{N}_A \bar{\sigma}_0 \rho_\chi \frac{v_0^2}{q_0}, \quad (2.14)$$

which is proportional to  $T_{\text{exp}}$ , and to the number of individual SM targets  $N_T$ , or equivalently the ratio of the total detector mass  $M_T$  to the molar mass of the unit cell,  $m_{\text{cell}}^{(\text{mol})}$ . For future reference, the numeric value of  $k_0$  is given by:

$$k_0 = 3288.95 \times \left( \frac{M_T T_{\text{exp}}}{1 \text{ kg}\cdot\text{yr}} \frac{1 \text{ g}}{m_{\text{cell}}^{(\text{mol})}} \frac{\bar{\sigma}_0}{10^{-40} \text{ cm}^2} \frac{\rho_\chi}{0.4 \text{ GeV}/\text{cm}^3} \right) \left( \frac{v_0}{220 \text{ km/s}} \right)^2 \left( \frac{\alpha m_e}{q_0} \right). \quad (2.15)$$

A subclass of operators  $\mathcal{O}(\mathbf{v}, \mathbf{q}, E)$  depend only on rotational invariants,  $q$ ,  $v$ ,  $E$ , and  $\mathbf{q} \cdot \mathbf{v}$ . These spherically symmetric operators take an especially simple form in vector spaces spanned by spherical harmonics. Specifically, the angular integrals of Eq. (2.11) can be completed using the

orthogonality of the spherical harmonics, with the result that the matrix  $\langle n\ell m | \mathcal{O} | jn'\ell'm' \rangle \propto \delta_\ell^{\ell'} \delta_m^{m'}$  is diagonal in the angular indices. In the case of Eq. (2.12) with  $\mathbf{v}_{\text{lab}} \equiv 0$  and isotropic  $F_{\text{DM}}^2(q)$ ,

$$\mathcal{M}_{n\ell m}^{jn'\ell'm'} = \delta_\ell^{\ell'} \delta_m^{m'} \mathcal{I}_{n,jn'}^{(\ell)}, \quad (2.16)$$

where  $\mathcal{I}^{(\ell)}$  is the *kinematic scattering matrix*,

$$\mathcal{I}_{n,jn'}^{(\ell)} \equiv \frac{q_0^3/v_0^3}{2m_\chi\mu_\chi^2} \int_0^\infty \frac{dE}{E_0} \frac{qdq}{q_0^2} \tilde{r}_{jn'}(E, q) F_{\text{DM}}^2(q) \int_{v_{\min}(q, E)}^\infty \frac{vdv}{v_0^2} P_\ell\left(\frac{v_{\min}(q)}{v}\right) r_n(v), \quad (2.17)$$

written here in the standard combination of  $E$ ,  $q$  and  $m_\chi$ ,  $v_{\min}(q)$ :

$$v_{\min}(E, q, m_\chi) \equiv \frac{E}{q} + \frac{q}{2m_\chi}. \quad (2.18)$$

The derivation of Eq. (2.17) uses completeness relations involving the Legendre polynomials ( $P_\ell$ ) and spherical harmonics to write the  $\delta$  function as an infinite sum:

$$\delta(a - \hat{q} \cdot \hat{v}) = 2\pi \sum_{\lambda=0}^\infty \sum_{\mu=-\lambda}^\lambda P_\lambda(a) Y_{\lambda\mu}(\hat{q}) Y_{\lambda\mu}(\hat{v}), \quad (2.19)$$

for  $-1 \leq a \leq 1$ , where in this case  $a \equiv v_{\min}/v$ . The  $\mathbf{q}$  and  $\mathbf{v}$  angular integrals are subsequently completed using the orthogonality of the spherical harmonics. Here the lower bound on the remaining  $dv$  integral comes from the condition  $|a| \leq 1$  in Eq. (2.19).

So, a large number of entries in the tensor  $\mathcal{M}_{n\ell m}^{jn'\ell'm'}$  are trivially zero, and those that remain are given by a 3d (rather than 7d) integral, which depends only on the DM model details,  $m_\chi$  and  $F_{\text{DM}}$ , and the choice of basis functions. This drastic reduction in complexity follows directly from the choice to express  $\phi(\mathbf{v})$  in the lab frame ( $v_{\text{lab}} \equiv 0$ ), which makes the operator  $\mathcal{O}$  spherically symmetric, rather than merely azimuthally symmetric (with respect to rotations about the  $\mathbf{v}_E$  axis). In retrospect, the  $\mathcal{M} \rightarrow \mathcal{I}$  simplification can be understood as an application of the Wigner–Eckhart theorem to the spherically symmetric scattering operator  $\mathcal{O}$ . Wigner–Eckhart provides a systematic way to simplify the scattering calculation for anisotropic  $F_{\text{DM}}(\mathbf{q})$ , e.g. for the spin-dependent operators of Ref. [15].

## 2.2 Rotations and Partial Rate Matrix

The complex spherical harmonics  $Y_\ell^m$  of fixed  $\ell$  transform as  $2\ell + 1$  dimensional representations of  $SO(3)$ , with the group action given by:

$$\mathcal{R} \cdot Y_\ell^m(\hat{u}) = Y_\ell^m(\mathcal{R} \cdot \hat{u}) = \sum_{m'=-\ell}^\ell D_{mm'}^{(\ell)} Y_\ell^{m'}(\hat{u}), \quad (2.20)$$

or  $|\mathcal{R} \cdot \phi\rangle = D^{(\ell)}(\mathcal{R}) \cdot |\phi\rangle$ , where  $D_{m'm}^{(\ell)} = \langle \ell m' | \mathcal{R} | \ell m \rangle$  is the Wigner  $D$  matrix. For the present analysis with real spherical harmonics  $|\ell m\rangle$ , I define an analogous Wigner  $G$  matrix:

$$G_{m'm}^{(\ell)} \equiv \langle \ell m' | \mathcal{R} | \ell m \rangle. \quad (2.21)$$

Although Eq. (2.21) represents the matrix coefficients as integrals over the angular coordinates, its solutions are known polynomials of trigonometric functions, so no integration is actually necessary. Explicit expressions for  $G^{(\ell)}$  in terms of the more familiar  $D^{(\ell)}$  are provided in Appendix A.

Both  $\mathcal{M}$  and  $G^{(\ell)}$  are diagonal in  $\ell$ , so the scattering rate can be written explicitly as

$$R(\mathcal{R}) = \frac{k_0}{T_{\text{exp}}} \sum_{\ell=0}^{\infty} \sum_{m,m'=-\ell}^{\ell} \sum_{n,j,n'=0}^{\infty} \langle v_0^3 g_{\chi} | n\ell m \rangle \cdot \mathcal{I}_{n,jn'}^{(\ell)} G_{mm'}^{(\ell)}(\mathcal{R}) \langle jn'\ell m' | E_0 f_S^2 \rangle. \quad (2.22)$$

Here we reference  $k_0$  of Eq. (2.14) for a compact representation of the numeric factors.

Each object  $\langle g_{\chi} | \varphi \rangle$ ,  $\mathcal{I}^{(\ell)}$ ,  $G^{(\ell)}$ , and  $\langle \varphi | f_S^2 \rangle$  is calculated independently, and the rate is given by the tensor product above. As an intermediate step, the sum over the radial modes can be completed for each  $(\ell, m, m')$ , to assemble the *partial rate matrices*,  $K^{(\ell)}$ :

$$K_{mm'}^{(\ell)}(g_{\chi}, f_S^2, m_{\chi}, F_{\text{DM}}) \equiv \sum_{n=0}^{\infty} \sum_{j,n'=0}^{\infty} \langle v_0^3 g_{\chi} | n\ell m \rangle \cdot \mathcal{I}_{n,jn'}^{(\ell)}(m_{\chi}, F_{\text{DM}}) \cdot \langle jn'\ell m' | E_0 f_S^2 \rangle, \quad (2.23)$$

$$R(g_{\chi}, f_S^2, m_{\chi}, F_{\text{DM}}, \mathcal{R}) = \frac{k_0}{T_{\text{exp}}} \sum_{\ell} \sum_{m,m'} K_{mm'}^{(\ell)} G_{mm'}^{(\ell)}(\mathcal{R}) = \frac{k_0}{T_{\text{exp}}} \sum_{\ell} \text{Tr}(G^{(\ell)} [K^{(\ell)}]^T). \quad (2.24)$$

The infinite sums over radial modes  $n$ ,  $j$  and  $n'$  are terminated at some  $n_{\text{max}}$ ,  $j_{\text{max}}$ , and  $n'_{\text{max}}$  once the value of  $K_{mm'}^{(\ell)}$  converges. The contribution to  $R$  from each  $\ell$  mode is given by the ‘‘partial rate’’  $\tilde{R}^{(\ell)}(\mathcal{R})$ ,

$$R(\mathcal{R}) = \frac{k_0}{T_{\text{exp}}} \sum_{\ell} \tilde{R}^{(\ell)}(\mathcal{R}), \quad \tilde{R}^{(\ell)}(\mathcal{R}) \equiv \sum_{\ell} \text{Tr}(G^{(\ell)}(\mathcal{R}) \cdot [K^{(\ell)}]^T). \quad (2.25)$$

The partial rate matrices  $K^{(\ell)}$  compress the information from  $g_{\chi}$ ,  $f_S^2$  and  $(m_{\chi}, F_{\text{DM}})$  into the experimentally-accessible observables  $R(\mathcal{R})$ , making them closely related to the Fisher information matrix [66]. Given measurements of  $R(\mathcal{R}_i)$  for multiple orientations  $\mathcal{R}_i$ , an experiment can constrain or measure the coefficients of  $K^{(\ell)}$ . By inverting Eq. (2.23) to isolate  $g_{\chi}$ , these measurements can be recast as a constraint or a detection of some components of  $|g_{\chi}\rangle$ .

## 2.3 Summary

Beyond the initial decision to vectorize the scattering rate with basis functions, I have made three important choices so far:

**Choice 1.** Use real spherical harmonics to describe the angular parts of the velocity and momentum basis functions, following Eqs. (2.1–2.7).

**Choice 2.** Express  $\langle g_{\chi} | \phi \rangle$  and  $\mathcal{M}_{\phi}^{\varphi}$  with lab frame ( $\mathbf{v}_{\text{lab}} \equiv 0$ ) basis vectors  $|\phi\rangle$ .

**Choice 3.** Collect all  $m_{\chi}$ -dependent terms inside the kinematic matrix  $\mathcal{M}$ , following Eq. (2.12).

The first two choices led to the block diagonalization of  $\mathcal{M} \rightarrow \mathcal{I}$  in the angular coordinates, while the third choice allows the complete factorization of the DM model parameters  $(m_{\chi}, F_{\text{DM}})$  from the astrophysics ( $|g_{\chi}\rangle$ ) and SM material properties ( $|f_S^2\rangle$ ).

The next choice to be made is as consequential: what should be used for the radial basis functions? Familiar examples include continuous orthogonal functions on  $0 \leq u < \infty$ , such as the

Laguerre or Hermite polynomials; or functions on finite intervals  $0 \leq u \leq u_{\max}$ , e.g. sinusoidal or Bessel functions. The radial functions could be localized at a series of points  $u_i$ , as in the Whittaker cardinal series of sinc functions, or even piecewise-defined within concentric spherical shells, e.g. to impose different asymptotic behaviors in the  $u \rightarrow 0$  and  $u \rightarrow \infty$  limits. A good basis should converge quickly enough that the infinite sums over  $j, n, \ell$  can be terminated at some finite  $j_{\max}$ ,  $n_{\max}$  and  $\ell_{\max}$  with an acceptable loss of precision. If the asymptotic behavior in some limit is known, we may impose that behavior on the basis functions; but, we should avoid tailoring the basis functions to any single specific  $g_\chi$  or  $f_S^2$  examples. Simplicity is the final criterion. For the best results, it should be possible to integrate Eq. (2.17) analytically.

With these criteria in mind, I construct the “spherical Haar wavelets” in Section 3. After developing some analytic properties of the spherical wavelets, it becomes clear that the spherical Haar wavelets are the obvious choice for this application.

### 3 Spherical Haar Wavelets

A generic wavelet transformation uses basis functions (wavelets) that are related to each other by translation and scaling operations. Haar wavelets [61] are a particularly simple example. For functions on the interval  $[0, 1]$ , all of the Haar wavelets are derived from two “scaling functions”  $H_{-1}$  and  $H_{0,0}$ :

$$H_{-1}(x) \equiv 1, \quad H_{0,0}(x) \equiv \begin{cases} +1 & 0 \leq x < 1/2 \\ -1 & 1/2 < x \leq 1. \end{cases} \quad (3.1)$$

with  $H_i(x) = 0$  for all  $x < 0$ ,  $x > 1$ . Every other wavelet can be expressed as a rescaling and translation of  $H_{0,0}(x)$ . Following [67], the higher-order wavelets  $H_{\lambda,\mu}$  are

$$H_{1,0}(x) = \sqrt{2} H_{0,0}(2x), \quad H_{2,0}(x) = 2 H_{0,0}(4x), \quad H_{2,2}(x) = 2 H_{0,0}(4x - 2), \quad (3.2)$$

$$H_{1,1}(x) = \sqrt{2} H_{0,0}(2x - 1), \quad H_{2,1}(x) = 2 H_{0,0}(4x - 1), \quad H_{2,3}(x) = 2 H_{0,0}(4x - 3), \quad (3.3)$$

etc. Each function  $H_{\lambda,\mu}$  has a base of support of length  $2^{-\lambda}$  on which  $h_{\lambda,\mu}(x) \neq 0$ . The index  $\mu$  indicates the position of the wavelet within the interval  $[0, 1]$ . while  $\lambda$  labels which generation the wavelet belongs to.

#### 3.1 Definition

To describe the 3d functions of velocity and momentum I define a set of “spherical Haar wavelets”  $h_{\lambda\mu}(u)$ ,

$$\int_0^1 u^2 du h_{\lambda\mu}(u) h_{\lambda'\mu'}(u) = \delta_{\lambda\lambda'} \delta_{\mu\mu'}, \quad (3.4)$$

with the explicit form for the  $\lambda = 0, 1, 2, \dots$  wavelets given by:

$$h_{\lambda\mu}(x) = \begin{cases} +A_{\lambda\mu} & 2^{-\lambda}\mu \leq x < 2^{-\lambda}(\mu + \frac{1}{2}), \\ -B_{\lambda\mu} & 2^{-\lambda}(\mu + \frac{1}{2}) < x \leq 2^{-\lambda}(\mu + 1), \\ 0 & \text{otherwise,} \end{cases} \quad (3.5)$$

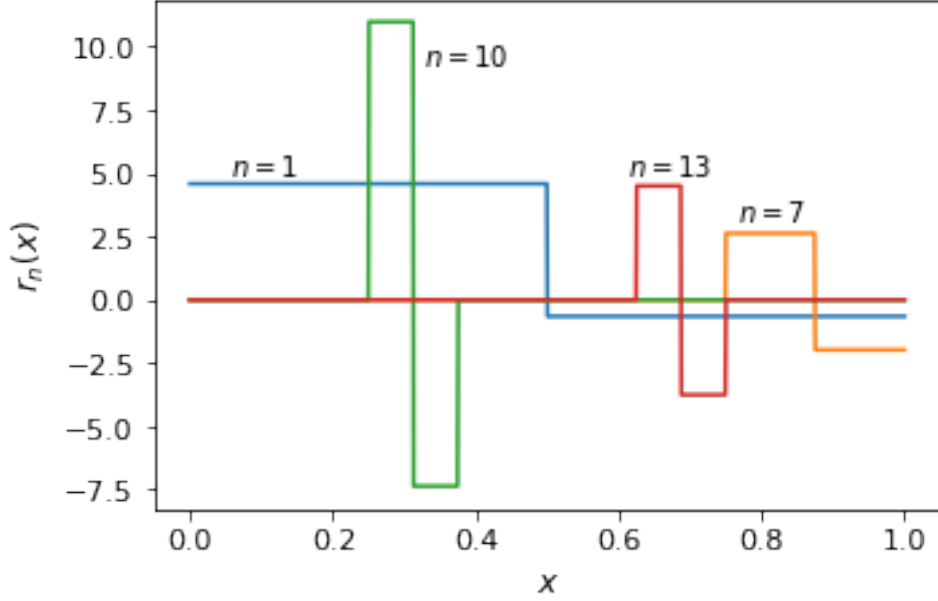


Figure 1: Spherical wavelets, for  $n = 1, 7, 10, 13$ . For example,  $n = 10$  and  $n = 13$  are of the same generation (equal  $\lambda$ , different  $\mu$ ); they have equal widths but different heights, so that spherical shells of  $|r_n(u)|^2$  occupy identical volumes.

where

$$x_1 = 2^{-\lambda}\mu, \quad x_2 = 2^{-\lambda}(\mu + \frac{1}{2}), \quad x_3 = 2^{-\lambda}(\mu + 1), \quad (3.6)$$

and

$$A_{\lambda\mu} = \sqrt{\frac{3}{x_3^3 - x_1^3} \frac{x_3^3 - x_2^3}{x_2^3 - x_1^3}} = \sqrt{\frac{3 \cdot 8^\lambda}{3\mu^2 + 3\mu + 1} \frac{12\mu^2 + 18\mu + 7}{12\mu^2 + 6\mu + 1}} \quad (3.7)$$

$$B_{\lambda\mu} = \sqrt{\frac{3}{x_3^3 - x_1^3} \frac{x_2^3 - x_1^3}{x_3^3 - x_2^3}} = \left( \frac{12\mu^2 + 6\mu + 1}{12\mu^2 + 18\mu + 7} \right) A_{\lambda\mu}. \quad (3.8)$$

To match the  $|\phi\rangle = r_n Y_{\ell m}$  notation, the  $(\lambda, \mu)$  indices are mapped onto a single integer  $n = 1, 2, 3, \dots$  via

$$n = 2^\lambda + \mu, \quad (3.9)$$

for  $\lambda = 0, 1, 2, \dots$  and  $0 \leq \mu \leq 2^\lambda - 1$ . Finally, to complete the basis, I must include a constant  $h_0(x)$  function analogous to  $H_{-1}$ ,

$$h_{n=0}(0 \leq x \leq 1) = \sqrt{3}. \quad (3.10)$$

A few of these basis functions are shown in Figure 1. For small  $n$  (e.g.  $n = 1$ ) the magnitudes of  $A$  and  $B$  are quite different, but for  $n$  farther away from the origin (e.g.  $n = 7$  or  $n = 13$ ) the difference is less noticeable. Wavelets belonging to the same generation  $\lambda$  have identical widths, but different heights.

Continuing to enumerate the decisions about the basis functions:

**Choice 4.** Use spherical wavelets for the velocity and momentum basis functions, and regular Haar wavelets for functions of energy:

$$r_n(v) = h_n(v/v_{\max}), \quad (3.11)$$

$$\tilde{r}_{j,n}(E, q) = h_n(q/q_{\max}) \cdot H_j(E/E_{\max}). \quad (3.12)$$

For discrete final state energies,  $\tilde{r}_{j,n} = h_n(q/q_{\max}) \cdot \delta(E - \Delta E_j)$  instead.

For the energy-dependent Haar basis functions  $H_j(E)$ , I take  $j = 2^\lambda + \mu$  for  $\lambda = 0, 1, 2, \dots$ , and map  $j = 0$  to the constant  $H_{-1}$  basis function. Each basis functions vanishes if  $v > v_{\max}$ ,  $E > E_{\max}$ , or  $q > q_{\max}$ . Finite cutoffs for  $v$ ,  $q$  and  $E$  are entirely appropriate for nonrelativistic scattering, but this basis can in principle be supplemented by additional  $u > u_{\max}$  basis functions, even extending to  $u \rightarrow \infty$ . Any additional basis functions should vanish on  $0 \leq u \leq u_{\max}$ , to ensure their orthogonality with respect to the primary set of wavelet basis functions described here. Further discussion of this possibility is postponed to Section 5.5, as these hybrid  $[0, u_{\max}] + [u_{\max}, \infty)$  basis functions are not needed for nonrelativistic direct detection.

**Consequences of Locality:** Before moving on, I will highlight two unique numerical benefits for wavelet-type basis functions. First: at larger  $n$ , the integrals  $\langle \phi | f \rangle$  actually get easier to perform. Suppose a Monte-Carlo integration method (with some fixed precision goal) evaluates the  $\langle n | f \rangle$  integrands for  $n = 0$  and  $n = 1$  with  $N_{\text{evals}}$  many points. Higher generation wavelets occupy progressively smaller fractions of the total volume: so, to obtain  $\langle n | f \rangle$  at the same level of precision, the  $N_{\text{evals}}$  can be reduced by the same ratio. Within the  $\lambda$ th generation, none of the  $h_{\lambda\mu}$  basis functions overlap: so, each new generation of wavelet coefficients can be evaluated with a *total* of  $N_{\text{evals}}$  integrand evaluations. Each new generation doubles the number of coefficients in the expansion,  $n_{\text{coeffs}} = 2^\lambda$ ; so, the total amount of integration work scales logarithmically with  $n_{\text{coeffs}}$ ,

$$N_{\text{evals}}^{(\text{total})} \sim N_{\text{evals}}^{(\lambda=0)} \log_2 n_{\text{coeffs}}. \quad (3.13)$$

This compares extremely favorably to the *increasing* amount of effort needed to integrate large  $n$  coefficients in the Fourier or Bessel series. These  $\phi_n$  are highly oscillatory, with  $n$  nodes, while occupying the full integration volume, so it may require  $n \cdot N_{\text{evals}}^{(0)}$  integrand evaluations to accurately calculate a single  $\langle \sin(n\pi x) | f(x) \rangle$ . In this case, the total  $N_{\text{evals}}^{(\text{total})}$  scales quadratically, rather than logarithmically, with  $n_{\text{coeffs}}$ . (Using specialized methods for Fourier-type integrals, e.g. [68],  $N_{\text{evals}}^{(\text{total})}$  can be improved to scale approximately linearly with  $n_{\text{coeffs}}$ , though at the cost of some intermediate calculations.)

A second, highly beneficial aspect of wavelets is presented in Section 3.2. Under the assumption that a function  $f(x)$  is well described by its Taylor series in the neighborhood of  $x \pm \Delta x$  for sufficiently small  $\Delta x$ , an initial set of wavelets ( $n \leq n_0$ , for  $n_0 \sim 1/\Delta x$ ) can be used to predict the values of a much larger set of  $n \gg n_0$  coefficients  $\langle n | f \rangle$ . This is an extrapolation procedure in the space of wavelet coefficients. A related result (“wavelet interpolation”) makes it possible to extract derivatives  $f'$ ,  $f''$ ,  $f^{(3)}$ , etc. directly from the wavelet coefficients in the  $n \gtrsim 1/\Delta x$  limit, without having to perform the inverse wavelet transformation.

Both benefits follow from the local nature of large  $n$  wavelets. As the wavelet bases of support shrink with increasing  $\lambda$ , the values of  $\langle f | n \rangle$  depend only the local properties of the function  $f$ .

## 3.2 Wavelet Extrapolation

Haar wavelets have a special property in the large  $n$  limit. As a wavelet becomes arbitrarily narrow, it approaches the first derivative of the Dirac  $\delta$  function,  $H_{\lambda\mu}(x) \rightarrow 2^{-\lambda/2}\delta'(x-x_2)$ , where  $x_2 = 2^{-\lambda}(\mu + \frac{1}{2})$  marks the center of the wavelet's base of support. In this extreme limit, where the width of the wavelet  $\Delta x = 2^{-\lambda}$  vanishes,  $\langle H_{n \rightarrow \infty} | f \rangle$  is just proportional to  $-(\Delta x)f'(x_2)$ . If  $f$  jumps discontinuously by a finite amount  $\Delta f$  in the neighborhood of  $x_2$ , then  $\langle H_{n \rightarrow \infty} | f \rangle \propto -\Delta f$  for any wavelets that span the discontinuity. Functions with infinitely large discontinuities at isolated points require special treatment; of course, this was already true for the original Eq. (1.1).

For wavelets with narrow but finite width, the values of  $\langle H_{\lambda\mu} | f \rangle$  can be estimated directly from the derivatives of  $f$ . Consider a wavelet in the  $\lambda$ th generation, with width  $\Delta = 2^{-\lambda}$ , having a base of support  $[x_1, x_3]$  centered at a point  $x_2$ . Let  $x$  be normalized so that  $f(x)$  lies on the interval  $[0, 1]$ . Suppose that within the region  $[x_1, x_3]$ , a function  $f(x)$  is well approximated by its third-order Taylor series centered at  $x_2$ ,

$$f(x) \simeq f(x_2) + f'_0(x-x_2) + \frac{f''_0}{2}(x-x_2)^2 + \frac{f_0^{(3)}}{3!}(x-x_2)^3, \quad (3.14)$$

where  $f_0^{(k)} \equiv f^{(k)}(x_2)$ . The imprecision of this expression is expected to scale like  $(\Delta/2)^4 f^{(4)}$  at the edges of the interval.

For (non-spherical) Haar wavelets,  $|\lambda\mu\rangle$  is normalized so that it takes the values  $\pm 2^{\lambda/2}$  when it is nonzero. In terms of  $\Delta$ , the wavelet coefficient  $\langle f | \lambda\mu \rangle$  is:

$$\langle f | H_{\lambda\mu} \rangle \simeq -\frac{2^{-\lambda/2}}{4} \left( f'_0 \Delta + \frac{1}{48} f_0^{(3)} \Delta^3 \right). \quad (3.15)$$

The subsequent generation of wavelets, defined on the intervals  $[x_a, x_2]$  and  $[x_2, x_b]$ , are sensitive to the second derivative of  $f$ :

$$\langle f | H_{\lambda+1, 2\mu} \rangle \simeq -\frac{(\sqrt{2})^{-\lambda+1}}{16} \left[ \Delta f'_0 - \frac{1}{4} \Delta^2 f''_0 + \frac{7}{192} \Delta^3 f_0^{(3)} \right], \quad (3.16)$$

$$\langle f | H_{\lambda+1, 2\mu+1} \rangle \simeq -\frac{(\sqrt{2})^{-\lambda+1}}{16} \left[ \Delta f'_0 + \frac{1}{4} \Delta^2 f''_0 + \frac{7}{192} \Delta^3 f_0^{(3)} \right]. \quad (3.17)$$

So, given the values of the  $\lambda$  and  $\lambda + 1$  wavelet coefficients, it is possible to extract the values of  $f_0^{(p)}$  for  $p = 1, 2, 3$  by applying some simple linear algebra to Eqs. (3.15–3.17). Alternatively, if the derivatives of  $f$  are already known (e.g. if  $f(x)$  is given analytically) then the large  $\lambda \geq \lambda_*$  coefficients can be calculated directly from Eq. (3.15), for some  $\lambda_*$  large enough that the difference between  $\langle f | H_{\lambda\mu} \rangle$  and the cubic-order estimate is acceptably small. In this way, the values of three coefficients ( $\langle f | \lambda\mu \rangle$  and the two  $\lambda + 1$  wavelets that overlap with it) can be used to generate a much larger set of  $\lambda' \geq \lambda + 2$  coefficients, with a precision controlled by the size of the  $\Delta^4 f_0^{(4)}$  term that has been dropped from Eq. (3.14). I refer to this method as “wavelet extrapolation.” The extrapolation is in the space of coefficients,  $|n\rangle$ , not extrapolation in the domain of  $x$ . It can be used to refine the inverse wavelet transformation  $f(x) \simeq \sum_n \langle n | f \rangle |n\rangle$  or to construct interpolating functions for  $f(x)$  and its derivatives within the original range  $0 \leq x \leq 1$ .

To take a specific example, suppose that  $f(x)$  in the region of  $x_2$  is oscillatory, with some characteristic wavelength  $2\pi \delta x$ . This  $\delta x$  satisfies  $\delta x f' \sim (\delta x)^2 f'' \sim (\delta x)^p f^{(p)}$ , indicating that the



cubic Taylor series expansion begins to converge once  $\Delta < \delta x$ . Defining  $\lambda_\delta \equiv \log_2(1/\delta x)$ , the error of the cubic approximation for  $\langle f | \lambda \mu \rangle$  scales as

$$\frac{\langle f | H_{\lambda \mu} \rangle - \langle f | H_{\lambda \mu}^{\text{cubic}} \rangle}{\langle f | H_{\lambda \mu} \rangle} \propto \frac{\Delta^5 f_0^{(5)}}{\Delta f_0^{(1)}} \sim \left( \frac{\Delta}{\delta x} \right)^4 \sim 16^{\lambda_\delta - \lambda}, \quad (3.18)$$

while the error of Eqs. (3.16–3.17) scales as  $\Delta^3 f^{(4)}/f^{(1)} \sim (\Delta/\delta x)^3 \sim 8^{\lambda_\delta - \lambda}$ . So, if the derivatives  $f^{(p)}$  are known exactly, then the approximation Eq. (3.15) improves with a factor of 16 in accuracy with each subsequent generation  $\lambda \rightarrow \lambda + 1$ . Alternatively, if  $f^{(p)}$  are extracted via Eqs. (3.16–3.17) from an initial  $\lambda \leq \lambda_\star$  set of integrated wavelet coefficients, then the accuracy of the wavelet extrapolation procedure improves by a factor of 8 when  $\lambda_\star$  is incremented by one.

In a hypothetical application where the wavelet transformation and its inverse must be calculated to arbitrarily high precision, this wavelet extrapolation procedure is highly useful. For basis functions with no extrapolation method (e.g. Fourier or Bessel), one would otherwise calculate  $\langle f | n \rangle$  for all  $n$  such that  $\langle f | n \rangle \geq \epsilon$ , for some precision goal  $\epsilon$ . With the  $8^{\lambda_\star}$  scaling of the Eqs. (3.16–3.17) relative error, the cubic wavelet extrapolation method can accurately approximate all of these coefficients from a  $\lambda \leq \lambda_\star$  initial set, where

$$\lambda_\star \sim \lambda_\delta + \frac{1}{3} \log_2 \frac{1}{\epsilon}. \quad (3.19)$$

Only  $n_{\text{coeffs}} = 2^{\lambda_\star}$  of the coefficients need to be evaluated directly from the inner products  $\langle f | n \rangle$ , so the precision in  $\epsilon$  improves as  $\epsilon \propto 1/n_{\text{coeffs}}^3$ .

**General Method for Spherical Wavelets:** An analogous extrapolation method exists for the spherical wavelets, though the adaptation of Eq. (3.15) involves the  $\lambda \mu$  dependent factors  $A_{\lambda \mu}$  and  $B_{\lambda \mu}$ . For this reason alone it is convenient to define some intermediate expressions, so I may as well provide the general  $k$ th order version of the extrapolation. For a spherical wavelet  $|\lambda \mu \rangle$  centered at  $x = x_2$ , with base of support  $\Delta = x_3 - x_1 = 2^{-\lambda}$ , define:

$$F_p(\lambda, \mu) \equiv \frac{\Delta^p f_0^{(p)}}{2^p p!} = 2^{-p(\lambda+1)} \frac{f_0^{(p)}}{p!}, \quad (3.20)$$

$$D_p(\lambda, \mu) \equiv \frac{\Delta^3}{8} \left[ \frac{(-1)^p A_{\lambda \mu} - B_{\lambda \mu}}{p+3} - 4 \left( \mu + \frac{1}{2} \right) \frac{(-1)^p A_{\lambda \mu} + B_{\lambda \mu}}{p+2} + 4 \left( \mu + \frac{1}{2} \right)^2 \frac{(-1)^p A_{\lambda \mu} - B_{\lambda \mu}}{p+1} \right], \quad (3.21)$$

with  $A_{\lambda \mu}$  and  $B_{\lambda \mu}$  defined in Eq. (3.8). For a  $k$ th order Taylor series, the projection of  $f$  onto a  $\lambda \geq 1$  spherical wavelet is given by:

$$\langle f | h_{\lambda \mu} \rangle \simeq \sum_{p=1}^k F_p(\lambda, \mu) D_p(\lambda, \mu). \quad (3.22)$$

Note that the  $p = 0$  term vanishes for all  $\lambda \geq 0$ , due to the orthogonality of  $\langle n = 0 | \lambda \mu \rangle$ . Unlike the Haar wavelets, though, the even derivative terms  $f''$ ,  $f^{(4)}$  etc. do not vanish. From Eq. (3.20), the largest subleading term missing from the series is proportional to  $2^{-(k+1)(\lambda+1)}$ : so, as  $\lambda$  increases, the absolute accuracy of Eq. (3.22) improves as  $2^{(k+1)\lambda}$ .

For both spherical and regular Haar wavelets, the coefficients  $\langle f | n \rangle$  converge predictably once  $\Delta = 2^{-\lambda}$  is small enough that the function  $f$  is well described by its Taylor series within the base of

support of the  $n$ th wavelet. Given the values of some coefficients  $\langle f|n\rangle$ , the derivatives  $f^{(p)}$  can be found algebraically from Eq. (3.22). This can be used to define  $k$ th order interpolating functions for  $f(x)$ , for example if an analytic version of  $f(x)$  is not available. Appendix C provides explicit solutions for cubic interpolation. The relative precision  $\epsilon$  scales with the number of integrated coefficients  $n_{\text{coeffs}} = 2^{\lambda_*}$  as in Eq. (3.18) and Eq. (3.19): in the latter case, for the  $k$ th order extrapolation on spherical wavelets,

$$\epsilon \propto 1/n_{\text{coeffs}}^k. \quad (3.23)$$

If the derivatives  $f^{(p)}$  are known exactly, then the precision of Eq. (3.22) scales as  $\epsilon \propto 1/n_{\text{coeffs}}^{k+1}$ . The generic extrapolation procedure uses the values of the final  $j$  generations in the wavelet transformation,  $\lambda = \lambda_*, \lambda_* - 1, \dots, \lambda_* - j + 1$ , where  $k \leq 2^j - 1$  is the polynomial order of the wavelet extrapolation. For example, a set of three wavelet generations can support a seventh-order extrapolation procedure.

**Application to 3d functions:** The discussion so far involves a 1d function  $f(x)$ , expanded in Haar or spherical wavelets. In the context of  $g_\chi(\mathbf{v})$  or  $f_S^2(\mathbf{q})$ , the relevant  $f(x)$  is a radial function  $f_{\ell m}$  defined for every angular mode  $(\ell, m)$ :

$$f_{\ell m}(u) = \langle \ell m | f \rangle \equiv \int d\Omega Y_{\ell m}(\Omega) f(\mathbf{u}), \quad (3.24)$$

where to match the normalization of this section,  $x = u/u_{\text{max}}$  for some  $u_{\text{max}}$ . Reverting to the  $n = 2^\lambda + \mu$  indexing, the inverse wavelet transformation is given by:

$$f_{\ell m}(u) \simeq \sum_{n=0}^{n_{\text{max}}} \langle n \ell m | f \rangle |n\rangle. \quad (3.25)$$

Given the values of three coefficients,  $\langle n \ell m | f \rangle$  for  $n = n_*, 2n_*, 2n_* + 1$ , the coefficients for the subsequent generations of wavelets overlapping with  $|n\rangle$  can be estimated using the cubic wavelet extrapolation, Eq. (3.22).

**Concluding Comments:** To underscore the unique nature of the wavelet extrapolation, consider an analogy to Fourier or Bessel expansions. If something like the cubic extrapolation method were valid for more general basis functions, then under some generic assumption (e.g. that  $f$  varies slowly compared to, say, the 100th basis function), the first  $n < 100$  Fourier coefficients could in this example be used to precisely estimate the coefficients of all of the subsequent  $n \lesssim 10^6$  high frequency modes. Unfortunately, no such method exists: the information contained in the first few Fourier coefficients is insufficient for estimating the large- $n$  modes.

On the other hand, similar wavelet extrapolation methods should be available for any other basis functions that approach locality in the large  $n$  limit; that is, the compact base of support  $\Delta_n$  for the  $n$ th function vanishes in the limit

$$\lim_{n \rightarrow \infty} \Delta_n = 0. \quad (3.26)$$

Other families of wavelets with compact support, e.g. Daubechies [69], have this locality property. From the values of the  $p \leq k$  central moments  $\langle n | (x - x_2)^p \rangle$  in the limit  $\Delta_n \rightarrow 0$  (for  $|x - x_2| \leq \frac{1}{2}\Delta_n$ ,

the base of support of the  $n$ th basis function), one could derive an analogous  $k$ th order extrapolation method by generalizing Eq. (3.22).

So, the fast convergence demonstrated in the higher-order Daubechies wavelets can now be achieved with the easily integrated Haar wavelets, This simple result has wide-ranging consequences for any numerical methods that involve wavelets, especially in high precision calculations.

### 3.3 Convergence and Power

There are multiple measures of how quickly a series converges. The residual difference between a function  $f(\mathbf{u})$  and its basis expansion  $\sum_{\phi} \langle \phi | f \rangle |\phi\rangle$  provides a local measurement of the accuracy, for example. For a global measure of accuracy, the distributional “power” is particularly convenient.

A complete, orthogonal,  $L^2$  normalized basis preserves the norm-squared of a distribution, which is a functional defined for a real  $f(\mathbf{u})$  as

$$\mathcal{E}[f] \equiv \int d^3u [f(\mathbf{u})]^2. \quad (3.27)$$

Expanding  $f$  in the basis spanned by  $|\phi\rangle$ ,

$$\mathcal{E}[f] = \int d^3u \left[ \sum_{\phi} \langle \phi | f \rangle \phi(\mathbf{u}) \right]^2 = u_0^3 \sum_{\phi} \left( \langle \phi | f \rangle \right)^2, \quad (3.28)$$

it is clear that  $\mathcal{E}$  is preserved in the sum over squared  $\langle f | \phi \rangle$  coefficients. (That is,  $f$  lives in a Hilbert space, which can be spanned by the basis functions  $\{\phi\}$ .) The conserved  $\mathcal{E}$  is sometimes called the “energy” of a distribution, and partial sums of  $\langle \phi | f \rangle^2$  can be referred to as the “power.” The angular power distribution is a useful quantity:

$$\mathcal{P}_{\ell m}(u) \equiv u^2 [f_{\ell m}(u)]^2, \quad (3.29)$$

where  $f_{\ell m}(u) = \langle \ell m | f \rangle$  is the projection of  $f(\mathbf{u})$  onto the  $|\ell m\rangle$  harmonic, Eq. (3.24). Integrating  $\mathcal{P}$  over the radial coordinate provides  $\mathcal{E}_{\ell m}$ ,

$$\mathcal{E}_{\ell m} \equiv \int du \mathcal{P}_{\ell m}(u), \quad (3.30)$$

the amount of  $\mathcal{E}$  stored in the  $\ell m$  harmonic. Each of these quantities corresponds to a different partial sum over  $\langle f | n \ell m \rangle^2$  coefficients, and can be used to test the convergence of the radial and angular parts of the expansions separately.

Every term in the  $\mathcal{E}$  sum is nonnegative, so a sum over finitely many basis functions  $|\phi\rangle$  approaches  $\mathcal{E}$  from below. Labeling the  $|\phi\rangle$  functions with  $i = 0, 1, 2, \dots$  and truncating the series at  $i_{\max}$ ,

$$\sum_{i=0}^{i_{\max}} u_0^3 \langle \phi_i | f \rangle^2 \leq \mathcal{E}, \quad (3.31)$$

with the inequality saturated in the  $i_{\max} \rightarrow \infty$  limit. The difference  $\mathcal{E} - \sum_{i=0}^{i_{\max}} u_0^3 \langle \phi_i | f \rangle^2$  tracks the global accuracy of the basis expansion,

$$\Delta \mathcal{E}(i_{\max}) \equiv \mathcal{E} - \sum_{i=0}^{i_{\max}} u_0^3 \langle \phi_i | f \rangle^2, \quad (3.32)$$

and provides a strict upper bound on the size of any of the unmeasured coefficients:

$$\left| \langle \phi | f \rangle \right|_{i > i_{\max}} \leq \sqrt{\Delta \mathcal{E} / u_0^3}. \quad (3.33)$$

The bound is saturated only if all unevaluated coefficients except for  $\langle \phi | f \rangle$  are zero.

**Application to Wavelets:** For the convergence of the wavelet expansion, consider the generational power, i.e. the fraction of  $\mathcal{E}$  contained within the coefficients of fixed  $\lambda$ . In the case of Haar wavelets, take the  $\lambda \gg 1$  limit of Eq. (3.15) for a function  $f(x)$ ,  $x \in [0, 1]$ . Keeping only the first derivative term,

$$\mathcal{E}_\lambda \equiv \left. \frac{\delta \mathcal{E}}{\delta \lambda} \right|_\lambda = \sum_{\mu=0}^{2^\lambda-1} \langle f | \lambda \mu \rangle^2 \simeq \frac{4^{-\lambda}}{16} \sum_{\mu} (\Delta x) (f'_\mu)^2, \quad (3.34)$$

where  $\Delta x = 2^{-\lambda}$ , and where  $f'_\mu \equiv f'(x = x_2)$ , for  $x_2$  defined in Eq. (3.6) as the center of the  $\lambda \mu$  wavelet's base of support. In the  $\Delta x \rightarrow 0$  limit, the sum over  $(\Delta x)(f'_\mu)^2$  approaches a constant, independent of  $\Delta x$  and  $\lambda$ :

$$\lim_{\lambda \rightarrow \infty} \left[ \sum_{\mu} (\Delta x) (f'_\mu)^2 \right] = \int_0^1 dx [f'(x)]^2. \quad (3.35)$$

So,  $\delta \mathcal{E} / \delta \lambda$  decreases as  $4^{-\lambda}$  for large  $\lambda$ , indicating that the generational power is concentrated at small  $\lambda$ .

Suppose that a finite wavelet expansion includes only terms with  $\lambda < \lambda_*$ , and that  $\Delta x = 2^{-\lambda_*}$  is small enough that every  $\langle f | \lambda_* \mu \rangle$  is well approximated by the first derivative terms,  $f'_0$ . (The second condition ensures that the  $\sum_{\mu} (\Delta x) (f'_\mu)^2$  sum is approximately constant for  $\lambda \geq \lambda_*$ .) Then, the missing power contained in the missing  $\lambda \geq \lambda_*$  terms can be approximated by:

$$\Delta \mathcal{E} \equiv \sum_{\lambda=\lambda_*}^{\infty} \frac{\delta \mathcal{E}}{\delta \lambda} \simeq \left( \frac{4^{-\lambda_*}}{12} \right) \left[ \sum_{\mu=0}^{2^{\lambda_*}-1} 2^{-\lambda_*} (f'_\mu)^2 \right] \simeq \left( \frac{4^{-\lambda_*}}{12} \right) \int_0^1 dx [f'(x)]^2. \quad (3.36)$$

The term in brackets is the same, approximately constant term whose large  $\lambda$  limit is given in Eq. (3.35). Noting that the  $\lambda < \lambda_*$  wavelet expansion includes a total of  $n_{\text{coeffs}} = 2^{\lambda_*}$  coefficients, the missing energy scales as

$$\Delta \mathcal{E} \propto \left( \frac{1}{n_{\text{coeffs}}} \right)^2. \quad (3.37)$$

In conclusion, the wavelet expansion converges very quickly as  $\lambda$  is increased. The spherical wavelets converge similarly with  $n_{\text{coeffs}}$ , though with a few additional factors in Eq. (3.36).

For comparison, in the analogous limit where the function  $f(x)$  varies slowly compared to  $\sin(n\pi x)$ , the individual coefficients in a Fourier-type series scale as  $1/n$ . So, from  $\sum_{n > n_{\text{coeffs}}} n^{-2} \approx 1/n_{\text{coeffs}}$  in the limit of large  $n$ , the harmonic-type series converge as  $\Delta \mathcal{E} \propto 1/n_{\text{coeffs}}$ .

In applications where very high precision is required, the  $n_{\text{coeffs}}$  of Eq. (3.37) can still be rather large. However, thanks to the wavelet extrapolation procedure of Section 3.2, only a small fraction of these coefficients need to be calculated from the inner products  $\langle f | n \rangle$ . A  $k$ th order method can predict  $(n_{\text{coeffs}}^{\text{int.}})^k$  coefficients from an initial set of  $n_{\text{coeffs}}^{\text{int.}}$  integrated coefficients, at the same level of precision in  $\Delta \mathcal{E}$ :

$$\Delta \mathcal{E} \propto \left( \frac{1}{n_{\text{coeffs}}^{\text{int.}}} \right)^{2k}. \quad (3.38)$$

### 3.4 Analytic Result for Kinematic Scattering Matrix

The scattering rate depends on three objects which might require numeric integration:  $\langle g_\chi | \phi \rangle$ ,  $\mathcal{I}^{(\ell)}$  and  $\langle \varphi | f_S^2 \rangle$ . Of these objects, the kinematic scattering matrix  $\mathcal{I}^{(\ell)}$  appears to be the most expensive: it is a four dimensional array over  $\ell, n, j, n'$ , with coefficients that depend on  $m_\chi$  and  $F_{\text{DM}}$  via the 3d integral Eq. (2.17). In this section I show that the matrix elements can be integrated analytically in the wavelet-harmonic basis of Section 3.

Consider any basis where  $r_n(v)$  and  $R_{jn'}(E, q)$  are piecewise-constant functions of  $v$  and  $q$ . In the  $(v, q)$  plane at some fixed value of  $E$ , the product  $r_n(v)R_{jn'}(E, q)$  is piecewise-constant on some grid of rectangular regions. Let us focus on just one of these rectangular regions, bounded by  $v_a \leq v \leq v_b$ ,  $q_a \leq q \leq q_b$ , where

$$\tilde{r}_{jn'}(E, q) \equiv \bar{r}_j(E) \cdot A_{n'}^{(q)}, \quad r_n(v) = A_n^{(v)}. \quad (3.39)$$

This derivation is not specific to Haar wavelets, but the results will be easily applied to that case.

Separating the  $E$  integral from  $d^3v d^3q$ , define:

$$\mathcal{I}_{n,jn'}^{(\ell)} \equiv \frac{q_0^3/v_0^3}{2m_\chi\mu_\chi^2} \int_0^\infty \frac{dE}{E_0} \bar{r}_j(E) \cdot A_{n'}^{(q)} A_n^{(v)} \times \left( \frac{q_\star^2 v_\star^2}{q_0^2 v_0^2} I_\star^{(\ell)}(E) \right), \quad (3.40)$$

$$I_\star^{(\ell)}(E) \equiv \int_{q_a}^{q_b} \frac{q dq}{q_\star^2} F_{\text{DM}}^2(q) \int_{v_a}^{v_b} \frac{v dv}{v_\star^2} P_\ell\left(\frac{v_{\min}}{v}\right) \Theta(v - v_{\min}(q, E)). \quad (3.41)$$

To simplify the upcoming algebra, I define  $q_\star(m_\chi, E)$  and  $v_\star(m_\chi, E)$  as follows:

$$q_\star \equiv \sqrt{2m_\chi E}, \quad v_\star \equiv \frac{q_\star}{m_\chi}, \quad E = \frac{1}{2} q_\star v_\star, \quad v_{\min} = \frac{v_\star}{2} \left( \frac{q}{q_\star} + \frac{q_\star}{q} \right). \quad (3.42)$$

The minimum possible value of  $v_{\min}$  occurs at  $q = q_\star$ :

$$\min(v_{\min}(q)) = v_{\min}(q = q_\star) = v_\star. \quad (3.43)$$

The function  $P_\ell$  is a polynomial of degree  $\ell$ , so the velocity integral can be completed easily, as shown in Appendix B. Eq. (B.35) summarizes the general solution for  $I_\star^{(\ell)}$  as a function of  $q_{a,b}$ ,  $v_{a,b}$ ,  $q_\star$  and  $v_\star$ , for the case where  $F_{\text{DM}}(q)$  is a monomial

$$F_{\text{DM}}(q) = (\alpha m_e / q)^\nu \quad (3.44)$$

for some power  $\nu$ . The result for  $I_\star^{(\ell)}$  takes the form

$$I_\star^{(\ell)} = \left( \frac{\alpha m_e}{q_\star} \right)^{2\nu} \left( U_\nu^{(\ell)}(v_b, [q_1, q_2]) + T_\nu^{(\ell)}([v_a, v_b], [q_2, q_3]) + U_\nu^{(\ell)}(v_b, [q_3, q_4]) \right), \quad (3.45)$$

where  $U$  and  $T$  are analytic functions of  $v_\star$  and  $q_\star$  provided in Appendix B, and where  $q_{1\dots 4}$  are given by  $q_a, q_b$ , or by the solutions to  $v_a = v_{\min}(q_\pm)$  and  $v_b = v_{\min}(\tilde{q}_\pm)$ .

In the case of discrete final states,  $\bar{r}_j(E) \rightarrow E_0 \delta(E - \Delta E_j)$ ,

$$\mathcal{I}_{n,jn'}^{(\ell)}(E = \Delta E_j) = \frac{q_0/v_0^5}{2m_\chi\mu_\chi^2} A_{n'}^{(q)} A_n^{(v)} \times 4(\Delta E_j)^2 I_\star^{(\ell)}(\Delta E_j). \quad (3.46)$$

For continuum final states, this  $I_\star^{(\ell)}(E)$  is sufficient for finding the differential rate  $dR/dE$ . In applications where the integral over  $E$  must also be completed, following Eq. (1.1),  $\mathcal{I}^{(\ell)}$  is found by

integrating  $I_\star^{(\ell)}(E)$  together with the energy basis functions  $\bar{r}_j(E)$ . Both  $q_\star^2$  and  $v_\star^2$  are proportional to  $E$ ; and with the exception of a dilogarithm  $\propto \text{Li}_2(1/E)$ , most of the terms in  $T^{(\ell)}$  and  $U^{(\ell)}$  are polynomials or logarithms in  $E$  or  $1/E$ , as long as  $\nu$  is integer-valued. So, as long as simple basis functions are used for  $\tilde{r}_j(E)$ , it is likely that this final integral can be completed analytically.

In the spherical wavelet basis,  $\mathcal{I}_{n,jn'}^{(\ell)}$  generally receives contributions from four regions (if  $n \neq 0$  and  $n' \neq 0$ ), with  $A_{n'}^{(q,v)} \rightarrow [A_{n'}^{(q,v)}, -B_{n'}^{(q,v)}]$ , with  $A$  and  $B$  defined in Eq. (3.7) and Eq. (3.8) in terms of the bases of support for the  $(q)$  and  $(v)$  wavelet functions. More generally,  $\mathcal{I}$  can be assembled for any piecewise-constant basis functions from the expression given in Eq. (3.45). Because  $\mathcal{I}^{(\ell)}$  is linear in  $F_{\text{DM}}^2$ , this method also provides a solution to  $\mathcal{I}$  if  $F_{\text{DM}}$  is a power series, i.e. if  $F_{\text{DM}}^2 \sim \sum_p c_p q^p$ . For other functional forms of  $F_{\text{DM}}(q)$ , the steps in Appendix B would need to be repeated with the new  $F_{\text{DM}}^2$ .

### 3.5 Summary

There are now four good reasons to use the spherical wavelet-harmonic basis:

1. The kinematic scattering matrix  $\mathcal{I}^{(\ell)}$  can be integrated analytically for piecewise-constant basis functions.
2. As measured by the “missing (distributional) energy” in Eq. (3.37), the wavelet series converges to the correct value as  $1/n_{\text{coeffs}}^2$ , where  $n_{\text{coeffs}}$  is the number of coefficients included in the expansion. Other examples, e.g. Fourier or Bessel series, converge more slowly as  $1/n_{\text{coeffs}}$ .
3. The wavelet extrapolation method allows the large  $n$  coefficients to be evaluated from the derivatives of the function, via Eq. (3.22), rather than from integrating the inner products  $\langle \phi_{nlm} | f \rangle$ .
4. From Eq. (3.13), the computational difficulty in evaluating  $\langle nlm | f \rangle$  actually drops for large  $n$  wavelets, so that the integration time grows logarithmically with the number of coefficients to be calculated. For other basis choices, the integration time scales as some power of  $n_{\text{coeffs}}$  (e.g. linearly or quadratically).

Combining the  $1/n_{\text{coeffs}}^2$  convergence of  $\mathcal{E}$  with the  $k$ th order extrapolation method, the integration time not only scales logarithmically with the precision goal  $\Delta\mathcal{E}$ , it does so with an additional numeric factor:

$$N_{\text{evals}}^{(\text{wavelet})} \propto \frac{1}{4^k} \log_2(1/\Delta\mathcal{E}), \quad (3.47)$$

with e.g.  $k = 3$  for the cubic extrapolation method. For comparison, the integration time for a harmonic radial function (Fourier/Bessel/etc.) scales as

$$N_{\text{evals}}^{(\text{harmonic})} \propto n_{\text{coeffs}}^p \propto (\Delta\mathcal{E})^{-p}, \quad (3.48)$$

with  $p = 2$  unless special efforts are made to handle the oscillatory part of the Fourier integrals.

## 4 Demonstrations for Direct Detection

In this section I test the convergence of the spherical wavelet expansion and perform a mock direct detection analysis, for a particle-in-a-box  $f_S^2$  example, and a  $g_\chi$  that is a sum of four gaussians,

$$g_\chi(\mathbf{v}) = 0.4 g_{(0)}(\mathbf{v}) + 0.3 g_{(1)}(\mathbf{v}) + 0.2 g_{(2)}(\mathbf{v}) + 0.1 g_{(3)}(\mathbf{v}), \quad (4.1)$$

$$g_{(i)}(\mathbf{v}, \mathbf{v}_i, \bar{v}_i) = \frac{1}{\pi^{3/2} \bar{v}_i^3} \exp\left(-\frac{|\mathbf{v} - \mathbf{v}_i|^2}{\bar{v}_i^2}\right), \quad (4.2)$$

with parameters given in the following table:

index	$\mathbf{v}_i$ [km/s]	$\bar{v}_i$
(0)	$(-230\hat{z})$	220 km/s
(1)	$(+80\hat{x} - 80\hat{z})$	70 km/s
(2)	$(-120\hat{x} - 250\hat{y} - 150\hat{z})$	50 km/s
(3)	$(+50\hat{x} + 30\hat{y} - 400\hat{z})$	25 km/s

(4.3)

This roughly approximates a galaxy with a DM halo,  $g_{(0)}$ , and three large and increasingly narrow streams,  $g_{(1,2,3)}$ . Incidentally, this is the type of model that might call for repeating the analysis for many similar  $g_\chi$  distributions: each gaussian is described by 5 parameters,  $(c_i, \mathbf{v}_i, \bar{v}_i)$ , any of which might be varied.

To demonstrate the scattering rate part of the calculation, a  $g_\chi$  model must be paired with a detector form factor,  $f_S^2(\mathbf{q}, E)$ . For the detector form factor,  $f_S^2(\mathbf{q}, E)$ , I use a model where a single particle of mass  $m$  is confined to a rectangular box with sides of length  $(L_x, L_y, L_z)$ , with position space wavefunction

$$\Psi_{\mathbf{n}} = \frac{2^{3/2}}{\sqrt{V_{\text{cell}}}} \sin \frac{\pi n_x x}{L_x} \sin \frac{\pi n_y y}{L_y} \sin \frac{\pi n_z z}{L_z}, \quad (4.4)$$

where  $V_{\text{cell}} = L_x L_y L_z$  is the volume of the microscopic unit cell. The macroscopic detector target consists of  $N_T$  of these unit cells, with a total volume of  $V_T = N_T V_{\text{cell}}$ . The final states are excitations above the  $n_{x,y,z} = 1$  ground state, with discrete energies

$$\Delta E_{\mathbf{n}} = \frac{\pi^2}{2m} \left( \frac{n_x^2 - 1}{L_x^2} + \frac{n_y^2 - 1}{L_y^2} + \frac{n_z^2 - 1}{L_z^2} \right). \quad (4.5)$$

In the notation of Eq. (1.7),  $f_S^2(\mathbf{q}, E) = \delta(E - \Delta E_{\mathbf{n}}) f_s^2(\mathbf{q})$  can be written in terms of a 3d momentum form factor,

$$f_s(\mathbf{q}) = \left\langle \Psi_{\mathbf{n}}(\mathbf{r}) \left| e^{i\mathbf{q}\cdot\mathbf{r}} \right| \Psi_0(\mathbf{r}) \right\rangle = \left\langle \tilde{\Psi}_{\mathbf{n}}(\mathbf{k} + \mathbf{q}) \left| \tilde{\Psi}_0(\mathbf{k}) \right. \right\rangle, \quad (4.6)$$

which in this example can be evaluated analytically. The result:

$$f_s(\mathbf{q}) = e^{i\mathbf{q}\cdot\mathbf{L}/2} \prod_{j=x,y,z} \frac{e^{-iq_j L_j/2} + (-1)^{n_j} e^{iq_j L_j/2}}{-2i} \left[ \frac{2q_j L_j}{(q_j L_j)^2 - \pi^2(n_j - 1)^2} - \frac{2q_j L_j}{(q_j L_j)^2 - \pi^2(n_j + 1)^2} \right], \quad (4.7)$$

where  $\mathbf{L} \equiv (L_x, L_y, L_z)$ .

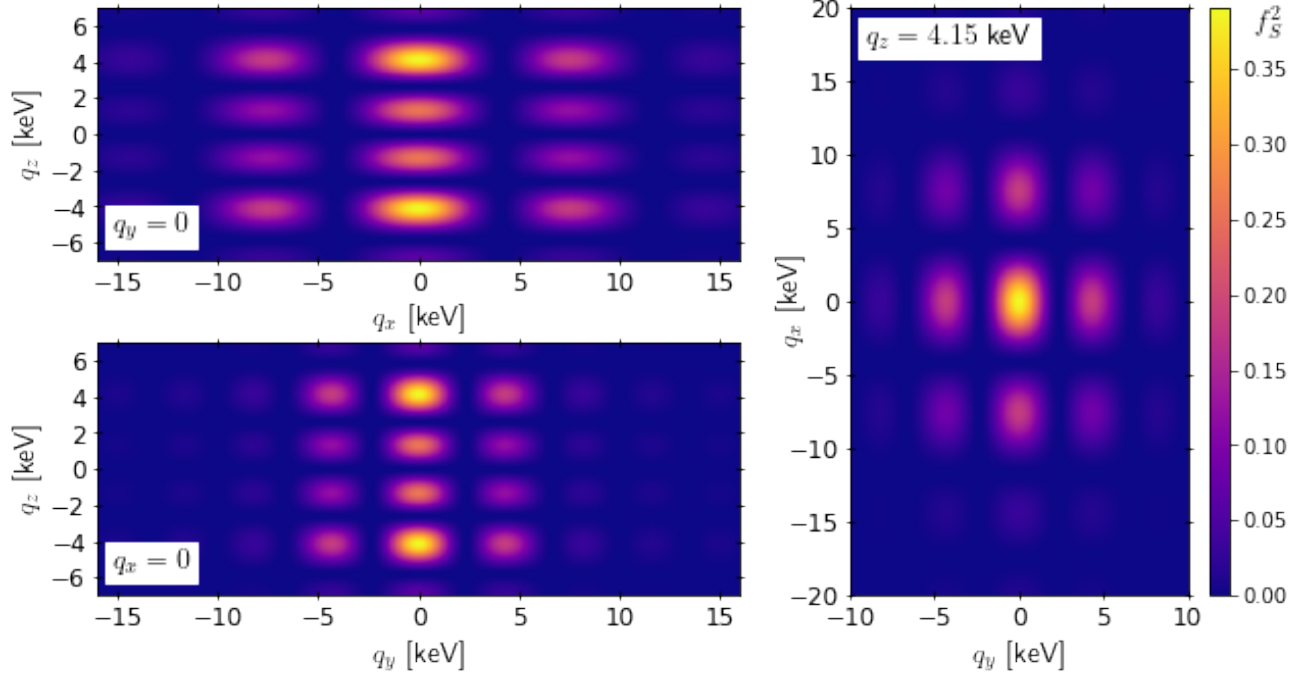


Figure 2: Values of  $f_s^2(\mathbf{q})$  for the  $\mathbf{L} = (4a_0, 7a_0, 10a_0)$  particle-in-a-box example, evaluated on the planes  $q_x = 0$ ,  $q_y = 0$ , and  $q_z = 4.15$  keV (clockwise from lower left corner) for scattering to the  $n_z = 2$  excited state. This form factor is maximized at  $\mathbf{q} = \pm(4.15 \text{ keV})\hat{z}$ , where  $f_s^2(\mathbf{q}) = 0.391$ .

As a sanity check, consider the  $\mathbf{q} \rightarrow \mathbf{0}$  limits of this form factor. When the final state matches the ground state,  $n_j = 1$ , then  $f_s(\mathbf{0}) = \langle \Psi_0 | \Psi_0 \rangle = 1$ . This is true for Eq. (4.7): each term in the product reduces to  $\text{sinc}(q_j L_j / 2)$  in the  $q_j \ll L_j^{-1}$  limit, so the product approaches 1 as  $q \rightarrow 0$ . In the  $\mathbf{n} \neq (1, 1, 1)$  case, where the final state is not the ground state, the orthogonality of the energy eigenstates implies  $f_s(\mathbf{0}) = 0$ . From the product in Eq. (4.7), we see that taking  $q_j = 0$  with  $n_j \neq 1$  sets this term to zero, so that the product vanishes as expected.

What matters for the rate calculation is  $|f_s|^2$ . Noting that  $\cos^2(\phi) = \sin^2(\phi \pm \frac{\pi}{2}(n \pm 1))$  for even  $n$ , and  $\sin^2(\phi) = \sin^2(\phi \pm \frac{\pi}{2}(n \pm 1))$  for odd  $n$ , each term can be rewritten to be explicitly finite for all  $\mathbf{q}$ :

$$f_s^2(\mathbf{q}) = \prod_{j=x,y,z} \left[ \frac{\text{sinc}\left(\frac{|q_j L_j| - \pi(n_j - 1)}{2}\right)}{1 + \pi(n_j - 1)/|q_j L_j|} - \frac{\text{sinc}\left(\frac{|q_j L_j| - \pi(n_j + 1)}{2}\right)}{1 + \pi(n_j + 1)/|q_j L_j|} \right]^2. \quad (4.8)$$

In the large  $q_j \gg L_j^{-1}$  limit,  $f_j^2(q_j) \propto 1/q_j^2$ . So, along an arbitrary direction  $\hat{q}$  not aligned with any of the axes,  $f_s^2(\mathbf{q}) \propto 1/q^6$  once  $q_j \gg L_j^{-1}$  for all three  $j = x, y, z$ . However, on-axis, i.e.  $\hat{q} \approx \pm\hat{x}, \pm\hat{y}, \pm\hat{z}$ , the form factor falls off more slowly, as  $f_s^2(\mathbf{q}) \propto 1/q^2$ .

In the general case with distinct  $L_x$ ,  $L_y$ , and  $L_z$ , the box has three  $\mathbb{Z}_2$  symmetries, i.e.  $q_j \rightarrow -q_j$  for any of  $j = x, y, z$ . As a result, many of the  $\langle \ell m | f_s^2 \rangle$  coefficients vanish: those with odd  $m$ , odd  $\ell$ , or  $m < 0$ . For the special case of a square prism,  $L_x = L_y$ , the symmetry group expands to  $\mathbb{Z}_2 \times \mathbb{Z}_4 \times \mathbb{Z}_2$ , implying that  $\langle \ell m | f_s^2 \rangle = 0$  unless  $m$  is a multiple of 4. These  $m$ -related simplifications are orientation-specific, occurring only when the  $\hat{z}$  direction is aligned with one of the symmetry axes. On the other hand, the restriction of  $\ell$  to even values is generic: it is a consequence of the central inversion symmetry  $\mathbf{q} \rightarrow -\mathbf{q}$  of the crystal, which remains a symmetry of the coordinate



system even when the detector is rotated.

To demonstrate the vector space version of the rate calculation, I take  $m = m_e$  for the particle mass, in an asymmetric box with  $(L_x, L_y, L_z) = (4a_0, 7a_0, 10a_0)$ , where  $a_0 = 1/(\alpha m_e)$  is the Bohr radius. The first excited state is  $\mathbf{n} = (1, 1, 2)$ , with  $\Delta E \simeq 4.03$  eV. Figure 2 shows three cross sections of the  $f_s^2(\mathbf{q})$  function: planes at fixed  $q_x = 0$ ,  $q_y = 0$ , and  $q_z = 4.15$  keV, respectively. The global maxima of  $f_s^2(\mathbf{q})$  occur at  $q_x = q_y = 0$  with  $q_z = \pm 4.15$  keV, where  $f_s^2 = 0.391$ .

**Projections of  $|g_\chi\rangle$  for gaussian functions:** To accelerate the evaluation of the inner products  $\langle g_\chi | n\ell m \rangle$ , I used properties of spherical harmonics to perform the angular integrals analytically. This method is described briefly in Section 5.3, and in greater detail in Appendix D.

For a function  $g_\chi$  that is the sum of  $k$  gaussians,

$$g_\chi(\mathbf{v}) = \sum_{i=1}^k \frac{c_i}{\bar{v}_i^3 \pi^{3/2}} \exp\left(-\frac{|\mathbf{v} - \mathbf{v}_i|^2}{\bar{v}_i^2}\right), \quad (4.9)$$

the inner product  $\langle g_\chi | n\ell m \rangle$  can be simplified to

$$\langle g_\chi | n\ell m \rangle = \sum_{i=1}^k c_i \frac{Y_{\ell m}(\hat{v}_i)}{v_0^3} \mathcal{G}_{n\ell}(v_i, \bar{v}_i), \quad (4.10)$$

$$\mathcal{G}_{n\ell}(v_i, \bar{v}_i) = \frac{4}{\sqrt{\pi}} \int_0^\infty \frac{v^2 dv}{\bar{v}_i^3} r_n^{(\ell)}(v) e^{-(v^2 + v_i^2)/\bar{v}_i^2} i_\ell^{(1)}\left(\frac{2v_i v}{\bar{v}_i^2}\right). \quad (4.11)$$

In this example,  $c_i = \{0.4, 0.3, 0.2, 0.1\}$ ;  $\mathbf{v}_i$  and  $\bar{v}_i$  from Eq. (4.3) describe the location and width of the gaussians; and, in the equations for  $\mathcal{G}_{n\ell}$ ,  $v_i \equiv |\mathbf{v}_i|$  and  $\hat{v}_i = \mathbf{v}_i/v_i$  are the magnitude and unit vector for each  $\mathbf{v}_i$ . Here  $i_\ell^{(1)}$  is the  $\ell$ th modified spherical Bessel function of the first kind, which appears in the spherical harmonic expansion of  $\exp(-2\mathbf{v} \cdot \mathbf{v}_i/\bar{v}_i^2)$ ; and  $r_n^{(\ell)}$  and  $v_0$  describe the velocity basis functions. Rather than evaluating 3d integrals for each  $(n\ell m)$ , we need only to integrate a version of the 1d integral  $\mathcal{G}_{n\ell}$  for each pair of  $(n, \ell)$ , for each gaussian contribution to  $g_\chi$ . As a result, the evaluation of  $|g_\chi\rangle$  is extremely fast compared to  $|f_s^2\rangle$ , especially in the limit of large  $\ell$ .

## 4.1 Angular Convergence

Components (0) and (1) of the Eq. (4.3) velocity model have  $v_i \sim \sigma_i$ , and would appear on large fractions of the sky. Streams (2) and (3) are localized on the sky: using  $\vartheta_i = \sigma_i/v_i$  as an estimate of the angular scale,

$$\vartheta_2 \sim 12^\circ, \quad \vartheta_3 \sim 3.6^\circ. \quad (4.12)$$

Narrow features in  $g$  map onto wide features in  $|\ell m\rangle$  frequency space. From  $\vartheta_i$ , one expects  $\langle g | \ell m \rangle$  to peak around  $\ell_{\text{peak}} \sim 180^\circ/\vartheta$ , with substantial support at neighboring  $\ell \sim \mathcal{O}(\ell_{\text{peak}})$ . For stream (2),  $\ell_{\text{peak}} \sim 15$ ; for (3) the expectation is  $\ell_{\text{peak}} \sim 50$ . To accurately reconstruct either feature, we should continue the harmonic expansion out to some  $\ell_{\text{max}} \gg \ell_{\text{peak}}$ .

In this case,  $g = \sum_i c_i g^{(i)}$  is a sum of gaussian functions  $g^{(i)}$ , the  $\langle g | \ell m \rangle$  integral can be completed analytically. Appendix D provides the derivation, with the result given in Eq. (4.11).

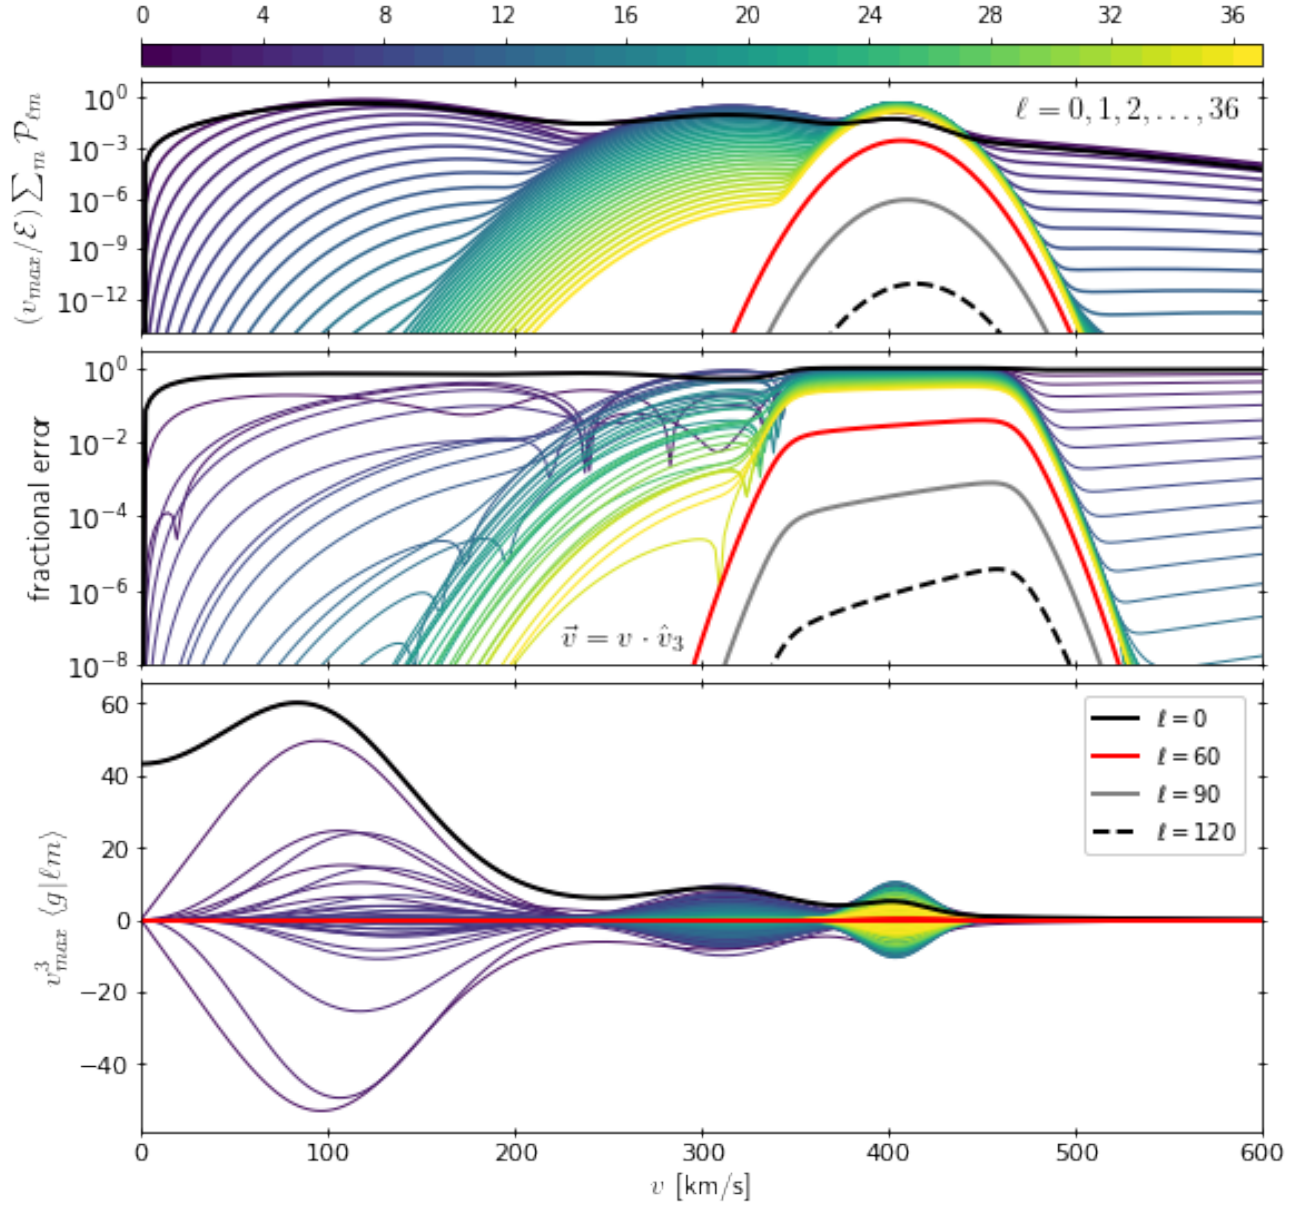


Figure 3: A sequence of  $g_{\ell m}(v) = \langle g | \ell m \rangle$  radial functions demonstrates the convergence of the spherical harmonic expansion, for  $0 \leq \ell \leq 36$  and  $-\ell \leq m \leq \ell$  in the Eq. (4.3) model. The lower panel shows  $g_{\ell m}(v)$  in units of  $v_{\max}^{-3}$  for all  $\ell \geq 36$ , with the color bar indicating the value of  $\ell$  in each line, except for the special values  $\ell = 0$  (in black) and  $\ell = 60$  (in red). The small  $v$  behavior,  $\langle g | \ell m \rangle \propto v^\ell$ , is visible by eye in the  $\ell = 0, 1, 2$  cases. In the upper panel, the angular power  $\sum_m \mathcal{P}_{\ell m}(v)$  is shown for each  $\ell$  in units of  $\mathcal{E}/v_{\max}$ , with  $\ell = 90$  and  $\ell = 120$  added to show the convergence in the large  $\ell$  limit. In each case the scale  $v_{\max}$  is arbitrary, set here to  $v_{\max} = 960$  km/s. In the middle panel, showing the absolute fractional error,  $|g(\mathbf{v}) - \sum_{\ell m}^{\ell_{\max}} g_{\ell m}(v) | \ell m \rangle| / g(\mathbf{v})$ , the velocity  $\mathbf{v}$  follows a ray  $\mathbf{v} = v \hat{v}_3$  that passes through the center of the narrowest gaussian.

This makes it easy to compare the inverse wavelet transformation,  $\sum_n \langle n\ell m | g_\chi \rangle |n\rangle$ , to the exact result for  $g_{\ell m}(v)$ . Figure 3 shows  $\langle g | \ell m \rangle$  for  $0 \leq \ell \leq 36$ , for the spherical harmonic projection

$$g_{\ell m}(v) \equiv \langle g | \ell m \rangle = \int d\Omega Y_{\ell m}(\Omega) g(\mathbf{v}) \quad (4.13)$$

as a function of  $v$ . The upper panel shows the distributional power from Eq. (3.29),

$$\mathcal{P}_{\ell m}(u) \equiv u^2 \langle g | \ell m \rangle^2, \quad \sum_{\ell m} \int du \mathcal{P}_{\ell m}(u) = \mathcal{E}[g], \quad (4.14)$$

summed over  $m = -\ell, -\ell + 1, \dots, \ell$ . From Figure 3, it is clear that the (0) and (1) components of  $g(\mathbf{v})$  are well described by the first  $\ell \lesssim 10$  angular modes. In the inner  $v \lesssim 200$  km/s region of the main panel, every  $g_{\ell m}(v)$  with  $\ell \gtrsim 10$  is indistinguishable from zero, and  $\mathcal{P}_\ell(v)$  drops quickly for increasing  $\ell$ . At larger  $v > 200$  km/s, on the other hand, Gaussians (2) and (3) generate substantial contributions to the  $\ell > 10$  harmonics. For (2), most of the support is on  $10 \lesssim \ell \lesssim 20$ , exactly as expected from the characteristic  $\sigma_i/v_i \sim 12^\circ$  angular scale. For the narrowest gaussian, (3), the power  $\mathcal{P}_{\ell m}$  peaks around  $\ell \sim 25$ , and is still substantial at  $\ell = 36$ .

By  $\ell = 60$  the contributions from  $g_{\ell m}$  are relatively small, leading to a barely perceptible thickness in the red line on the lower panel. The upper panel of Figure 3 shows that the power has decreased to  $\mathcal{P}_{\ell=60} \sim 10^{-3} \mathcal{E}/v_{\max}$ . At  $\ell = 90$ , the power near  $v \approx 400$  km/s has decreased to one part in  $10^6$ , suggesting that the local values of  $g \simeq \sum_{\ell m} g_{\ell m} | \ell m \rangle$  would be accurate to about one part in  $10^3$ , i.e.  $\propto \sqrt{\Delta \mathcal{E}}$ . Likewise,  $\mathcal{P}_{\ell=120} \sim 10^{-12} \mathcal{E}/v_{\max}$  suggests that Gaussian (3) is resolved to a local precision of about  $10^{-6}$  at this level of the expansion.

The middle panel of Figure 3 shows the local relative accuracy,

$$|\text{fractional error}| \equiv \frac{1}{g(\mathbf{v})} \left| g(\mathbf{v}) - \sum_{\ell m}^{\ell_{\max}} g_{\ell m}(v) | \ell m \rangle \right|, \quad (4.15)$$

as a function of  $\mathbf{v} = v\hat{v}_3$ . This line in  $\mathbf{v}$  is chosen to pass directly through the center of the narrow Gaussian (3). Figure 3 demonstrates that  $\ell = 120$  captures the difficult region of  $g(\mathbf{v})$  to a precision of one part in  $10^6$ , while  $\ell = 90$  has a fractional error no larger than  $10^{-3}$ . Elsewhere, away from the peak at 400 km/s, the harmonic expansion converges more quickly. Comparing the large  $\ell$  limits of the middle and upper panels confirms that the power  $\mathcal{P}_{\ell m}$  is a useful proxy for the local error: in each case, the fractional error scales like  $\sqrt{\mathcal{P}_\ell}$ .

For  $\ell \gg 50$ , the spherical harmonics oscillate more quickly than any of the features in  $g(\mathbf{v})$ . This is the regime where the accuracy of the 1d Fourier series scales like  $1/n_{\text{coeffs}}$ . In the middle panel, the  $\ell > 60$  fractional errors scale like  $1/\ell^2$ : and, noting that  $n_{\text{coeffs}} = (\ell_{\max} + 1)^2$  for the spherical harmonics of  $\ell \leq \ell_{\max}$ ,  $|m| \leq \ell$ , we find a scaling

$$\Delta \mathcal{E} \propto \frac{1}{n_{\text{coeffs}}^2}, \quad \max(|\text{fractional error}|) \propto \sqrt{\Delta \mathcal{E}} \sim \frac{1}{n_{\text{coeffs}}} \quad (4.16)$$

for resolving narrow isolated sources like Gaussian (3).

**Aside:** The large  $\ell \sim 10^2$  part of the expansion was made much easier by the analytic result given in Eq. (4.11). After expanding the dot product in  $\exp(-|\mathbf{v} - \mathbf{v}_i|^2/\bar{v}_i^2)$  in spherical harmonics, the  $\langle g_\chi | \ell m \rangle$  integrals are evaluated analytically. The remaining integrand depends only on  $n$  and  $\ell$ , not  $m$ ; so, all  $2\ell + 1$  coefficients  $\langle g_\chi | n\ell m \rangle$  with  $|m| \leq \ell$  for fixed  $n, \ell$  can be derived from a single, one-dimensional integral involving the  $n$ th radial basis function and the  $\ell$ th modified spherical Bessel function of the first kind. For details, see Appendix D.

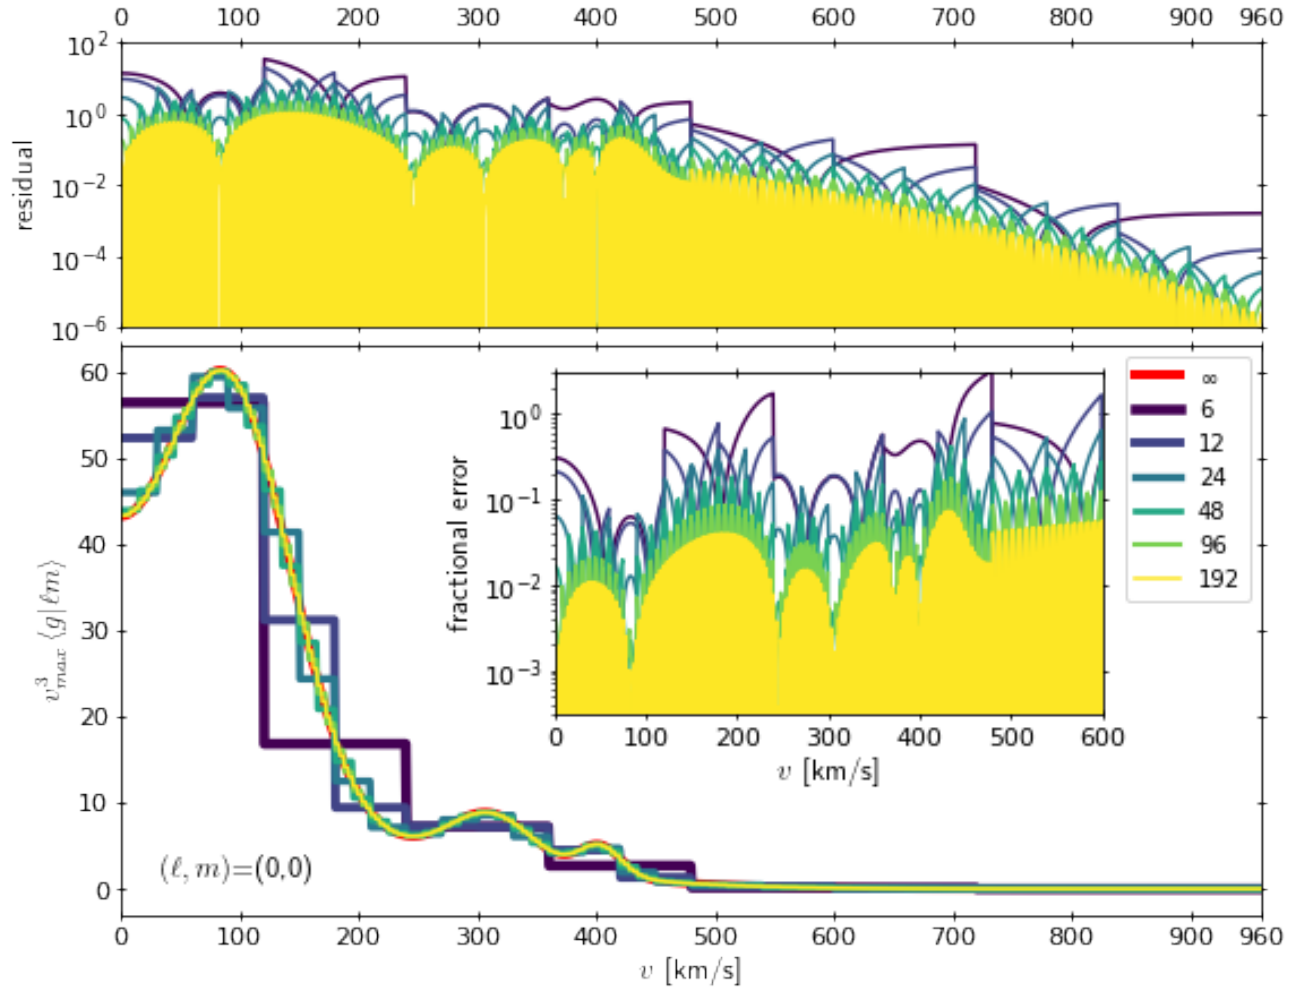


Figure 4: Comparing  $\sum_n \langle g | n \ell m \rangle |n\rangle$  against the continuous function  $g_{\ell m}(v) = \langle g | \ell m \rangle$  to test the convergence of the radial basis expansion, for the four-gaussian function  $g(\mathbf{v})$  from Eq. (4.3). This example uses  $\ell = m = 0$ , with  $v_{\max} = 960$  km/s for the basis functions. Because the interesting features of  $g(\mathbf{v})$  are concentrated at  $v \lesssim 500$  km/s, we take  $n_{\text{coeffs}} = 6, 12, 24, \dots$  so as to provide finer resolution in the  $v \leq \frac{1}{2}v_{\max}$  region. In the main panel, the functions  $\sum_n \langle g | n \ell m \rangle |n\rangle$  converge towards the exact result,  $g_{\ell m}(v)$  (shown underneath in red). The upper panel shows the absolute value of the residual function,  $|g_{\ell m}(v) - \sum_n \langle g | n \ell m \rangle |n\rangle|$ , while the inset shows this quantity divided by  $g_{\ell m}(v)$ . Starting around  $n_{\text{coeffs}} \gtrsim 24$ , each successive generation of wavelets (doubling  $n_{\text{coeffs}}$ ) reduces the error by a factor of 2, as predicted in Section 3.2. For  $n = 96$  and  $n = 196$ , the fractional error plot is essentially showing  $g'_{\ell m}(v)$ , with the smallest error where  $g'_{\ell m}(v) \approx 0$ .

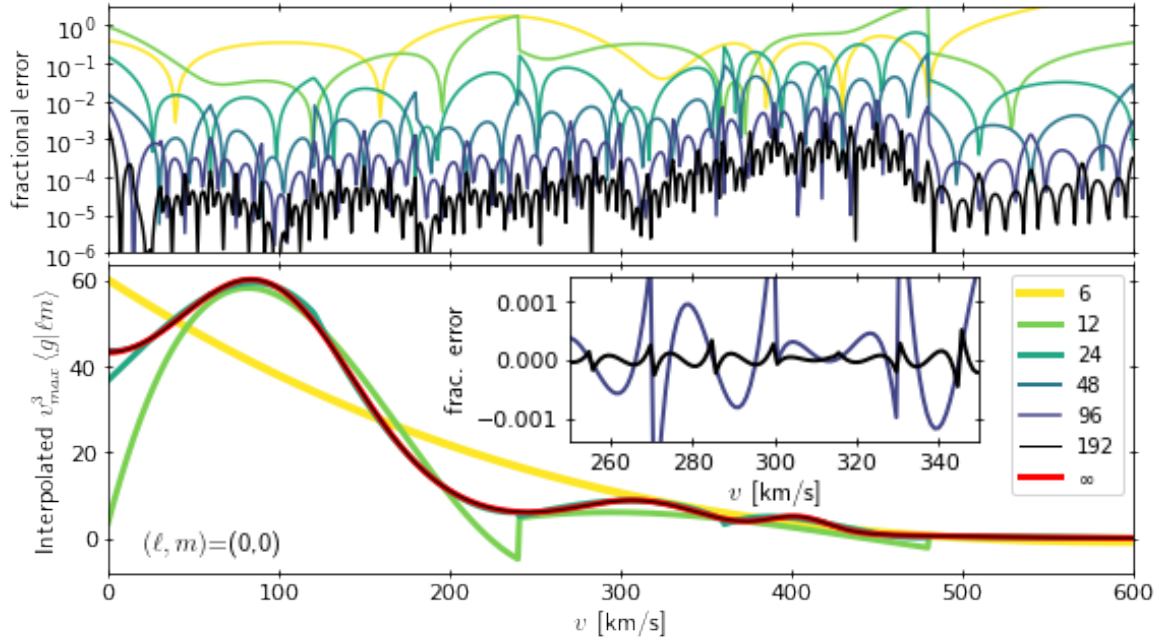


Figure 5: The derivatives  $g_{\ell m}^{(p)}$  are extracted from the  $n_{\text{coeffs}}$  using the cubic method, and used to define interpolating functions  $\bar{g}_{\ell m}(v)$ . At larger  $n_{\text{coeffs}}$ , the local accuracy improves  $\propto n_{\text{coeffs}}^3$ , as shown in the upper panel. The inset reveals the residual functions  $g_{\ell m}(v) - \bar{g}_{\ell m}(v)$  to have cubic or quartic profiles within each bin. For  $n_{\text{coeffs}} \geq 24$ ,  $\bar{g}_{\ell m}$  matches  $g_{\ell m}$  up to a few percent (or better).

## 4.2 Radial Convergence (Velocity Distribution)

Figure 4 demonstrates the convergence of the radial function expansion, comparing the exact value of  $\langle g_{\chi} | \ell m \rangle$  to the inverse wavelet transformation  $\sum_{n=0}^{n_{\text{max}}} \langle g_{\chi} | n \ell m \rangle |n\rangle$ . The absolute value of the residual,  $g_{\ell m}(v) - \sum_{n=0}^{n_{\text{max}}} \langle g_{\chi} | n \ell m \rangle |n\rangle$ , is shown in the upper panel, while the fractional error is shown in the inset. Each generation doubles the number of coefficients included in the sum, with  $n_{\text{coeffs}} = n_{\text{max}} + 1$  given values of 6, 12, 24,  $\dots$ , 192. This half-integer number of generations,  $n_{\text{coeffs}} = \frac{3}{4}2^{\lambda}$ , provides better precision at  $v \leq 480$  km/s, where  $g_{\chi}(\mathbf{v})$  is largest.

With  $n_{\text{coeffs}} \leq 24$  the wavelet reconstruction is not particularly accurate, though it does reflect the coarsest features of the function. To consistently resolve  $g_{\ell m}(v)$  with better than 10% precision, one must use  $n_{\text{coeffs}} = 96$ , or  $n_{\text{coeffs}} = 192$  in the vicinity of the narrow gaussian at  $v \sim 400$  km/s. Regions with  $g'_{\ell m}(v) \approx 0$  are easier to model accurately: see the dips in fractional error where  $g_{\ell m}(v)$  reaches a local maximum or minimum.

Starting around  $n_{\text{coeffs}} = 48$ , the fractional error of each successive wavelet generation is reduced by factors of 2. This is exactly what Section 3.2 leads us to expect. Following the notation of Eq. (3.18), and noting the “oscillations” in  $g_{\ell m}(v)$  on scales of about 100 km/s, one might select  $\delta x \sim (100/960)/2\pi \approx 1/60$  as the scale at which the Taylor series expansion becomes precise, i.e.  $\lambda \approx 6$ . For  $\lambda \geq 7$  (i.e.  $n_{\text{coeffs}} = 96, 192, \dots$ ) the value of  $\langle g_{\ell m} | n \rangle$  should be fairly well approximated by the linear term in Eq. (3.22).

Incidentally, this is the regime in which the cubic extrapolation method outlined in Section 3.2 becomes precise. Figure 4, for example, implies that two additional wavelet generations ( $n_{\text{coeffs}} \rightarrow 4 \times 192$ ) would reduce the fractional error near  $v \sim 200$  km/s down to 1%, while to reach a precision of  $10^{-3}$  would require about five new generations, i.e.  $n_{\text{coeffs}} \rightarrow 32 \times 192 = 6144$ . Integrating  $\langle g_{\ell m} | n \rangle$

for each coefficient would increase the calculation time by factors of 4 or 32, respectively. Wavelet extrapolation uses Eq. (3.22) to estimate all of these coefficients from the latter generations of the wavelet expansion, e.g.  $48 \leq n < 192$  for the cubic method. Relying as it does on simple linear algebra, the wavelet extrapolation is essentially instantaneous.

Figure 5 demonstrates the great improvement in accuracy made possible by the cubic wavelet extrapolation method. In these plots the local values of the  $g_{\ell m}^{(1,2,3)}$  derivatives are extracted from the  $n \leq n_{\text{coeffs}}$  wavelet coefficients, following the method of Section 3.2, and used to define interpolating functions  $\bar{g}_{\ell m}(v)$  within each wavelet's base of support. The  $n_{\text{coeffs}} = 6, 12$  interpolations are (unsurprisingly) rather bad, while the  $n_{\text{coeffs}} > 24$  versions are increasingly precise. The exact value from Eq. (D.15) is shown in red; it is barely distinguishable even from the  $n_{\text{coeffs}} = 24$  version, except at  $v = 0$  and a couple isolated points. For  $n \geq 48$  we must rely on the upper panel, showing the fractional error on a logarithmic scale, to identify the discrepancy between the function and its inverse wavelet transformation. The inset shows the linear-scale fractional error for just  $n = 96$  and  $n = 192$ . By  $n = 192$ , the relative error is on the order of  $10^{-4}$ , and decreasing by an order of magnitude with each new generation of coefficients. This is a substantial improvement from Figure 4: in that example, which did not use any extrapolation methods, the relative local precision at  $n = 192$  was only  $10^{-2}$ – $10^{-1}$ .

All of the  $n_{\text{coeffs}} = 192$  bins in the Figure 5 inset display cubic profiles, suggesting that the accuracy of the large  $n \gg n_{\text{coeffs}}$  limit can be further improved by calculating  $f^{(1,2,3)}$  directly, if possible. Indeed, this example, which is intended to demonstrate the wavelet expansion in a generic case, does not make use of the fact that the derivatives of  $g_{\ell m}(v)$  can be found exactly from Eq. (4.11), so its precision improves as  $8^{-\lambda^*}$  with each new generation, rather than the  $16^{-\lambda^*}$  scaling that might otherwise have been possible. Using exact values in Eq. (3.22), rather than the algebraically derived values from the wavelet interpolation, would increase the precision by an additional factor of  $2^\lambda$ .

Even better precision can be achieved through higher-order methods, e.g. the seventh-order Eq. (C.20), or by using marginally more sophisticated cubic methods (e.g. spline functions with continuous  $\bar{g}_{\ell m}$  interpolations). Section 5 discusses an alternative: for particularly fine precision, the wavelet expansion can be smoothly capped off by expanding the basis  $\{\phi\}$  to include a few orthogonal polynomials defined within each piecewise-constant interval of the inverse wavelet transformation. The order (linear, cubic, etc.) is controlled by the number of polynomials included in the series. This concentrates the information from the  $k$ th order extrapolation into  $k$  additional sets of basis functions, rather than some large number of Haar wavelets. The only challenge would be to evaluate  $\mathcal{I}^{(\ell)}$  for the new polynomial basis functions.

### 4.3 Local Accuracy (Momentum Form Factor)

As a final measure of convergence, we can check how well the wavelet-harmonic expansion matches the original function  $f(\mathbf{u})$ , for some collections of points  $\mathbf{u}$ . Local accuracy of the inverse wavelet transformation is a sufficient, though not necessary, condition for the accuracy of the scattering rate calculation. For example, accurate representations of  $g_\chi$  and  $f_S^2$  may require different values of  $\ell_{\text{max}}$ , and the angular diagonalization  $\mathcal{M} \rightarrow \mathcal{I}^{(\ell)}$  allows us to truncate the expansions at the smaller of the two  $\ell_{\text{max}}$ . Even so, it is still prudent to ensure local accuracy of  $|f_S^2\rangle$  and  $|g_\chi\rangle$ , so that the tabulated values can later be used in other settings (e.g. paired with functions with greater support at large  $\ell$ ).

A one-dimensional version of the local accuracy test was performed in the middle panel of Figure 3 for  $g_\chi(\mathbf{v})$ , for a ray  $\mathbf{v} = v\hat{v}_3$  passing through the center of one of the gaussian streams.

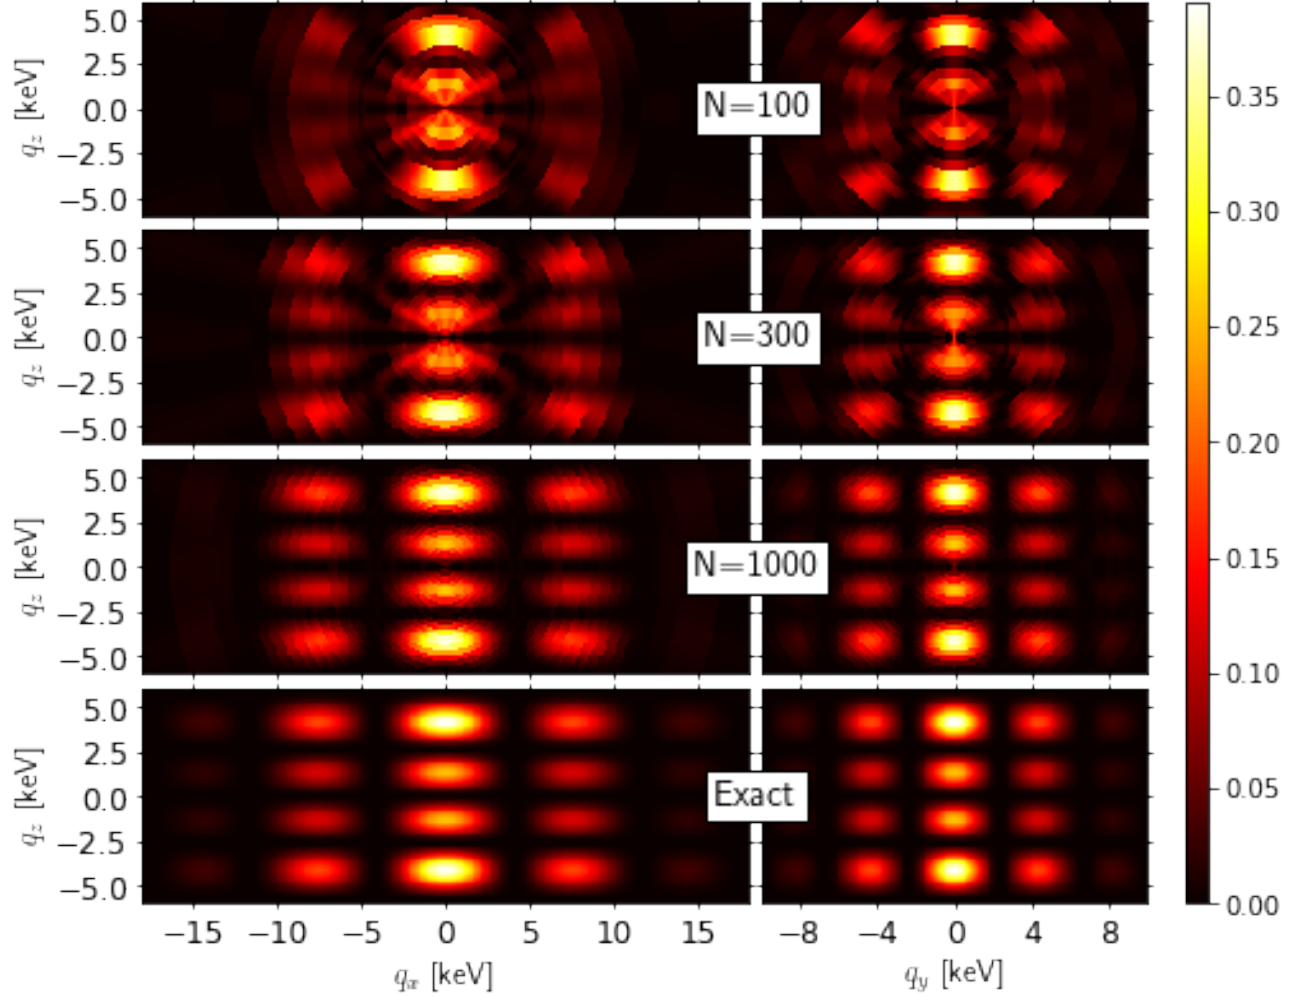


Figure 6: Comparing the momentum form factor  $f_s^2(\mathbf{q})$  (“Exact”) to its inverse wavelet-harmonic transformation  $\sum_{\varphi} \langle \varphi | f_s^2 | \varphi \rangle$  using the  $N$  most important coefficients, for  $N = 100, 300, 1000$ , evaluated on the  $q_y = 0$  and  $q_x = 0$  planes (left and right columns, respectively). Although  $N = 100$  correctly identifies the locations of the important features in  $f_s^2$ , resolving the shapes of each feature requires  $N = 300$  or  $N = 1000$ . With  $N = 1000$ , even the  $q_y \approx \pm 8$  keV fringes at  $q_x = 0$  come into focus. On the other hand, the weak  $q_x \approx \pm 15$  keV fringes would only be resolved with additional coefficients.

In this demonstration I switch to the particle-in-a-box form factor  $f_s^2(\mathbf{q})$  from Eq. (4.8), expanded in a wavelet basis cut off at  $q_{\max} = 10(\alpha m_e) \simeq 37.3 \text{ keV}$ . To build a partial picture of the full 3d function, I evaluate the inverse wavelet transformation on orthogonal 2d surfaces, aligned so as to include the origin and the global maxima of  $f_s^2(\mathbf{q})$ . Figure 6 tracks the convergence of the wavelet-harmonic expansion as  $\sum_{n\ell m} \langle n\ell m | f_s^2 \rangle |\varphi_{n\ell m}\rangle$  approaches the original  $f_s^2(\mathbf{q})$ , plotted here on the  $(q_x, q_z)$  and  $(q_y, q_z)$  planes. Due to the rectangular symmetries of the box,  $\langle f | n\ell m \rangle = 0$  for odd  $\ell$ , odd  $m$ , or  $m < 0$ .

After finding the coefficients for all  $n < 96$  and all even  $\ell \leq 36$ , Figure 6 shows the inverse wavelet-harmonic transform calculated from only the  $N = 100, 300, 1000$  largest  $n\ell m$  coefficients. With  $N = 100$ , the maxima at  $q_z = \pm 4.15 \text{ keV}$  are reproduced with the correct magnitude, but the  $q \approx 0$  region and the secondary peaks are poorly resolved. At  $N = 300$ , all of the secondary features away from the origin are resolved distinctly, but the innermost peaks retain a spurious conical shape. By  $N = 1000$  the accuracy is quite good. Each of the secondary peaks has the correct shape, and even the faint tertiary fringes at  $q_y \approx \pm 8 \text{ keV}$  ( $q_x = 0$ ) can be seen. The image is not perfect: the off-axis fringes still bear the spherical imprint of the discrete wavelets, especially in the left column, and the  $q_x \approx \pm 15 \text{ keV}$  ( $q_y = 0$ ) fringes do not appear. However, the important features are reproduced well enough that the wavelet extrapolation method of Section 3.2 would accurately smoothen the inner region.

**Angular Convergence:** Rather than repeating every aspect of the Section 4.1 analysis for the particle-in-a-box  $f_s^2(\mathbf{q})$ , Figure 7 summarizes the primary results. Thanks to the analytic form for  $f(\mathbf{q})$ , the distributional norm can be calculated directly from the integral  $\mathcal{E} = \int d^3q (f_s^2)^2$ . The result,  $\mathcal{E} \simeq 9.965 \times 10^{-2} (\alpha m_e)^3$ , can be used to quantify the global convergence of the wavelet-harmonic expansion.

From the original set of  $N_{\text{tot}} = 96 \cdot 19 \cdot 10 = 18240$  coefficients ( $0 \leq n \leq 95$ ;  $0 \leq \ell \leq 36$  for even  $\ell$ ;  $0 \leq m \leq \ell$  for even  $m$ ), Figure 7 shows two versions of the “missing distributional energy,”

$$\Delta\mathcal{E}(N) = \mathcal{E} - \sum_i^N q_0^3 \langle f_s^2 | \phi_i \rangle^2. \quad (4.17)$$

The left panel of Figure 7 organizes the  $\Delta\mathcal{E}$  based on the polar  $\mathcal{P}_\ell$  angular power,

$$\mathcal{P}_\ell \simeq \sum_{m=0}^{\ell} \sum_{n=0}^{95} q_0^3 \langle f_s^2 | n\ell m \rangle^2, \quad (4.18)$$

i.e.  $\mathcal{E} - \Delta\mathcal{E}(\ell) = \sum_{\ell'=0}^{\ell} \mathcal{P}_{\ell'}$ . The imprecision in Eq. (4.18) comes from terminating the radial mode expansion at  $95 \neq \infty$ . Examining the 2d angular power,  $\mathcal{P}_{\ell m}$ , one finds it to be concentrated at small  $\ell$ , with the largest four coefficients given by:

$$\mathcal{P}_{0,0} \simeq 0.274 \mathcal{E}, \quad \mathcal{P}_{2,0} \simeq 0.152 \mathcal{E}, \quad \mathcal{P}_{4,0} \simeq 0.114 \mathcal{E}, \quad \mathcal{P}_{2,2} \simeq 0.054 \mathcal{E}. \quad (4.19)$$

With the exception of  $\mathcal{P}_{12} > \mathcal{P}_{10}$ , the  $m$ -averaged angular power  $\mathcal{P}_\ell$  falls monotonically with increasing  $\ell$ .

In the center panel, Figure 7 shows the version of  $\Delta\mathcal{E}$  that corresponds most closely with the plots of Figure 6. The list of 18240 coefficients is sorted by decreasing size, and  $\Delta\mathcal{E}(N)$  is found by summing over  $\langle f_s^2 | \phi_i \rangle^2$  in that order. The qualitatively accurate  $N = 10^3$  expansion from Figure 6 is shown here to account for 99% of the distributional energy. Around  $N \sim 10^4$ , the cumulative



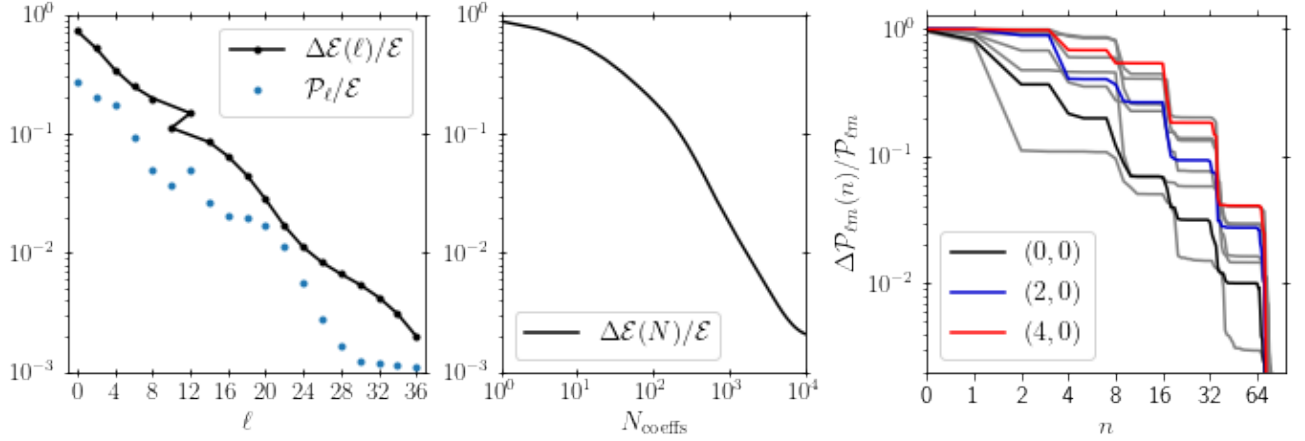


Figure 7: **Left:** the angular power  $\mathcal{P}_\ell$  is shown (in blue) for each  $\ell$ , in units of  $\mathcal{E}$ .  $\Delta\mathcal{E}(\ell)$ , shown in black, is defined as the difference between  $\mathcal{E}$  and the sum  $\sum_\ell \mathcal{P}_\ell$ . Here the  $\ell$  sum is ordered based on the size of  $\mathcal{P}_\ell$ , i.e. with  $\ell = 12$  included before  $\ell = 10$ . **Center:** An alternative version of  $\Delta\mathcal{E}(N)$ , summing over the  $N_{\text{coeffs}}$  largest values of  $\langle f_s^2 | n\ell m \rangle^2$ . Here the coefficients in the sum are ordered by decreasing magnitude. **Right:** The rate of convergence in  $n$  is shown for the 10 most important  $(\ell, m)$  angular modes, for the  $\Delta\mathcal{P}_{\ell m}(n)$  defined in Eq. (4.20), normalized by the total angular power  $\mathcal{P}_{\ell m} \simeq \sum_{n=0}^{95} \mathcal{P}_{n\ell m}$ . The  $(0, 0)$  mode, shown in black, has the largest  $\mathcal{P}_{\ell m}$ , and it also converges relatively quickly as a function of  $n$ .

$\mathcal{E}(N)$  reaches a plateau at about 99.8% of the  $\mathcal{E}$  found by direct integration. This indicates that many of the missing  $\ell = 38, 40 \dots$  terms are larger than than the 8240 least important  $\ell \leq 36$  terms. Indeed, the plateau in  $\mathcal{P}_\ell$  at  $\ell = 30 \dots 36$  (blue dots, left panel of Figure 7) suggests that to improve the precision beyond 0.1%, the harmonic expansion should first be extended to somewhat larger  $\ell$ .

**Radial Convergence:** The right panel of Figure 7 shows the rate of convergence in  $n$ , for several examples of  $(\ell, m)$ . This panel shows  $\Delta\mathcal{P}_{\ell m}(n)$ , defined as

$$\Delta\mathcal{P}_{\ell m}(n) \equiv \mathcal{P}_{\ell m} - \sum_{n'=0}^n q_0^3 \langle f_s^2 | n'\ell m \rangle^2. \quad (4.20)$$

In the plot,  $\Delta\mathcal{P}_{\ell m}(n)$  is normalized by the total  $\mathcal{P}_{\ell m} \approx \sum_{n=0}^{95} q_0^3 \langle f_s^2 | n\ell m \rangle^2$  independently for each  $(\ell, m)$ . The three angular modes with the largest power,  $(0, 0)$ ,  $(2, 0)$  and  $(4, 0)$ , are highlighted in black, blue and red, respectively. Of these three,  $\ell = 0$  converges most quickly, with 90% of the power coming from the wide  $n < 8$  bins, while the  $(4, 0)$  mode has somewhat more power around  $n \sim 8\text{--}16$ . The fastest-converging mode shown in the plot (the gray line with 90% of its power concentrated at  $n \leq 2$ ) is  $\ell = m = 4$ , for those who are curious.

Starting around  $n \sim 8$ , the  $\Delta\mathcal{P}_{\ell m}$  for each angular mode tend to decrease by factors of 3–5 with each new wavelet generation (i.e. each doubling of  $n$ ), for example around  $n \sim 16$  or  $n \sim 32$ . This behavior was anticipated by Eq. (3.37), which in the narrow-wavelet limit predicts a factor of 4 reduction of  $\Delta\mathcal{E}$  with each new generation.<sup>1</sup> As in the  $g_\chi$  example, this predictable scaling of

<sup>1</sup>Note that, because the value of  $\mathcal{P}_{\ell m}$  is extracted from the coefficients, this approximation sets  $\Delta\mathcal{P}_{\ell m}(95) \rightarrow 0$  by definition, so the estimate for  $\Delta\mathcal{P}_{\ell m}$  becomes unreliable after  $n = 64$ .

$\Delta P_{\ell m}$  indicates that the wavelet extrapolation method should be accurate around  $n \gtrsim 32$ . That said, considering the typically large uncertainties on  $g_\chi$ , there is currently little reason to calculate  $|f_S^2\rangle$  at sub-percent levels of precision, even if  $f_S^2(\mathbf{q}, E)$  is known so accurately. This point can and should be revisited once dark matter has been discovered.

## 4.4 Direct Detection Scattering Rate

As a final demonstration, the velocity distribution  $g_\chi$  from Eq. (4.3) and the momentum form factor  $f_s^2$  from Eq. (4.8) are combined in a mock direct detection analysis, for a list of DM models  $(m_\chi, F_{\text{DM}})$  including a light scalar mediator  $F_{\text{DM}} \propto 1/q^2$  and a spin-independent contact interaction,  $F_{\text{DM}} = 1$ . Two key questions are answered in this section: How fast does the scattering rate converge with  $\ell_{\text{max}}$ ? And how fast, in units of evaluations per second, is the wavelet-harmonic integration method? A third question (what is the maximal daily modulation amplitude?) is also answered, though as it applies only to the toy models of  $g_\chi$  and  $f_S^2$  the answer itself is not broadly relevant.

This analysis uses the partial rate matrix  $K^{(\ell)}$ , which is optimized for handling detector rotations, so the calculation proceeds in two parts. First, the matrices  $K^{(\ell)}(g_\chi, f_s^2, m_\chi, F_{\text{DM}})$  are assembled for each combination of models. Then, for each combination of models, the total scattering rate is calculated from Eq. (2.25) by summing over  $\text{Tr}(G^{(\ell)}(\mathcal{R})[K^{(\ell)}]^T)$  for  $\ell \leq \ell_{\text{max}}$ , for some list of rotations  $\mathcal{R} \in SO(3)$ .

For spin-independent DM scattering with  $g_\chi(\mathbf{v})$  given in the lab frame, the scattering matrix is diagonal in  $\ell$ : so, even though  $g_\chi(\mathbf{v})$  is maximally asymmetric, its pairing with a  $\mathbb{Z}_2 \times \mathbb{Z}_2 \times \mathbb{Z}_2$  detector material permits us to drop all terms with odd  $\ell$ . The rotation matrices  $G_{mm'}^{(\ell)}$ , on the other hand, generally include mixing between even and odd values of  $m, m'$ , so it would be incorrect to drop the negative and/or odd values of  $m$  from  $g_\chi$  when assembling  $K^{(\ell)}$ .

**Partial Scattering Rates:** It is very easy to evaluate the scattering rate  $R$ , once  $G^{(\ell)}$  and  $K^{(\ell)}$  have been calculated. A precursor result is the partial rate  $\tilde{R}^\ell$  from Eq. (2.25), i.e. the contribution to  $R$  coming specifically from spherical harmonics with polar index  $\ell$ . This is a helpful indicator of how quickly the spherical harmonic expansion is converging.

Figure 8 shows  $|R_\ell|/R$  for a list of 100 rotations  $\mathcal{R}$ . Although the total  $R$  and the angularly averaged rate  $R_{\ell=0}$  should be positive, the higher  $\ell$  modes can be negative. In this plot each line is colored based on the value of  $m_\chi$  for the 1, 10, and 100 MeV models. No distinction was made between the  $F_{\text{DM}} = 1$  and  $F_{\text{DM}} \propto 1/q^2$  form factors, simply because the bands of differing  $F_{\text{DM}}$  largely overlap.

Notice that for all of the  $\ell > 24$  modes,  $R_\ell < 10^{-4}R$  for all six DM models in the figure. This is good news: even though  $\ell_{\text{max}} \rightarrow 24$  might not be large enough to describe  $g_\chi$  and  $f_s^2$  individually at the desired precision, it turns out that  $\ell_{\text{max}} = 24$  is perfectly acceptable for the direct detection analysis. The convergence with respect to  $\ell_{\text{max}}$  is fastest for the lighter DM models,  $m_\chi = 1$  MeV.

**Daily Modulation:** The wavelet-harmonic method makes it very easy to scan over large numbers of detector orientations, e.g. to maximize or minimize the expected rate. For the  $g_\chi$  and  $f_s^2$  in this demonstration, a scan over  $N_{\mathcal{R}} = 10^3$  orientations finds the following maximum and minimum

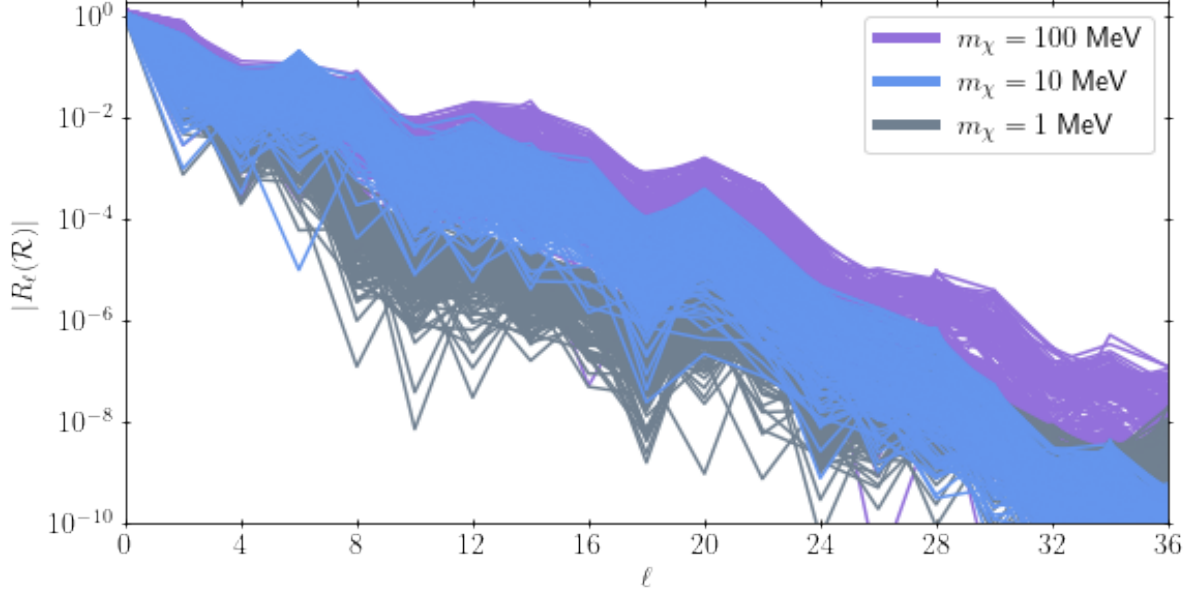


Figure 8: The partial rates  $R_\ell$  are shown for  $\ell = 0, 2, 4, \dots, 36$ , for an ensemble of  $N_{\mathcal{R}} = 10^2$  detector orientations. The three bands of color correspond to the  $m_\chi = 1, 10, 100$  MeV models, with  $F_{\text{DM}} = 1$  and  $F_{\text{DM}} \propto 1/q^2$  form factors shown together. Each line shows  $|R_\ell|/R$ , normalized by the total rate  $R(\mathcal{R})$  for that orientation. In the  $N_{\mathcal{R}} \rightarrow \infty$  limit, each of these bands would find  $R_\ell(\mathcal{R}) = 0$  points for each  $\ell > 0$ . Correspondingly, the typical width of each band in this plot encompasses a factor of  $10^2$ .

rates:

$$m_\chi = 1 \text{ MeV}, \quad F_{\text{DM}} = 1 : \quad 0.76 < R/\bar{R} < 1.13 \quad (4.21)$$

$$m_\chi = 10 \text{ MeV}, \quad F_{\text{DM}} = 1 : \quad 0.74 < R/\bar{R} < 1.28 \quad (4.22)$$

$$m_\chi = 100 \text{ MeV}, \quad F_{\text{DM}} = 1 : \quad 0.69 < R/\bar{R} < 1.70 \quad (4.23)$$

$$m_\chi = 1 \text{ MeV}, \quad F_{\text{DM}} \propto 1/q^2 : \quad 0.83 < R/\bar{R} < 1.17 \quad (4.24)$$

$$m_\chi = 10 \text{ MeV}, \quad F_{\text{DM}} \propto 1/q^2 : \quad 0.62 < R/\bar{R} < 1.55 \quad (4.25)$$

$$m_\chi = 100 \text{ MeV}, \quad F_{\text{DM}} \propto 1/q^2 : \quad 0.42 < R/\bar{R} < 1.99 \quad (4.26)$$

Here  $\bar{R}$  is the average rate for this ensemble of 1000 rotations. For a detector that is “fixed in place” in the lab, i.e. rotating with the Earth, a more detailed scan over  $N_{\mathcal{R}}$  could uncover which initial orientations of the detector crystal would produce the most statistically significant daily modulation signal. A scan over multiple  $g_\chi$  models would reveal how sensitive this modulation signal is to each of the four constituent gaussian functions.

Figure 8 shows that the 100 MeV models have the largest support at  $\ell = 2$  and  $\ell = 4$ , so one expects these models to have the largest daily modulation amplitudes. The 1 MeV model is barely above threshold, requiring at least  $v > 850$  km/s to excite the 4 eV transition, so its scattering rate is highly dependent on the vanishingly small tails of the velocity distribution (and therefore highly unreliable, in a realistic analysis). The 10 and 100 MeV models, on the other hand, are sensitive to a much larger part of  $g_\chi(\mathbf{v})$ , so their predictions for daily modulation are more robust.

In the presence of a constant, unmodeled, irreducible background, the  $\ell = 0$  contribution  $R^{(0)}$  provides no information about the dark matter candidates, except to provide upper limits on their

cross sections. The higher  $\ell$  modes, on the other hand, can be precisely measured: for example, by testing many different orientations of the detector within the lab and with respect to the DM wind. Any spurious signals originating within the lab, even ones modulating with the 24.0 hour day and/or correlated with the location of the Sun, can be averaged out by searching specifically for sidereal daily modulation (with a period of 23.93 hours). A positive result for sidereal modulation is evidence for a cosmogenic source; a positive result *in phase with the expected DM wind*, with a modulation amplitude that behaves as expected when the detector is rotated in the lab, is exceptionally strong evidence for dark matter. In the  $\ell$  expansion, the first measurements of  $R^{(\ell>0)}$  (in this case,  $\ell = 2$ ) would constrain the  $\rho_\chi \bar{\sigma}_0$  combination of cross section and overall density, given some assumptions about  $m_\chi$  and  $g_\chi$ .

Additional, detailed measurements of the higher  $\ell$  coefficients could be used to extract estimates of  $m_\chi$  and the form of  $F_{\text{DM}}$ , again given some assumptions about the velocity distribution (e.g. an ensemble of “likely”  $g_\chi(\mathbf{v})$  models). Once a detection is confirmed at multiple experiments, and the uncertainties on  $m_\chi$  and  $F_{\text{DM}}$  become narrower,  $g_\chi$  can be treated as the least-well-understood input to the rate calculation. At this stage the larger coefficients  $|g_\chi\rangle$  can be inferred directly from the data.

Plots in the style of Figure 8 indicate how much  $\ell, m$  data can be reasonably extracted from the signal. In the  $m_\chi = 10, 100$  MeV models,  $R^{\ell \leq 8} \sim 10\% R^{(0)}$ , for example, except for  $R^{(2)}$  which is  $\mathcal{O}(1)$ . An experiment that only barely discovers daily modulation (e.g. with a signal to noise ratio of  $\sim 3$ ) might not find any evidence for the  $\ell \geq 4$  modes. However, a modest improvement to the signal to noise ratio would make all  $\ell \leq 8$  accessible, permitting parallel determinations of  $m_\chi$  and  $F_{\text{DM}}$  from the angular data, or setting some constraints on the even  $\ell \leq 8$  coefficients of  $|g_\chi\rangle$ . If the DM mass turned out to be 1 MeV, on the other hand, the much faster convergence of  $R^{(\ell)}$  means that much more experimental effort is required to extract the  $\ell = 8$  information: in this example,  $R^{(8)}(1 \text{ MeV}) < 10^{-3} R^{(0)}$ , more than 100 times smaller than in the cases with heavier  $m_\chi$ . For this “inverse problem” of extracting  $|g_\chi\rangle$  from  $R(\mathcal{R})$ , fast angular convergence turns out to be quite unhelpful. It would be solved, in this case, by finding a material with much more support at  $\ell \sim 8$  for  $m_\chi \sim 1$  MeV.

## 4.5 Computation Time

As described in Eq. (1.19), a generic analysis may include  $N_{g_\chi}$  and  $N_{f_s}$  models of the DM velocity distribution and detector form factor;  $N_{\text{DM}}$  points in the  $(m_\chi, F_{\text{DM}})$  parameter space; and  $N_{\mathcal{R}}$  detector orientations,  $\mathcal{R} \in SO(3)$ . The matrices  $\mathcal{I}^{(\ell)}$  need to be evaluated for every DM particle model, while  $K^{(\ell)}$  is evaluated for every combination of  $g_\chi, f_s^2, m_\chi$  and  $F_{\text{DM}}$ . In total, the evaluation time for the complete analysis is

$$T_{\text{total}} = N_{g_\chi} N_{f_s} N_{\text{DM}} (N_{\mathcal{R}} \cdot T_{\text{eval.Tr}} + T_{\text{eval.K}}) + N_{\text{DM}} \cdot T_{\text{eval.I}} + N_{\mathcal{R}} \cdot T_{\text{eval.G}} + T_{\text{total}}^{\text{proj}}, \quad (4.27)$$

where each  $T_{\text{eval}}$  is the average time needed to evaluate  $\text{Tr}(G \cdot K^T)$ ,  $K$ ,  $\mathcal{I}$ , or  $G(\mathcal{R})$ , respectively, and where  $T_{\text{total}}^{\text{proj}}$  is the total time needed to evaluate all relevant  $|g_\chi\rangle$  and  $|f_s^2\rangle$  vectors that have not been provided. If none of the  $|g_\chi\rangle$  and  $|f_s^2\rangle$  coefficients are known, then

$$T_{\text{total}}^{\text{proj}} = N_{g_\chi} T_{\text{proj.V}} + N_{f_s} T_{\text{proj.Q}}, \quad (4.28)$$

where  $T_{\text{proj.V,Q}}$  are the average computation times for evaluating all relevant  $\langle g_\chi | n\ell m \rangle$  or  $\langle f_s^2 | n\ell m \rangle$  coefficients in a single example. The expression  $T_{\text{eval.I}}$  is for the case of continuum final states. In the case of  $N_j$  discrete final states, or the differential rate  $dR/dE$  evaluated at  $N_j$  points  $E_j$ ,

this can be expressed in terms of  $T_{\text{eval},I}$ , the average time needed to evaluate the simpler quantity  $I_*(E_j)$ :

$$T_{\text{eval},\mathcal{I}} = N_j T_{\text{eval},I} \quad (4.29)$$

Appendix E provides values of  $T_i$  for various values of  $\ell_{\text{max}}$  and different precision goals. Relatively little effort was put into optimizing the numeric implementation, so the evaluation times listed there should be taken as conservative upper bounds for the efficiency of the wavelet-harmonic integration method. Even in the precise version of the calculation (with  $\Delta\mathcal{E}/\mathcal{E} \lesssim 10^{-3}$ ), typical upper values for each  $T_i$  for  $\ell_{\text{max}} = 36$  are:

$$T_{\text{eval},\text{Tr}} \lesssim 3 \times 10^{-4} \text{ s}, \quad T_{\text{eval},K} \lesssim 1 \text{ s}, \quad T_{\text{eval},G} \lesssim 0.5 \text{ s}, \quad T_{\text{eval},I} \lesssim 10^3 \text{ s}. \quad (4.30)$$

For  $\ell_{\text{max}} = 24$ ,

$$T_{\text{eval},\text{Tr}} \lesssim 7 \times 10^{-5} \text{ s}, \quad T_{\text{eval},K} \lesssim 0.1 \text{ s}, \quad T_{\text{eval},G} \lesssim 0.15 \text{ s}, \quad T_{\text{eval},I} \lesssim 300 \text{ s}, \quad (4.31)$$

with part of the reduction in  $T_{\text{eval},I}$  coming from trimming the remaining list of  $n_v$  and  $n_q$  coefficients to exclude the ones that are irrelevantly small. Only a small subset of the analysis needs to be performed with  $\ell_{\text{max}} = 36$ : once the equivalent of Figure 8 has been generated for a coarse list of  $m_\chi$  values, for example, it becomes clear that  $\ell_{\text{max}} = 24$  is more than sufficient for evaluating  $R(\mathcal{R})$  at the 0.1% level of precision.

Consider a hypothetical hybrid daily/annual modulation analysis with 200 different  $g_\chi$  profiles, one form factor  $f_s^2$ , and  $10^4$  detector orientations, tested for 50 points in  $(m_\chi, F_{\text{DM}})$  parameter space. Given pre-tabulated  $|g_\chi\rangle$  and  $|f_s^2\rangle$  vectors, the analysis can be completed in about

$$T_{\text{total}}(\ell_{\text{max}} = 36) \sim 25 \text{ hours}, \quad T_{\text{total}}(\ell_{\text{max}} = 24) \lesssim 7 \text{ hours}, \quad (4.32)$$

based on the Eq. (4.30) values for  $T_i$ . This is assuming no attempt is made to parallelize this extremely parallelizable calculation, even though it would be very easy. In both examples, slightly more than half of  $T_{\text{total}}$  comes from evaluating  $\mathcal{I}^{(\ell)}$ . Beyond  $N_{\mathcal{R}} > 2 \times 10^4$  the  $T_{\text{eval},\text{Tr}}$  term surpasses  $T_{\text{eval},I}$ .

Compare this analysis to the alternative: evaluating the five-dimensional integral of Eq. (1.5) for each of the  $10^8$  configurations (after using the  $\delta$  function to reduce the dimensionality of the original 6d integrand by one). In this example, the direct integration approach would take

$$T_{\text{total}}^{\text{slow}} = N_{g_\chi} N_{f_s} N_{\text{DM}} N_{\mathcal{R}} \cdot T_{\text{eval},\text{int}}, \quad (4.33)$$

where  $T_{\text{eval},\text{int}}$  is the time needed to integrate Eq. (1.5) once. Even for this relatively simple example with analytic functions for  $g_\chi$  and  $f_s^2$ , Appendix E finds  $T_{\text{eval},\text{int}} \sim 600 \text{ s}$  when using comparable levels of precision to the  $\ell_{\text{max}} = 24$  wavelet analysis. For the  $10^8$  point analysis,

$$T_{\text{total}}^{\text{slow}} \sim 1900 \text{ cpu-years}, \quad (4.34)$$

larger by a factor of about

$$T_{\text{total}}^{\text{slow}}/T_{\text{total}}^{\text{wavelet}} \sim 2.4 \text{ million}, \quad (4.35)$$

compared to the  $\ell_{\text{max}} = 24$  wavelet-harmonic analysis. In the limit of  $N_{\mathcal{R}} \gg 10^5$ , this ratio asymptotes to  $T_{\text{eval},\text{int}}/T_{\text{eval},\text{Tr}} \sim 10^7$ . Note that for less simple detector models, where Eq. (1.5) depends on a tabulated array of  $f_s^2(\mathbf{q})$ , the ratio may be even larger.

## 5 Discussion

Section 2–4 present the wavelet-harmonic integration method in enough detail to calculate a direct detection scattering rate, with full control over the precision of the harmonic expansion. Comparing Eq. (4.32) with Eq. (4.35), it is clear that the old approach (integrating Eq. (1.1)) should be abandoned for any analysis that involves more than a few detector orientations.

Looking to the future, there are several aspects of the wavelet-harmonic method that call for further study. First, and most importantly, the method can be generalized to any problem involving integrands which depend linearly on multiple input functions. Section 5.1 provides this general version of the vector space integration method, followed in Section 5.2 by a specific application to the detector form factor calculation.

Section 5.3 describes another topic for future work: transformations between different bases,  $\langle\phi'|\phi\rangle$ . A transformation of this type was used for  $g_\chi$  in Section 4, and it reduced the integration time for evaluating  $|g_\chi\rangle$  by several orders of magnitude. Annual modulation analyses are another obvious target for basis-related simplification. Section 5.4 comments briefly on how to ensure that  $|g_\chi\rangle$  and  $|f_s^2\rangle$  remain explicitly positive, and Section 5.5 describes how sets of continuous basis functions can be added to the wavelet expansion to achieve exponential improvement in the precision.

### 5.1 Generalization

As pointed out in Ref. [1], the vector space integration method works because the rate integrand depends linearly on the inputs  $g_\chi$  and  $f_s^2$ . Any integral of this type can be completed this way. For a generic functional  $S$  depending on  $k$  input functions  $f_i$  and some set of parameters  $\vartheta = \{\vartheta_j\}$ ,

$$S(\{f_i\}, \vartheta) \equiv \int d\Pi f_1(\mathbf{x}_1) f_2(\mathbf{x}_2) \dots f_k(\mathbf{x}_k) \cdot \hat{\mathcal{O}}_S(\mathbf{x}_1, \mathbf{x}_2, \dots, \mathbf{x}_k; \vartheta), \quad (5.1)$$

the integral is factorized by projecting each  $f_i$  onto basis functions  $\phi^{(i)}$ :

$$S(\{f_i\}, \vartheta) = \sum_{\phi^{(1)}} \sum_{\phi^{(2)}} \dots \sum_{\phi^{(k)}} \langle\phi^{(1)}|f_1\rangle \langle\phi^{(2)}|f_2\rangle \dots \langle\phi^{(k)}|f_k\rangle \cdot \langle\hat{\mathcal{O}}_S(\vartheta)|\phi^{(1)} \dots \phi^{(k)}\rangle, \quad (5.2)$$

$$\langle\hat{\mathcal{O}}_S(\vartheta)|\phi^{(1)} \dots \phi^{(k)}\rangle \equiv \int d\Pi \phi^{(1)} \phi^{(2)} \dots \phi^{(k)} \hat{\mathcal{O}}_S(\vartheta), \quad (5.3)$$

Here  $d\Pi$  represents integration over the phase space for  $\mathbf{x}_{1\dots k}$ , and the vectors  $\mathbf{x}_i$  can be of any dimension. If the linear operator  $\hat{\mathcal{O}}_S$  has any symmetries, then a good basis choice can block-diagonalize the rank- $k$  tensor  $\hat{\mathcal{O}}_S(\vartheta)$ .

If  $S(\{f_i\}, \vartheta)$  must be evaluated for many different versions of the functions  $f_i$ , or for a large number of parameter choices  $\vartheta$ , then the factorization inherent to Eq. (5.2) can greatly simplify the evaluation of  $S$ . This is especially true if the basis functions  $\phi^{(i)}$  permit Eq. (5.3) to be integrated analytically.

Some classes of problems require not just  $S$ , but also its derivatives: either with respect to the parameters, i.e.  $\partial S/\partial\vartheta_j$ , or functional derivatives,  $\delta S/\delta f_i$ . In multivariate statistical inference, for example, a measurement of  $S$  provides best-fit points in the  $\{f_i\}, \vartheta$  spaces, with confidence intervals given by derivatives of the likelihood function with respect to the parameters. Mixed partial derivatives, e.g.  $\partial^2 S/\partial\vartheta_i\partial\vartheta_j$  or  $\partial^2 S/\partial f_i\partial\vartheta_j$ , indicate the correlations between the inputs to  $S$ .

Derivatives with respect to  $\delta f_i$  can be extracted from the  $\hat{O}_S$  tensor directly, simply by dropping the  $f_i$  related sum in Eq. (5.2). That is,

$$\frac{df}{d\langle\phi_n^{(i)}|f_i\rangle} = \langle f_1 f_2 \dots f_{i-1} | \phi_n^{(i)} \hat{O}_S(\vartheta) | f_{i+1} \dots f_k \rangle, \quad (5.4)$$

where the index  $n$  indicates a derivative with respect to the  $n$ th basis function of type  $\phi^{(i)}$ . Derivatives of the form  $\partial\hat{O}_S/\partial\vartheta_j$  are given by

$$\frac{\partial}{\partial\vartheta_j} \langle \hat{O}_S(\vartheta) | \phi^{(1)} \dots \phi^{(k)} \rangle \equiv \int d\Pi \phi^{(1)} \phi^{(2)} \dots \phi^{(k)} \frac{\partial\hat{O}_S(\vartheta)}{\partial\vartheta_j}. \quad (5.5)$$

In some cases this may even be analytically tractable. Otherwise, it can be evaluated numerically, either from Eq. (5.5) or by using finite-difference methods on  $\mathcal{O}(\vartheta + d\vartheta)$ . Drawing the connection to the DM direct detection example, it is straightforward to calculate  $\partial\mathcal{I}^{(\ell)}/\partial m_\chi$ , and therefore  $\partial R/\partial m_\chi$ , given the analytic form for  $I_\star(E)$  derived in Appendix B. The mild tedium involved is still much preferable to the high-dimensional finite-difference methods that would otherwise be required, e.g. in a global analysis of  $(m_\chi, F_{\text{DM}}, g_\chi)$  models.

**Hyperspherical Wavelet-Harmonic Basis:** If the operator  $\mathcal{O}$  transforms in some simple way under rotational symmetries of the arbitrary-dimensional coordinates  $\mathbf{x}_i$ , then a generalized hyperspherical wavelet-harmonic basis may provide an optimal basis. For some orthogonal hyperspherical harmonics  $\mathcal{Y}$  defined on the  $S^{p-1}$  sphere, a  $p$  dimensional spherical wavelet-harmonic basis function defined on  $|\mathbf{u}| \leq u_{\text{max}}$  is given by

$$\phi(\mathbf{u}) \equiv h_{\lambda\mu}^{(p)}(u/u_{\text{max}}) \mathcal{Y}_{\{\ell\}}(\hat{u}), \quad (5.6)$$

where  $\{\ell\}$  represents the  $p-1$  angular indices, and where  $h_{\lambda\mu}^{(p)}$  is normalized such that

$$\int_0^1 x^{p-1} dx h_n^{(p)}(x) h_{n'}^{(p)}(x) = \delta_{nn'}. \quad (5.7)$$

Here I use the same  $(\lambda\mu) \rightarrow n$  integer mapping from Eq. (3.9). For an explicit form of  $\mathcal{Y}_{j\ell m}(\hat{x})$  in four dimensions, see the  $Z_{j\ell}^m$  of Ref. [70], or related results in nuclear physics (e.g. [71]). Just as in Eq. (3.5), the generalized radial functions are given by:

$$h_{\lambda\mu}^{(p)}(x) = \begin{cases} +A_{\lambda\mu}^{(p)} & 2^{-\lambda}\mu \leq x < 2^{-\lambda}(\mu + \frac{1}{2}), \\ -B_{\lambda\mu}^{(p)} & 2^{-\lambda}(\mu + \frac{1}{2}) < x \leq 2^{-\lambda}(\mu + 1), \\ 0 & \text{otherwise,} \end{cases} \quad (5.8)$$

where

$$x_1 = 2^{-\lambda}\mu, \quad x_2 = 2^{-\lambda}(\mu + \frac{1}{2}), \quad x_3 = 2^{-\lambda}(\mu + 1), \quad (5.9)$$

and

$$A_{\lambda\mu}^{(p)} = \sqrt{\frac{p}{x_3^p - x_1^p} \frac{x_3^p - x_2^p}{x_2^p - x_1^p}}, \quad B_{\lambda\mu}^{(p)} = \sqrt{\frac{p}{x_3^p - x_1^p} \frac{x_2^p - x_1^p}{x_3^p - x_2^p}}. \quad (5.10)$$

The constant  $n=0$  wavelet takes the value

$$h_{n=0}^{(p)}(x) = \sqrt{p}. \quad (5.11)$$

## 5.2 Application to Momentum Form Factor

The momentum form factor  $f_s^2$  is a perfect example of another difficult problem that can be simplified with wavelet-harmonic integration. It depends linearly on initial and final state wavefunctions for the SM particle; and its  $\hat{O}(\mathbf{q})$  is a simple momentum transfer operator. Taking the Eq. (1.6) expression, with position space wavefunctions  $\Psi_i$ ,

$$f_s(\mathbf{q}) = \langle \Psi_s(\mathbf{r}) | e^{i\mathbf{q}\cdot\mathbf{r}} | \Psi_0(\mathbf{r}) \rangle, \quad (5.12)$$

and expanding the wavefunctions  $\Psi$  in a basis with (complex) spherical harmonics,

$$f_s(\mathbf{q}) = \sum_{n\ell m} \sum_{n'\ell'm'} \langle \Psi_s | n'\ell'm' \rangle \langle n\ell m | \Psi_0 \rangle \sum_{\lambda\mu} (2\lambda + 1) i^\lambda Y_\lambda^\mu(\hat{q}) \cdot \langle n'\ell'm' | Y_\lambda^\mu(\hat{r}) j_\lambda(qr) | n\ell m \rangle. \quad (5.13)$$

Notice that  $Y_\lambda^\mu(\hat{q})$  simply factors out of the  $d^3\mathbf{r}$  integral. This is extremely helpful, if the eventual goal is to project  $f_s^2(\mathbf{q})$  onto a similar basis of spherical harmonic  $\varphi$  functions.

The angular integrals  $\langle \ell'm' | Y_\lambda^\mu(\hat{r}) | \ell m \rangle$  are given by the Wigner  $3j$  symbols,

$$\int d\Omega Y_{\ell'}^{m'*} Y_\lambda^\mu Y_\ell^m = (-1)^{m'} \sqrt{\frac{(2\ell' + 1)(2\lambda + 1)(2\ell + 1)}{4\pi}} \begin{pmatrix} \ell' & \lambda & \ell \\ 0 & 0 & 0 \end{pmatrix} \begin{pmatrix} \ell' & \lambda & \ell \\ -m' & \mu & m \end{pmatrix}. \quad (5.14)$$

The  $3j$  symbols have certain selection rules, which enforce  $-m' + \mu + m = 0$  and set  $(\ell' + \lambda + \ell)$  to be even. Calling the right side of Eq. (5.14)  $c_{\ell'\lambda\ell}^{m'\mu m}$  for conciseness, the form factor is:

$$f_s(\mathbf{q}) = \sum_{\lambda\mu} (2\lambda + 1) i^\lambda \sum_{n\ell m} \sum_{n'\ell'm'} c_{\ell'\lambda\ell}^{m'\mu m} \langle \Psi_s | n'\ell'm' \rangle \langle n\ell m | \Psi_0 \rangle Y_\lambda^\mu(\hat{q}) \cdot \langle n' | j_\lambda(qr) | n \rangle. \quad (5.15)$$

The last term with  $j_\lambda$  as an operator is a function of  $q$ , analogous to the  $\mathcal{I}^{(\ell)}$  integrand. For radial basis functions  $|n\ell m\rangle = Y_\ell^m(\hat{r}) w_n(r)$ , this function of  $q$  is given by

$$\langle n' | j_\lambda(qr) | n \rangle = \int r^2 dr w_{n'}(r) j_\lambda(qr) w_n(r). \quad (5.16)$$

If the basis functions  $w_n$  are simple enough (e.g. piecewise-constant), this integral can be completed analytically. So, the problem of calculating  $f_s(\mathbf{q})$  has been replaced with the simpler problem of projecting the wavefunctions  $\Psi_i$  onto the  $|n\ell m\rangle$  basis functions.

In many contexts an analytic form for  $\Psi_i$  may be known, at least approximately, even when no such result is available for  $f_s(\mathbf{q})$ . This is the case for the organic chemistry examples of Refs [24,36], where the molecular wavefunctions are approximated as linear combinations of  $2p_z$  atomic orbitals.

Projecting  $f_s$  onto a  $|\varphi\rangle = |n\ell m\rangle$  basis is now fairly easy. The  $|\ell m\rangle$  selection is trivial, for example. For the  $|n\rangle$  part, one simply adds some  $f_s$  radial momentum basis functions  $\tilde{r}_\nu(q)$  to the integral of Eq. (5.16):

$$\langle \nu\lambda\mu | f_s \rangle = (2\lambda + 1) i^\lambda \sum_{n\ell m} \sum_{n'\ell'm'} c_{\ell'\lambda\ell}^{m'\mu m} \langle \Psi_s | n'\ell'm' \rangle \langle n\ell m | \Psi_0 \rangle \mathcal{J}_{\nu n' n}^{(\lambda)}, \quad (5.17)$$

$$\mathcal{J}_{\nu n' n}^{(\lambda)} \equiv \langle \nu n' | j_\lambda(qr) | n \rangle = \int q^2 dq r^2 dr \tilde{r}_\nu(q) w_{n'}(r) j_\lambda(qr) w_n(r). \quad (5.18)$$

Just like the kinematic scattering matrix  $\mathcal{I}^{(\ell)}$ ,  $\mathcal{J}^{(\lambda)}$  can be evaluated analytically for simple position-space  $w_n$  functions.



Finally, to get  $\langle \varphi | f_S^2 \rangle$  from  $\langle \varphi | f_s \rangle$ , one needs to apply the algebraic properties of the basis functions, i.e. the coefficients  $c_{ij}^k$  in

$$|\phi_i\rangle |\phi_j\rangle = \sum_k c_{ij}^k |\phi_k\rangle. \quad (5.19)$$

This is straightforward for spherical harmonics, and for wavelets it is rather easy: if  $r_i$  and  $r_j$  do not overlap, then  $c_{ij}^k = 0$ . If  $i \neq j$  overlap, then  $c_{ij}^k \propto \delta_{ik}$  or  $\delta_{jk}$ , for whichever of  $i, j$  has the smaller base of support. If  $i = j$ , then  $|\phi_i\rangle^2$  includes a sum over all of the  $k \leq i$  wavelets with bases of support that overlap with  $r_i$ .

### 5.3 Basis Transformations

Most of the results of this paper follow from representing  $|g_\chi\rangle$  and  $|f_S^2\rangle$  as vectors in the Hilbert spaces spanned by one set of  $\{\phi\}$  and one set of  $\{\varphi\}$  basis functions. In the language of Eq. (5.1), the Choices 1–3 made in Section 2.3 were designed to optimize the evaluation of the tensor  $\phi^{(1)} \dots \phi^{(k)} \hat{O}_k$  — possibly at the expense of evaluating  $\langle \phi^{(i)} | f_i \rangle$  in a less-than-optimal basis.

A more complete description of transformations from one basis to another would be highly useful. Suppose a function  $f$  is well described by basis functions  $\psi$ . The transformation from the  $\{\psi\}$  basis to a  $\{\phi\}$  basis is given by:

$$|f\rangle = \sum_\psi \langle \phi | \psi \rangle \langle \psi | f \rangle |\phi\rangle \quad (5.20)$$

where  $\langle \phi | \psi \rangle$  are the coefficients of a basis transformation matrix,  $\mathcal{B}_\psi^\phi$ , acting on the  $|\psi\rangle$  functions. This way,  $|f\rangle$  and  $\hat{O}$  can be represented using different, independently optimal basis functions.

For example, the rectangular box of the  $f_S^2(\mathbf{q})$  model in Section 4 might lend itself more naturally to a description in Cartesian coordinates (e.g. Eq. (4.8)). That is, the  $|f\rangle = \langle \psi | f \rangle |\psi\rangle$  series could in principle converge more quickly with oscillatory Cartesian basis functions, rather than wavelet-harmonics. If the coefficients  $\mathcal{B}_{\psi_i}^\phi = \langle n\ell m | \psi_i \rangle$  can be calculated analytically, then it may be faster to find  $\langle \phi | f \rangle$  from Eq. (5.20) rather than calculating the inner product with  $\phi$  directly.

There are two especially promising applications: families of functions  $f_i$  related to each other by simple operations; and cases where  $f$  is already provided as a sum of other functions, e.g. as an analytic model, or as a result of the numeric method used to calculate  $f$ . Both scenarios arise for  $g_\chi$  and  $f_S^2$  in direct detection.

**Annual Modulation:** Choice 2, to use lab-frame velocity distributions  $g_\chi$ , simplifies the scattering operator in Eq. (2.10) by making it spherically symmetric for spin-independent scattering, permitting the  $\mathcal{M}_{n\ell m}^{jn'\ell'm'} \propto \delta_l^l \delta_m^{m'}$  block diagonalization in Eq. (2.17). However, the lab-frame velocity distribution is time-dependent, thanks to the Earth’s revolution around the Sun: so, any analysis sensitive to annual modulation must evaluate  $|g_\chi(t)\rangle$  repeatedly over the course of the year.

It would be more appealing to define  $|g_\chi\rangle$  once, in the rest frame of the galaxy or of the Sun, and to use a time-dependent basis transformation to extract the lab-frame coefficients. The partial rate matrix from Eq. (2.23) would given by:

$$K_{mm'}^{(\ell)}(g_\chi(t), f_S^2) \equiv \sum_{n=0}^{\infty} \sum_{j,n'=0}^{\infty} \sum_{\psi} \langle v_0^3 g_\chi | \psi \rangle \cdot \langle \psi(t) | n\ell m \rangle \cdot \mathcal{I}_{n,jn'}^{(\ell)} \cdot \langle jn'\ell m' | E_0 f_S^2 \rangle, \quad (5.21)$$

where  $\mathcal{B}_\psi^\phi(t) \equiv \langle \psi(t) | n\ell m \rangle$  is a time-dependent boost matrix that corrects for the changing Earth velocity. This is completely analogous to the utility of defining  $G^{(\ell)}(\mathcal{R})$  for another continuously-variable parameter  $\mathcal{R} \in SO(3)$ , in the context of detector rotations. If  $\mathcal{B}_\psi^\phi(t)$  can be expressed as an analytic function of  $\mathbf{v}_E(t)$ , then the vector space integration method allows the rate  $R(t)$  to be evaluated on a continuum of times  $t$ . Alternatively, if the lists of coefficients  $N_\psi$  and  $N_\phi$  are not too large,  $\mathcal{B}_\psi^\phi(t)$  could be evaluated (numerically, if necessary) for some grid of values  $t_i$ , and tabulated for future reference.

**Gaussian Basis Functions:** As an example of the latter type of application, there are several contexts where it makes sense to use a basis of gaussian functions for  $\{\psi\}$ . It is a common way to model DM streams, as in the Section 4 demonstration. In physical chemistry systems too complicated for the LCAO model [25], the initial and final state wavefunctions for  $f_s(\mathbf{q})$  may be calculated numerically using a basis of gaussian functions. There are also simple systems (e.g. harmonic oscillators) which have gaussian wavefunction profiles (e.g.  $\Phi \sim H_n(x)e^{-x^2}$  for some Hermite polynomials  $H_n$ ).

Each of these cases can be simplified using the  $\langle \phi | \psi \rangle$  transformation matrices for gaussian functions  $\psi$ . Defining a unit-normalized 3d gaussian centered at  $\mathbf{u}_i$  with width  $\sigma_i$ ,

$$g_i(\mathbf{u}, \mathbf{u}_i, \sigma_i) = \frac{e^{-|\mathbf{u}-\mathbf{u}_i|^2/2\sigma_i^2}}{\sigma_i^3 (2\pi)^{3/2}}, \quad \int d^3u g_i(\mathbf{u}, \mathbf{u}_i, \sigma_i) \equiv 1, \quad (5.22)$$

the exponential of the dot product  $\mathbf{u} \cdot \mathbf{u}_i$  can be expanded in spherical harmonics, making the angular integrals trivially easy. The remaining radial integral takes the form:

$$g_i = \frac{4\pi}{(2\pi)^{3/2}\sigma_i^3} \exp\left(-\frac{u^2 + u_i^2}{2\sigma_i^2}\right) \sum_{\ell=0}^{\infty} \sum_{m=-\ell}^{\ell} i_\ell^{(1)}\left(\frac{u_i u}{\sigma_i}\right) Y_{\ell m}(\hat{u}) Y_{\ell m}(\hat{u}_i), \quad (5.23)$$

$$\langle g_i(\mathbf{u}_i, \sigma_i) | n\ell m \rangle = \sqrt{\frac{2}{\pi}} \frac{Y_{\ell m}(\hat{u}_i)}{u_0^3} \int_0^\infty \frac{u^2 du}{\sigma_i^3} r_n^{(\ell)}(u) e^{-(u^2 + u_i^2)/2\sigma_i^2} i_\ell^{(1)}\left(\frac{u_i u}{\sigma_i}\right), \quad (5.24)$$

where  $i_\ell^{(1)}$  is the spherical modified Bessel function of the first kind, and where  $r_n^{(\ell)}$  is the radial basis function for  $|\phi\rangle = |n\ell m\rangle$ . The derivation and further details are in Appendix D.

For a function  $f = \sum_i c_i g_i$  that is a sum of gaussians, the coefficients  $\langle n\ell m | f \rangle$  are given by a sum of 1d radial integrals of the form Eq. (5.24). As with  $\mathcal{I}^{(\ell)}$ , a suitably simple choice of  $r_n(u)$  permits Eq. (5.24) to be integrated analytically, bypassing numeric integration entirely. This makes it much easier to perform scans over the parameters of the as-yet-undetected DM streams, for example.

**Other Basis Transformations:** Finally, the  $\langle \psi | \phi \rangle$  matrices can assist with more mundane tasks, e.g. rescaling the basis parameters. Section 4 uses a basis with  $q_{\max} = 10\alpha m_e \simeq 37.3$  keV, and  $v_{\max} = 960$  km/s. These values are arbitrary, as long as they are large enough to encompass all or nearly all of  $g_\chi$  and  $f_S^2$ . A different detector material might require  $q_{\max} \rightarrow 50$  keV, however, in which case a different set of  $|\varphi\rangle$  must be used. Rather than repeating all of the  $\langle \varphi' | f_S^2 \rangle$  calculations in a new basis (or using an overly large  $q_{\max} \rightarrow 2q_{\max}$ ), it may be easier to evaluate  $\langle \varphi' | \varphi \rangle$  once and to apply it, as needed, to the previously-calculated  $f_S^2$  models, especially if the rescaling must be applied to large numbers of tabulated  $|f_S^2\rangle$ .

To take another example, one version of  $f_S^2$  might be precisely modeled using the  $k$ th order polynomial method suggested in Section 5.5, using  $n_{\text{coeffs}} = 32$  radial modes. A different material with more intricate structure might require  $n_{\text{coeffs}} = 128$  instead. A relatively simple basis transformation converts the  $n_{\text{coeffs}} = 32$  result into the finer resolution version.

One of the great promises of the vector space integration method is the ability to build up catalogs of  $|g_\chi\rangle$  and  $|f_S^2\rangle$  functions. Consistency is a key requirement for this project. Fast basis transformations make it easy to compare results generated from different basis choices.

## 5.4 Squares, Roots, and Positivity

The functions  $g_\chi$  and  $f_S^2$  are explicitly positive. The basis functions  $\phi$  and  $\varphi$  are not: so, it is possible that an inverse wavelet-harmonic transformation (with finitely many terms) can yield negative values, by underestimating the original function in regions where it is close to zero. When it is important to forbid negative values in  $|g_\chi\rangle$  and  $|f_S^2\rangle$ , it may be better to expand the functions  $\sqrt{g_\chi}$  and  $f_S$  instead, and to obtain  $g_\chi$  and  $f_S^2$  from  $|\sqrt{g_\chi}\rangle^2$  and  $|f_S\rangle^* |f_S\rangle$ . This way, every finite inverse wavelet transformation will be manifestly nonnegative. Evaluating the squares of  $|\sqrt{g_\chi}\rangle$  and  $|f_S\rangle$  is simple, once the coefficients  $c_{ij}^k$  from Eq. (5.19) are known.

The usefulness of  $\mathcal{E} \sim \langle f|\phi\rangle^2$  for tracking the convergence of the basis function expansion provides another motivation for evaluating  $|\sqrt{g_\chi}\rangle$  instead. With this approach,  $\mathcal{E}$  corresponds to a physical quantity,

$$\mathcal{E}_v = \int d^3v (\sqrt{g_\chi})^2 \equiv 1. \quad (5.25)$$

Similarly, even though  $f_s^2(\mathbf{q})$  is not specifically  $L^1$  normalized, the value of

$$\mathcal{E}_q = \int d^3q |f_s(\mathbf{q})|^2 \quad (5.26)$$

is still more closely related to the physical quantity that we are trying to fit. These functions, not  $g_\chi^2$  or  $f_s^4$ , are what appear in the rate integrand.

Rotations can also be handled in this explicitly positive way by applying the Wigner  $G^{(\ell)}$  matrix (or the original  $D^{(\ell)}$ , for complex-valued  $f_s$ ) before squaring, noting that  $\mathcal{R} \cdot |f_S^2\rangle = |\mathcal{R} \cdot f_S\rangle^2$ . The cost is that the vectorized scattering rate no longer factorizes into  $G^{(\ell)}$  and the partial rate matrix  $K^{(\ell)}$  of Eq. (2.23), when the rotations are applied this way. So, unless avoiding negative values is absolutely mandatory, it is simpler to pursue positivity through accuracy, keeping enough terms in the expansion so that the inverse wavelet-harmonic transformation is positive even when the function is small. Figure 4 with  $n_{\text{coeffs}} > 24$  provides such an example.

## 5.5 Polynomial Cap for the Wavelet Expansion

Section 3.2 describes in detail how the information from a small number of somewhat-narrow wavelets ( $\lambda \gg 1$ ) can be used to fill in the values of a much larger number of wavelet coefficients ( $n_{\text{coeffs}}^k$ ). This is quite useful: but, if a large number of coefficients can be evaluated with a small amount of information, it implies that there should be some other basis that organizes that information more compactly. As the form of Eq. (3.14) makes clear, there is such a basis: a set of  $k$  orthogonal polynomials would contain all of the information of the  $k$ th order wavelet extrapolation within each interval.

For the  $n$ th piecewise-constant bin from the wavelet transformation with  $n_{\text{coeffs}}$  coefficients, one can define new orthogonal basis functions  $|n, p\rangle$  of polynomial order  $p = 1, 2, \dots, k$ . This basis is mutually orthogonal, as long as no higher-generation wavelets (e.g.  $2n, 2n + 1, 4n$ , etc.) are included. This hybrid form is much better suited to generating interpolating functions: instead of adding together all  $\mathcal{O}(n_{\text{coeffs}}^k)$  coefficients from the wavelet extrapolation, only  $k \cdot n_{\text{coeffs}}$  terms are required in the hybrid wavelet–polynomial method. Whether or not it is practical for the rate calculation depends on how long it takes to integrate Eq. (B.3) with the new basis functions.

On the subject of hybrid wavelet basis functions, there may be situations in which cutting off  $g_\chi$  and  $f_S^2$  at  $v_{\text{max}}$  and  $q_{\text{max}}$  is undesirable. While models of  $g_\chi$  often fall off exponentially as  $\exp(-v^2/v_0^2)$ , the momentum form factor sometimes falls off as a power law instead: this is the case for atomic or molecular form factors, for example [24, 36], or the particle-in-a-box from Section 4. For these cases the orthogonal basis can be extended to include sets of radial functions defined on  $[u_{\text{max}}, \infty)$ . In other contexts it may be helpful to have a continuous description of the  $\mathbf{u} \approx \mathbf{0}$  origin. Figure 6, for example, shows blips at the origin of the inverse wavelet transformation even with  $N = 10^3$  coefficients. Some versions of  $F_{\text{DM}}^2$  enhance the contributions from the small  $q$  region, so it can be disproportionately important to model the origin accurately, e.g. by defining orthogonal functions on  $[0, u_{\text{min}}]$  that scale as  $u^\ell Y_{\ell m}$  in the limit of small  $u$ .

A generic hybrid wavelet-harmonic basis might then include small- $u$  functions in  $[0, u_{\text{min}}]$ ; wavelets, for the main  $[u_{\text{min}}, u_{\text{max}}]$  region; narrow-bin polynomials, to replace the  $k$ th order extrapolation within  $[u_{\text{min}}, u_{\text{max}}]$ ; and a class of large- $u$  basis functions, defined on  $[u_{\text{max}}, \infty)$ . An investigation of which analytic results can be extended to these more complicated basis functions is left to future work. For direct detection this is primarily useful in the limit of large DM masses: otherwise, the divergence in  $v_{\text{min}}(q, m_\chi)$  cuts off the  $q \rightarrow 0$  portion of the rate integral, making the near-origin behavior of  $f_S^2(\mathbf{q})$  irrelevant.

## 5.6 Library of Functions and Numeric Implementation

For generic functions  $g_\chi(\mathbf{v})$  or  $f_S^2(\mathbf{q}, E)$ , the projections onto the vector spaces  $g_\chi \rightarrow |g_\chi\rangle$ ,  $f_S^2 \rightarrow |f_S^2\rangle$  usually take longer than the newly-easy rate calculation, unless  $N_{\text{DM}}N_{\mathcal{R}}$  is exceptionally large. The results are also easily saved, especially considering that the wavelet extrapolation methods of Section 3.2 can generate a large number of coefficients from a relatively small initial list. The complete list of  $\ell \leq 36$ ,  $n < 192$  coefficients of  $\langle g_\chi | n\ell m \rangle$ , for example, which when including odd  $\ell$  consists of about  $2.63 \cdot 10^5$  coefficients, is still small enough to fit in an email attachment. A selected list of e.g. the  $10^3$  or  $10^4$  most important coefficients could be printed out and sent through the post.

In this spirit, the numeric implementation of the wavelet-harmonic integration method, Vector Spaces for Dark Matter (vsdm), is available in a preliminary version at

<https://github.com/blillard/vsdlm>.

The repository includes the Python code needed to generate the  $\langle g_\chi | n\ell m \rangle$  and  $\langle n\ell m | f_S^2 \rangle$  coefficients; the analytic expressions for  $I_\star(E)$ ; a routine for assembling  $K_{mm'}^{(\ell)}$ ; and the rate calculation  $R(\mathcal{R})$ , following Eq. (2.25), for discrete final states or for spectra  $dR/dE$ . The repository also includes CSV files of the  $|g_\chi\rangle$  and  $|f_S^2\rangle$  values used in Section 4. In the future, the hope is to expand this list to include physically motivated models for  $g_\chi$  and for  $f_S^2$ .

## 6 Conclusion

The vector space integration method is extremely good at its job, speeding up the evaluation time for a multivariate orientation-dependent analysis by factors of several million. This drastic improvement makes some formerly impossible analyses possible, while analyses that previously were merely difficult are now almost trivially easy. The only part of future calculations requiring substantial numerical work is the projection of new astrophysical or detector models onto their respective vector spaces of velocity or momentum basis functions. This method is highly adaptable, and can be generalized to any functional that depends linearly on some set of input functions.

## Acknowledgements

I thank Pouya Asadi, Carlos Blanco, Matthew Buckley, David Curtan, Valerie Domcke, Peizhi Du, Paddy Fox, Yonatan Kahn, David E. Kaplan, Graham Kribs, Mariangela Lisante, Samuel McDermott, Robert McGehee, Surjeet Rajendran, David Shih, Dave Soper, Scott Thomas, Ken Van Tilberg, Tien-Tien Yu, and Zhengkang Kevin Zhang for helpful and thought-provoking conversations. I especially thank Patrick Draper for collaboration in an early phase of this project, and for related discussions of orthogonal polynomial functions. I thank Ken Van Tilberg for hospitality at the Center for Computational Astrophysics, where some of this work was performed. This work was supported in part by the U.S. Department of Energy under Grant Number DE-SC0011640. This work was performed in part at the Aspen Center for Physics, which is supported by National Science Foundation grant PHY-2210452. This work did not benefit from any access to high-performance computing facilities.

## A Spherical Harmonics and Rotations

### Real Spherical Harmonics

In term of the complex spherical harmonics,

$$Y_\ell^m(\theta, \phi) = (-1)^m \sqrt{\frac{2\ell + 1}{4\pi} \frac{(\ell - m)!}{(\ell + m)!}} P_\ell^m(\cos \theta) e^{im\phi}, \quad (\text{A.1})$$

the real spherical harmonics are defined so that  $m \geq 0$  corresponds to  $\cos(m\phi)$ , and  $m < 0$  to  $\sin(m\phi)$ :

$$Y_{\ell m}(\theta, \phi) \equiv \begin{cases} \sqrt{2} \operatorname{Im} Y_\ell^{|m|}(\theta, \phi) & \text{for } m < 0, \\ Y_\ell^0(\theta, \phi) & \text{for } m = 0, \\ \sqrt{2} \operatorname{Re} Y_\ell^m(\theta, \phi) & \text{for } m > 0, \end{cases} \quad (\text{A.2})$$

with the explicit expression:

$$Y_{\ell m}(\theta, \phi) = \begin{cases} \sqrt{2}(-1)^m \sqrt{\frac{2\ell+1}{4\pi} \frac{(\ell-|m|)!}{(\ell+|m|)!}} P_{\ell}^{|m|}(\cos\theta) \sin(|m|\varphi) & \text{for } m < 0, \\ \sqrt{\frac{2\ell+1}{4\pi}} P_{\ell}(\cos\theta) & \text{for } m = 0, \\ \sqrt{2}(-1)^m \sqrt{\frac{2\ell+1}{4\pi} \frac{(\ell-m)!}{(\ell+m)!}} P_{\ell}^m(\cos\theta) \cos(m\varphi) & \text{for } m > 0. \end{cases} \quad (\text{A.3})$$

Here  $P_{\ell}^m$  are the associated Legendre polynomials,

$$P_{\ell}^m(x) = (-1)^m 2^{\ell} (1-x^2)^{m/2} \sum_{k=m}^{\ell} \frac{k!}{(k-m)!} x^{k-m} \binom{\ell}{k} \binom{\frac{1}{2}(\ell+k-1)}{\ell}, \quad (\text{A.4})$$

$$P_{\ell}^{-m}(x) = (-1)^m \frac{(\ell-m)!}{(\ell+m)!} P_{\ell}^m(x), \quad (\text{A.5})$$

with  $P_{\ell}(x) = P_{\ell}^{m=0}(x)$  given by the  $m = 0$  case. As part of the usual orthogonality relation, the  $P_{\ell}^m$  with fixed  $m$  obey

$$\int_{-1}^1 d\cos\theta P_{\ell}^m(\cos\theta) P_{\ell'}^m(\cos\theta) = \frac{(\ell+m)!}{(\ell-m)!} \frac{2\delta_{\ell\ell'}}{2\ell+1}. \quad (\text{A.6})$$

The inverse mapping from real to complex harmonics is given by

$$Y_{\ell}^m(\Omega) = \begin{cases} \frac{1}{\sqrt{2}}(Y_{\ell|m|} - iY_{\ell,-|m|}) & \text{for } m < 0, \\ \frac{1}{\sqrt{2}}(Y_{\ell|m|} + iY_{\ell,-|m|}) & \text{for } m > 0. \end{cases} \quad (\text{A.7})$$

The complex and real spherical harmonics have the same completeness relation:

$$\delta(\cos\theta_1 - \cos\theta_2)\delta(\phi_1 - \phi_2) = \sum_{\ell m} Y_{\ell m}(\theta_1, \phi_1) Y_{\ell m}(\theta_2, \phi_2), \quad (\text{A.8})$$

and the Legendre polynomial of the dot product between unit vectors  $\hat{x}$  and  $\hat{y}$  can be expanded as

$$P_{\ell}(\hat{x} \cdot \hat{y}) = \frac{4\pi}{2\ell+1} \sum_{m=-\ell}^{\ell} Y_{\ell m}(\hat{x}) Y_{\ell m}(\hat{y}). \quad (\text{A.9})$$

## Rotations and Spherical Harmonics

The  $Y_{\ell}^m$  of fixed  $\ell$  transform under  $\mathcal{R} \in SO(3)$  as a  $2\ell+1$  dimensional irreducible representation of the rotation group:

$$Y_{\ell}^m(\mathbf{v}') = \sum_{m'=-\ell}^{\ell} D_{m'm}^{(\ell)}(\mathcal{R}) Y_{\ell}^{m'}(\mathbf{v}), \quad (\text{A.10})$$

where  $D^{(\ell)}$  is the Wigner D-matrix,

$$D_{m'm}^{(\ell)} = \langle \ell m' | \mathcal{R} | \ell m \rangle, \quad D_{m'm}^{(\ell)\star} = (-1)^{m'-m} D_{-m',-m}^{(\ell)\star}. \quad (\text{A.11})$$

The entries of each  $D^{(\ell)}(\mathcal{R})$  can be calculated without integrating Eq. (A.11); for example,  $D^{(\ell)}(\mathcal{R})$  has explicit solutions in terms of the Euler angles  $(\alpha, \beta, \gamma)$  parameterizing  $\mathcal{R}$ , given in terms of the Jacobi polynomials  $P_j^{(a,b)}(\cos \beta)$ . In the special case  $D_{m0}^{(\ell)}$ , the  $P^{(a,b)}$  simplify to the associated Legendre polynomials, with

$$D_{m0}^{(\ell)\star}(\alpha, \beta, \gamma) = \sqrt{\frac{(\ell-m)!}{(\ell+m)!}} e^{im\alpha} P_\ell^m(\cos \beta) = \sqrt{\frac{4\pi}{2\ell+1}} Y_\ell^m(\beta, \alpha). \quad (\text{A.12})$$

This is particularly relevant for systems with an azimuthal symmetry. In such an example,  $\langle jn\ell m | f_S^2 \rangle \propto \delta_{m0}$ , and generic rotations of the detector require only the  $D_{m'0}$  coefficients of the  $D$  matrix.<sup>2</sup>

For the real spherical harmonics, I define a related  $G_{m'm}^{(\ell)}$  to encode the action of  $\mathcal{R} \in SO(3)$ :

$$\mathcal{R} \cdot Y_{\ell m} \equiv \sum_{m'=-\ell}^{\ell} G_{m'm}^{(\ell)} Y_{\ell m'}, \quad (\text{A.13})$$

where  $G$  is given explicitly as a real function of the Wigner  $D$  matrix:

$$G_{m'm}^{(\ell)} = \begin{cases} \text{Re} \left[ D_{-m',-m}^{(\ell)} - (-1)^{m'} D_{m',-m}^{(\ell)} \right] & m' < 0, m < 0 \\ -\sqrt{2} \text{Im} \left[ D_{-m',0}^{(\ell)} \right] & m' < 0, m = 0 \\ -\text{Im} \left[ D_{-m',m}^{(\ell)} - (-1)^{m'} D_{m',m}^{(\ell)} \right] & m' < 0, m > 0 \\ \sqrt{2} \text{Im} \left[ D_{0,-m}^{(\ell)} \right] & m' = 0, m < 0 \\ \text{Re} \left[ D_{0,0}^{(\ell)} \right] & m' = 0, m = 0 \\ \sqrt{2} \text{Re} \left[ D_{0,m}^{(\ell)} \right] & m' = 0, m > 0 \\ \text{Im} \left[ D_{m',-m}^{(\ell)} + (-1)^{m'} D_{-m',-m}^{(\ell)} \right] & m' > 0, m < 0 \\ \sqrt{2} \text{Re} \left[ D_{m',0}^{(\ell)} \right] & m' > 0, m = 0 \\ \text{Re} \left[ D_{m',m}^{(\ell)} + (-1)^{m'} D_{-m',m}^{(\ell)} \right] & m' > 0, m > 0 \end{cases} \quad (\text{A.14})$$

With this organization, note that the right hand side of Eq. (A.14) uses coefficients  $D_{a,b}$  with  $a = \pm m'$  but  $b = +m$ .

<sup>2</sup>This expression uses the z-y-z type of Euler angle, where  $\beta$  corresponds to an intermediate rotation about the  $\hat{y}$  axis.

## B Analytic Expression for Scattering Matrix

To evaluate Eq. (3.41), begin by defining momentum-dependent bounds on the velocity integral:

$$v_1(q) \equiv \max(v_a, v_{\min}(q)), \quad v_2(q) \equiv \max(v_b, v_1(q)). \quad (\text{B.1})$$

This reshapes the rectangular  $v_a \leq v \leq v_b$ ,  $q_a \leq q \leq q_b$  region of integration to cut out any part where  $v < v_{\min}(q)$ . Define a coordinate  $w \equiv v_{\min}(q)/v$ , so

$$I_\star^{(\ell)} = \int_{q_a}^{q_b} \frac{q dq}{q_\star^2} F_{\text{DM}}^2(q) \frac{v_{\min}^2}{v_\star^2} \int_{w_2(q)}^{w_1(q)} \frac{dw}{w^3} P_\ell(w), \quad (\text{B.2})$$

$$= \int_{q_a}^{q_b} \frac{q dq}{q_\star^2} F_{\text{DM}}^2(q) \frac{(q/q_\star + q_\star/q)^2}{4} \sum_{k=0}^{\ell} \frac{2^\ell}{k!(\ell-k)!} \frac{\Gamma\left(\frac{k+\ell+1}{2}\right)}{\Gamma\left(\frac{k-\ell+1}{2}\right)} \int_{w_2(q)}^{w_1(q)} dw w^{k-3}, \quad (\text{B.3})$$

where  $w_i(q) = v_{\min}/v_i(q)$  for  $i = 1, 2$ , applying the monomial expansion of  $P_\ell(w)$  in the second line. Although some radial basis choices include the  $v \rightarrow \infty$  limit, the expression  $I_\star^{(\ell)}$  is valid only for piecewise constant basis functions, which by definition do not include  $v \rightarrow \infty$  (assuming that the basis functions are normalizable). So  $w$  does not approach zero. For finite  $E$  and  $m_\chi$ ,  $v_\star \neq 0$ , and so  $w$  does not approach  $\infty$  either. Our analysis is not designed for the  $E \rightarrow 0$  limit: we simply assume that  $E$  is bounded from below at some finite positive  $\Delta E_{\min}$ .

So,

$$I_\star^{(\ell)} = \int_{q_a}^{q_b} \frac{q dq}{q_\star^2} F_{\text{DM}}^2(q) \left\{ \sum_{k \neq 2}^{\ell} \frac{2^{\ell-k} \left(\frac{q}{q_\star} + \frac{q_\star}{q}\right)^k}{k!(\ell-k)!} \frac{\Gamma\left(\frac{k+\ell+1}{2}\right)}{\Gamma\left(\frac{k-\ell+1}{2}\right)} \left[ \frac{v_2^{2-k} - v_1^{2-k}}{v_\star^{2-k}(2-k)} \right] + \left[ \frac{2^{\ell-2}}{2(\ell-2)!} \left(\frac{q}{q_\star} + \frac{q_\star}{q}\right)^2 \frac{\Gamma\left(\frac{3+\ell}{2}\right)}{\Gamma\left(\frac{3-\ell}{2}\right)} \log\left(\frac{v_2}{v_1}\right) \right]_{\text{if } \ell \geq 2} \right\}. \quad (\text{B.4})$$

The  $k = 2$  term is evaluated separately, if  $\ell \geq 2$ , as it produces a logarithm rather than monomials in  $v_{1,2}$ .

Completing the momentum integral requires a specific form for  $F_{\text{DM}}(q)$ . Let us take

$$F_{\text{DM}}(q) = \left( \frac{\alpha m_e}{q} \right)^N \quad (\text{B.5})$$

for arbitrary reference momentum  $q_r$  written here as  $\alpha m_e$ . It is also necessary to consider the  $q$  dependence of the  $v_1(q)$  and  $v_2(q)$  boundaries of integration in the  $(q, v)$  plane. Some cases are simple: for example, if  $v_a > v_\star$  for all  $q \in [q_a, q_b]$ , then the integrand is just a sum of terms  $F_{\text{DM}}^2(q/q_\star + q_\star/q)^k$ . Even simpler, if  $v_b \leq v_\star$ , then the integrand vanishes, and  $I_\star = 0$ . On the other hand, if the line  $v = v_{\min}(q)$  passes through the rectangular region  $[q_a, q_b] \times [v_a, v_b]$ , then at least part of the integration boundary is not flat. Analytic results can be derived for  $I_\star^{(\ell)}$  in every case.

Given the constants  $v_a$  and  $v_b$ , let us define a  $q_\pm$  and a  $\tilde{q}_\pm$  as the real solutions to

$$v_{\min}(q_\pm) \equiv v_a, \quad \frac{q_\pm}{q_\star} = \frac{v_a}{v_\star} \pm \sqrt{\frac{v_a^2}{v_\star^2} - 1} \quad (\text{B.6})$$

$$v_{\min}(\tilde{q}_\pm) \equiv v_b, \quad \frac{\tilde{q}_\pm}{q_\star} = \frac{v_b}{v_\star} \pm \sqrt{\frac{v_b^2}{v_\star^2} - 1}, \quad (\text{B.7})$$



with  $q_*$  and  $v_*$  defined in Eq. (3.42). These points mark the transitions between rectangular  $v$  integrals, with the lower bound set by  $v = v_a$ , and curved regions bounded instead by  $v \geq v_{\min}(q)$ . If  $v_a < v_*$  but  $v_b > v_*$ , then  $v \geq v_{\min}$  sets the lower bound throughout the full range of  $q$ . A generic rectangular region can be split up as follows:

$$q \leq \tilde{q}_- \longrightarrow \text{integrand vanishes} \quad (\text{B.8})$$

$$\tilde{q}_- \leq q \leq q_- \longrightarrow v_{\min}(q) \text{ sets lower bound} \quad (\text{B.9})$$

$$q_- \leq q \leq q_+ \longrightarrow v_a \text{ sets lower bound, if } v_a > v_* \quad (\text{B.10})$$

$$q_+ \leq q \leq \tilde{q}_+ \longrightarrow v_{\min}(q) \text{ sets lower bound} \quad (\text{B.11})$$

$$\tilde{q}_+ \leq q \longrightarrow \text{integrand vanishes.} \quad (\text{B.12})$$

So, there are at most three nonzero regions, which depend on two types of integral.

For the rectangular regions, define a

$$T_N^{(\ell)}([v_1, v_2], [q_1, q_2]) \equiv \int_{q_1}^{q_2} \frac{q dq}{q_*^2} \left(\frac{q_*}{q}\right)^{2N} \int_{v_1}^{v_2} \frac{v dv}{v_*^2} P_\ell\left(\frac{v_{\min}}{v}\right), \quad (\text{B.13})$$

$$B_{N,k}(x) \equiv \frac{1}{2} \int_{x_0}^x \frac{dy}{y^{k/2}} y^{-N} (1+y)^k, \quad (\text{B.14})$$

defined in terms of an arbitrary but positive reference point  $x_0 > 0$ . In this notation it is assumed that  $v$  and  $q$  are ordered, that is  $v_1 \leq v_2$  and  $q_1 \leq q_2$ .  $T_N$  vanishes if  $v_1 = v_2$  or  $q_1 = q_2$ .

$B_{N,k}$  can be written in terms of a hypergeometric  ${}_2F_1$  function, or explicitly as

$$B_{N,k}(x) - B_{N,k}(x_0) = \frac{1}{2} \sum_{j=0}^k \binom{k}{j} \left[ \left\{ \frac{x^{j-n-\frac{k}{2}+1}}{j-n-\frac{k}{2}+1} \right\}_{\text{if } j \neq n+\frac{k}{2}-1} + \delta_{n+\frac{k}{2}-1}^j \log(x) \right]. \quad (\text{B.15})$$

An explicit expression for  $T^{(\ell)}$  can be read from Eq. (B.4):

$$T_N^{(\ell)}([v_1, v_2], [q_1, q_2]) = \left\{ \sum_{k \neq 2}^{\ell} \frac{2^{\ell-k} B_{N,k}(x) \Gamma\left(\frac{k+\ell+1}{2}\right)}{k!(\ell-k)! \Gamma\left(\frac{k-\ell+1}{2}\right)} \left(\frac{v_2^{2-k} - v_1^{2-k}}{v_*^{2-k}(2-k)}\right) + \left[ \frac{2^{\ell-2} B_{N,2}(x) \Gamma\left(\frac{3+\ell}{2}\right)}{2(\ell-2)! \Gamma\left(\frac{3-\ell}{2}\right)} \log\left(\frac{v_2}{v_1}\right) \right]_{\text{if } \ell \geq 2} \right\} \Big|_{x=q_1^2/q_*^2}^{q_2^2/q_*^2} \quad (\text{B.16})$$

In the special case where  $q_a$  and  $q_b$  are both contained within the interval  $[q_-, q_+]$ , note that

$$I_*^{(\ell)} \Big|_{q_a, q_b \in [q_-, q_+]} = \left(\frac{\alpha m_e}{q_*}\right)^{2N} T_N^{(\ell)}([v_a, v_b], [q_a, q_b]). \quad (\text{B.17})$$

For the non-rectangular regions, bounded by  $v \geq v_{\min}$ , define an analogous

$$U_N^{(\ell)}(v_2, [q_1, q_2]) \equiv \int_{q_1}^{q_2} \frac{q dq}{q_*^2} \left(\frac{q_*}{q}\right)^{2N} \int_{v_{\min}}^{v_2} \frac{v dv}{v_*^2} P_\ell\left(\frac{v_{\min}}{v}\right). \quad (\text{B.18})$$

Integrating the  $k \neq 2$  terms in Eq. (B.4) remains simple: but, the replacement  $v_1 \rightarrow v_{\min}$  introduces a logarithmic dependence on  $v_{\min}(q)$ , requiring new integrals. Define

$$S_N(x) \Big|_{q_1^2/q_*^2}^{q_2^2/q_*^2} \equiv \int_{q_1}^{q_2} \frac{dq}{q_*} \left(\frac{q}{q_*}\right)^{-2N-1} \left(1 + \frac{q^2}{q_*^2}\right)^2 \log\left(\frac{v_*}{2v_{\min}}\right). \quad (\text{B.19})$$

Integrating by parts, and defining  $t \equiv q/q_*$ ,

$$dV_N = dt t^{-2N-1} (1+t^2)^2, \quad u = -\log\left(t + \frac{1}{t}\right), \quad du = \frac{dt}{t} \frac{1-t^2}{1+t^2}, \quad (\text{B.20})$$

where  $V_N$  is given in terms of  $x = t^2$  by

$$V_{N \neq 0,1,2}(x) = \frac{1}{2} \frac{x^{-N}}{-N} + \frac{x^{-N+1}}{-N+1} + \frac{1}{2} \frac{x^{-N+2}}{-N+2} \quad (\text{B.21})$$

in the generic cases. For special cases  $N = 0, 1, 2$ , the term taking the form  $x^{-s}/(-s)$  with  $s = 0$  is replaced with  $\log(x)$ :

$$V_0(x) = \frac{1}{2} \log x + x + \frac{1}{4} x^2 \quad (\text{B.22})$$

$$V_1(x) = \frac{1}{2x} + \log x + \frac{x}{2} \quad (\text{B.23})$$

$$V_2(x) = -\frac{1}{4x^2} - \frac{1}{x} + \frac{1}{2} \log x. \quad (\text{B.24})$$

With this,

$$S_N(x) \Big|_{x_1}^{x_2} = \left( V_N(x) \log\left(\frac{\sqrt{x}}{1+x}\right) \right) \Big|_{x_1}^{x_2} - \int_{x_1}^{x_2} \frac{dx}{2x} \left(\frac{1-x}{1+x}\right) V_N(x). \quad (\text{B.25})$$

To complete the remaining integral, define

$$C_\alpha(x) \equiv - \int^x \frac{dx'}{2x'} \left(\frac{1-x'}{1+x'}\right) \frac{x'^\alpha}{\alpha} \quad (\text{B.26})$$

for  $\alpha \neq 0$ , and

$$C_0(x) \equiv - \int^x \frac{dx'}{2x'} \left(\frac{1-x'}{1+x'}\right) \log(x) = -\frac{(\log x)^2}{4} + (\log x) \log(1+x) + \text{Li}_2(-x), \quad (\text{B.27})$$

for any logarithmic “ $\alpha = 0$ ” terms in  $V_N$ . Here  $\text{Li}_2(-x)$  is the dilogarithm: it is real and negative for  $x > 0$ . It is related to the Spence function via  $\text{Spence}(z) = \text{Li}_2(1-z)$ .

The values of  $\alpha$  appearing from  $V_N$  are  $\alpha = -N, -N+1, -N+2$ , so only  $\alpha = -2, -1, 0, 1, 2$  are needed for the common cases  $N = 0, 2$ :

$$C_{-2}(x) = -\frac{1}{8x^2} + \frac{1}{2x} - \frac{1}{2} \log \frac{1+x}{x}, \quad (\text{B.28})$$

$$C_{-1}(x) = -\frac{1}{2x} + \log \frac{1+x}{x}, \quad (\text{B.29})$$

$$C_1(x) = \frac{x}{2} - \log(1+x), \quad (\text{B.30})$$

$$C_2(x) = \frac{1}{8} (-4x + x^2 + 4 \log(1+x)). \quad (\text{B.31})$$

Each  $C_\alpha$  is defined only up to a constant, so I remove any constant terms to simplify each expression. For other values of  $\alpha$ , with the exception of negative integers, one can use

$$C_\alpha(x) = \frac{x^\alpha}{\alpha^2} \left[ \frac{1}{2} - {}_2F_1 \left( \begin{matrix} 1, & \alpha \\ 1 + \alpha \end{matrix} \middle| -x \right) \right] \quad (\text{B.32})$$

directly. With these results, it is now possible to evaluate

$$S_N(x) = \left( V_N(x) \log \left( \frac{\sqrt{x}}{1+x} \right) \right) + \left[ \frac{1}{2} C_{-N}(x) + C_{1-N}(x) + \frac{1}{2} C_{2-N}(x) \right], \quad (\text{B.33})$$

which can in turn be used to evaluate the  $k = 2$  part of  $U^{(\ell)}$ . The result:

$$U_N^{(\ell)}(v_2, [q_1, q_2]) = \left\{ \sum_{k \neq 2}^{\ell} \frac{2^{\ell-k}}{k!(\ell-k)!} \frac{\Gamma\left(\frac{k+\ell+1}{2}\right)}{\Gamma\left(\frac{k-\ell+1}{2}\right)} \left( \left( \frac{v_2}{v_\star} \right)^{2-k} \frac{B_{N,k}(x)}{(2-k)} - \frac{2^{k-2} B_{N,2}(x)}{(2-k)} \right) + \left[ \frac{2^{\ell-2}}{2(\ell-2)!} \frac{\Gamma\left(\frac{3+\ell}{2}\right)}{\Gamma\left(\frac{3-\ell}{2}\right)} \left( \log \frac{2v_2}{v_\star} B_{N,2}(x) + S_N(x) \right) \right] \right\}_{\text{if } \ell \geq 2} \Bigg|_{x=q_1^2/q_\star^2}^{q_2^2/q_\star^2} \quad (\text{B.34})$$

## Main Result

Now,  $I_\star^{(\ell)}$  can be assembled from the explicit solutions for  $T^{(\ell)}$  and  $U^{(\ell)}$ . The general form is

$$I_\star^{(\ell)} = \left( \frac{\alpha m_e}{q_\star} \right)^{2N} \left( U_N^{(\ell)}(v_2, [q_1, q_2]) + T_N^{(\ell)}([v_1, v_2], [q_2, q_3]) + U_N^{(\ell)}(v_2, [q_3, q_4]) \right). \quad (\text{B.35})$$

This admits all three types of boundary, Eqs. (B.9–B.11), where  $q_1$  is given either by  $q_a$  or  $\tilde{q}_-$ ;  $q_4$  is given by  $q_b$  or  $\tilde{q}_+$ ; and  $q_2$  and  $q_3$  can be  $q_-$  and  $q_+$ , respectively. The first or second  $U^{(\ell)}$  term disappears if  $q_a > q_-$  or if  $q_b < q_+$ , respectively. Likewise, if the interval  $[q_-, q_+]$  has no overlap with  $[q_-, q_+]$ , or if  $v_1 < v_\star$ , then there is no  $T^{(\ell)}$  term: in these cases there is a single  $U^{(\ell)}$  term, with the endpoints given by  $\max(q_a, \tilde{q}_-)$  and  $\min(q_b, \tilde{q}_+)$ .

Here are the values of  $q_i$  to be used in each case. For the trivial cases:

$$\text{if } v_2 < v_\star \text{ or } q_b < \tilde{q}_- \text{ or } q_a > \tilde{q}_+: \quad q_1 \equiv q_2 \equiv q_3 \equiv q_4, \quad \longrightarrow \quad I_\star^{(\ell)} = 0. \quad (\text{B.36})$$

For the nontrivial cases, the  $q_1$  and  $q_4$  endpoints can always be described as:

$$q_1 = \max(q_a, \tilde{q}_-), \quad q_4 = \min(\tilde{q}_+, q_b). \quad (\text{B.37})$$

The definitions of  $q_2$  and  $q_3$  depend on the relationship between the intervals  $[q_a, q_b]$  and  $[q_-, q_+]$ . If these are disjoint, then there is no  $T^{(\ell)}$  region: that is,

$$\text{if } q_b < q_- \text{ or } q_a > q_+: \quad q_2 \equiv q_3, \quad \longrightarrow \quad I_\star^{(\ell)} = \left( \frac{\alpha m_e}{q_\star} \right)^{2N} U_N^{(\ell)}(v_2, [q_1, q_4]). \quad (\text{B.38})$$

Finally, the remaining cases can be summarized in a single line:

$$\text{if } q_a < q_+ \text{ and } q_b > q_-: \quad q_2 = \max(q_-, q_a), \quad q_3 = \min(q_b, q_+), \quad (\text{B.39})$$

and  $I_\star^{(\ell)}$  is given by Eq. (B.35). Recall that  $T^{(\ell)}$  and  $U^{(\ell)}$  vanish when their  $[q_i, q_j]$  arguments are identical: for example, if  $q_a > q_-$ , then  $q_1 = q_2$  removes the first  $U^{(\ell)}$  term in Eq. (B.35).

## C Interpolation and Wavelet Extrapolation

### C.1 Haar wavelets

One corollary of Eqs. (3.15–3.17) is that the parameters of a cubic interpolation can be extracted from the three wavelets  $(0, 0)$ ,  $(1, 0)$  and  $(1, 1)$ :

$$\Delta^1 f'_0 = \frac{4}{3A_*\Delta} \left( -7 \langle f | (0, 0) \rangle + 4\sqrt{2} \langle f | (1, 0) \rangle + 4\sqrt{2} \langle f | (1, 1) \rangle \right) \quad (\text{C.1})$$

$$\Delta^2 f''_0 = \frac{16\sqrt{2}}{A_*\Delta} \left( \langle f | (1, 0) \rangle - \langle f | (1, 1) \rangle \right) \quad (\text{C.2})$$

$$\Delta^3 f_0^{(3)} = \frac{256}{A_*\Delta} \left( \langle f | (0, 0) \rangle - \sqrt{2} \langle f | (1, 0) \rangle - \sqrt{2} \langle f | (1, 1) \rangle \right). \quad (\text{C.3})$$

Here  $(0, 0)$ ,  $(1, 0)$  and  $(1, 1)$  refer respectively to the  $|\lambda_*\mu_*\rangle$ ,  $|\lambda_* + 1, 2\mu_*\rangle$  and  $|\lambda_* + 1, 2\mu_* + 1\rangle$  wavelets, and the derivatives  $f_0^{(k)}$  refer to  $f^{(k)}(x_2)$ , with  $x_2$  at the center of the  $(0, 0)$  wavelet. An interpolating function  $f(x)$  also requires the value of  $f(x_2)$ : one can use the  $f_0 = f(u_0)$  generated by the  $\lambda \leq \lambda_*$  wavelet expansion, but for the purposes of interpolation it is more precise to calculate  $f_0 = f(x_2)$  by evaluating the function directly.

In the case of approximately constant  $f^{(3)}(x)$ , where  $f(x)$  in  $[x_a, x_b]$  is well approximated by a cubic polynomial, all of the higher-order wavelet coefficients can be obtained from  $(0, 0)$ ,  $(1, 0)$  and  $(1, 1)$ . Take the  $(\delta\lambda, \delta\mu)$  wavelet, i.e.  $|\lambda, \mu\rangle$  with  $\lambda = \lambda_* + \delta\lambda$  and  $\mu = 2^{\lambda - \lambda_*}\mu_* + \delta\mu$ . Direct integration of Eq. (3.14) yields

$$\begin{aligned} \langle f | (\delta\lambda, \delta\mu) \rangle \simeq & -\frac{\sqrt{2}^{\delta\lambda} A_*\Delta}{4 \cdot 2^{\delta\lambda}} \left[ f'_0 \left( \frac{\Delta}{2^{\delta\lambda}} \right) - (2^{\delta\lambda} - 1 - 2\delta\mu) \frac{f''_0}{2} \left( \frac{\Delta}{2^{\delta\lambda}} \right)^2 \right. \\ & \left. + \left( \frac{7}{8} + \frac{3}{4} (4^{\delta\lambda} - 2^{1+\delta\lambda}) + 3\delta\mu (2^{\delta\lambda} - 1 - \delta\mu) \right) \frac{f_0^{(3)}}{6} \left( \frac{\Delta}{2^{\delta\lambda}} \right)^3 \right], \quad (\text{C.4}) \end{aligned}$$

up to corrections of  $\mathcal{O}(f^{(4)}\Delta^4)$ . Once the wavelet expansion of  $f$  reaches the point where  $f^{(k)}\Delta^k \lesssim \epsilon$  (for some error tolerance  $\epsilon$ ) throughout the entire range  $u \in [0, 1]$ , the remaining wavelet coefficients can all be found from Eq. (C.4).

Note that the relative size of the wavelet coefficients are determined by  $f'_0\Delta^{2-\delta\lambda}$ , so the extrapolation is useful whenever

$$\Delta^4 f_0^{(4)} < \epsilon < f'_0 \frac{\Delta}{2}. \quad (\text{C.5})$$

That is, the values of the  $\delta\lambda \leq 1$  coefficients can be used to infer the values for all  $\delta\lambda \geq 2$ , until  $f'_0\Delta/2^{\delta\lambda}$  and  $\Delta^4 f_0^{(4)}$  become comparable in size. Considering that the error in the cubic interpolation scales as  $\Delta^4 f^{(4)}$ , while the value of  $\langle f | \lambda\mu \rangle$  scales as  $f'\Delta$ , we can use the extrapolation method to predict wavelet coefficients as far as:

$$\delta\lambda \lesssim \log_2 \frac{\langle f'_0 \rangle}{\Delta^3 \langle f_0^{(4)} \rangle} = 3\lambda_* + \log_2 \frac{\langle f'_0 \rangle}{\langle f_0^{(4)} \rangle}. \quad (\text{C.6})$$

Here  $\langle f_0^{(p)} \rangle$  refers to the typical size of the  $p$ th derivative (dimensionless, with respect to  $x \in [0, 1]$ ) in this region. Using the cubic extrapolation, the information from the first  $\lambda \leq \lambda_* + 1$  wavelet

generations can be used to predict the values of the following  $3\lambda_\star - 2$  generations. Comparing the number of coefficients generated this way to the original set obtained by integration,

$$\frac{n_{\text{coeffs}} \text{ from cubic extrapolation}}{n_{\text{coeffs}} \text{ from direct integration}} = \frac{2^{\lambda_\star + \delta\lambda + 1}}{2^{\lambda_\star + 2}} \sim \frac{8^{\lambda_\star}}{4}, \quad (\text{C.7})$$

it is clear that a relatively small number of inputs can generate a huge number of coefficients if  $\lambda_\star \gtrsim$  few.

This scaling assumes that the derivatives  $f^{(p)}$  are known exactly, in which case each new generation of wavelet coefficients can be used to increase the precision by a factor of 16. When  $f^{(p)}$  are extracted from the values of  $\langle f | \lambda\mu \rangle$ , the imperfect reconstruction of  $f'$ ,  $f''$  and  $f^{(3)}$  introduces another small source of error. As a result, the precision of the interpolating function near the edges of each bin increases by a factor of eight with each new generation, rather than 16, when  $f^{(p)}$  is calculated from the wavelet coefficients.

## C.2 Spherical Wavelets

As in the previous section, let  $|(0, 0)\rangle$  refer to a specific  $|\lambda_\star\mu_\star\rangle$ , where the cubic Taylor series is assumed to be a sufficiently precise approximation of  $f(x)$  in  $x_1 \leq x \leq x_3$ . The only difference is that now  $|\lambda\mu\rangle$  refers to a spherical wavelet, Eq. (3.5), rather than a Haar wavelet. Defining  $|(\delta\lambda, \delta\mu)\rangle$  with respect to  $\lambda_\star, \mu_\star$  as

$$|(\delta\lambda, \delta\mu)\rangle \equiv |\lambda_\star + \delta\lambda, 2^{\delta\lambda}\mu_\star + \delta\mu\rangle, \quad (\text{C.8})$$

the projection  $\langle f | (\delta\lambda, \delta\mu)\rangle$  can be taken directly from Eq. (3.22) with the following substitutions:

$$\Delta \rightarrow 2^{-\delta\lambda}\Delta_\star, \quad \mu \rightarrow 2^{\delta\lambda}\mu_\star + \delta\mu, \quad (\text{C.9})$$

and with  $F_p(\delta\lambda, \delta\mu)$  given as a function of  $F_p^{(0)} \equiv F_p(\lambda_\star, \mu_\star)$  as:

$$F_p(\delta\lambda, \delta\mu) = \sum_{k \geq p} \frac{F_k^\star}{2^{\delta\lambda}} \frac{k!}{p!(k-p)!} \left( \frac{2\delta\mu + 1}{2^{\delta\lambda}} - 1 \right)^{k-p}. \quad (\text{C.10})$$

**Cubic Interpolation:** Given  $\langle f | 0 \rangle$ ,  $\langle f | - \rangle$ , and  $\langle f | + \rangle$ , referring respectively to the  $(0, 0)$ ,  $(1, 0)$ , and  $(1, 1)$  wavelets, the values of  $F_p \propto f_0^{(p)}$  for  $p = 1, 2, 3$  can be extracted by inverting Eq. (3.22). Once these derivatives are known, all higher order  $\langle f | \lambda\mu \rangle$  coefficients are given by the cubic approximation of Eq. (3.22).

Simplifying Eq. (C.10) for the  $\delta\lambda = 1$  case with  $p \leq 3$ ,

$$F_1^\pm = \frac{1}{2}F_1^\star \pm \frac{1}{2}F_2^\star + \frac{3}{8}F_3^\star, \quad F_2^\pm = \frac{1}{2}F_2^\star \pm \frac{3}{4}F_3^\star, \quad F_3^\pm = \frac{1}{2}F_3^\star \quad (\text{C.11})$$

where the  $\pm$  sign is positive for  $\delta\mu = 1$ , negative for  $\delta\mu = 0$ . In terms of  $F_p$  and  $H_p(\lambda, \mu)$ , the three wavelet coefficients are given by

$$\langle f | 0 \rangle \simeq F_1^\star H_1^{(0)} + F_2^\star H_2^{(0)} + F_3^\star H_3^{(0)}, \quad (\text{C.12})$$

$$\langle f | \pm \rangle \simeq F_1^\star C_1^\pm + F_2^\star C_2^\pm + F_3^\star C_3^\pm, \quad (\text{C.13})$$

with 0, + and - referring to coefficients  $(0, 0)$ ,  $(1, 0)$  and  $(1, 1)$ , respectively, and where

$$C_1^\pm \equiv \frac{1}{2}H_1(\pm), \quad C_2^\pm \equiv \frac{1}{2}H_2(\pm) \pm \frac{1}{2}H_1(\pm) \quad C_3^\pm \equiv \frac{1}{2}H_3(\pm) \pm \frac{3}{4}H_2(\pm) + \frac{3}{8}H_1(\pm). \quad (\text{C.14})$$

Inverting this system of equations to find  $F_p^{(0)}$  and  $f_0^{(p)}$  is straightforward algebra. One way to represent the solution is:

$$F_1^* \simeq d_1/D, \quad F_2^* \simeq d_2/D, \quad F_3^* \simeq d_3/D, \quad (\text{C.15})$$

$$d_1 \equiv \begin{pmatrix} \langle f|0\rangle & H_2^0 & H_3^0 \\ \langle f|- \rangle & C_2^- & C_3^- \\ \langle f|+ \rangle & C_2^+ & C_3^+ \end{pmatrix}, \quad d_2 \equiv \begin{pmatrix} H_1^0 & \langle f|0\rangle & H_3^0 \\ C_1^- & \langle f|- \rangle & C_3^- \\ C_1^+ & \langle f|+ \rangle & C_3^+ \end{pmatrix}, \quad d_3 \equiv \begin{pmatrix} H_1^0 & H_2^0 & \langle f|0\rangle \\ C_1^- & C_2^- & \langle f|- \rangle \\ C_1^+ & C_2^+ & \langle f|+ \rangle \end{pmatrix}, \quad (\text{C.16})$$

with

$$D \equiv \begin{pmatrix} H_1^0 & H_2^0 & H_3^0 \\ C_1^- & C_2^- & C_3^- \\ C_1^+ & C_2^+ & C_3^+ \end{pmatrix}. \quad (\text{C.17})$$

Given the Eq. (C.15) solutions to  $F_p^*$ , recall that the derivatives themselves satisfy

$$f_0^{(p)} = 2^{p(\lambda_*+1)} F_p^*/(p!). \quad (\text{C.18})$$

Once  $f_0^{(p)}$  are known, the descendent wavelets (with bases of support that overlap with the  $|\lambda_*\mu_*\rangle$  wavelet) can all be calculated via

$$\langle f | (\delta\lambda, \delta\mu) \rangle \simeq \sum_{p \geq 1} F_p(\delta\lambda, \delta\mu) H_p(\lambda, \mu), \quad (\text{C.19})$$

where  $\lambda = \lambda_* + \delta\lambda$ ,  $\mu = 2^{\lambda_*} \mu_* + \delta\mu$ . These solutions are approximate, with an accuracy controlled by the size of the missing  $\Delta^4 f^{(4)}$  terms. Considering that the wavelet coefficients scale as  $\Delta^1 f^{(1)}$  at leading order, the precision of the wavelet extrapolation should improve by a power of 8 with each new generation of wavelet coefficients, just like the Haar wavelets.

**Generalization:** Despite the focus on the cubic extrapolation, many of the results of this section leave  $p$  generic, to make it easy to derive higher-order methods. For example, a seventh order wavelet extrapolation would involve derivatives out to  $p \leq 7$ , and it would include the values of the four  $\delta\lambda = 2$  wavelets to constrain  $F_{1\dots 7}$ . Extending Eq. (C.13), the linear system includes seven equations of the form

$$\langle f | \delta\lambda, \delta\mu \rangle = \sum_{k=1}^7 \left( \sum_{p=1}^k a_{k,p}(\delta\lambda, \delta\mu) H_p(\lambda, \mu) \right) F_k^*, \quad (\text{C.20})$$

$$a_{k,p} \equiv \frac{1}{2^{\delta\lambda}} \frac{k!}{p!(k-p)!} \left( \frac{2\delta\mu + 1}{2^{\delta\lambda}} - 1 \right)^{k-p}. \quad (\text{C.21})$$

The matrix appearing in Eq. (C.17) expands rightwards with  $p \rightarrow 7$ , and downwards to include the four new coefficients.

Once  $\Delta_*$  is small enough that the Taylor series converges, subsequent increases in  $\delta\lambda$  increase the precision of the wavelet expansion by factors of  $2^7 = 128$ . The computational price is that we must solve a  $7 \times 7$  system of equations for  $F_k^*$ , rather than two neighboring  $3 \times 3$  systems.

For some applications, the simpler  $p = 1$  linear extrapolation may be sufficiently precise. Here  $f_0'$  is determined just by  $\langle f | (0, 0) \rangle$ ,

$$\frac{\Delta f_0'}{2} = F_1 \simeq \frac{\langle f | \lambda_* \mu_* \rangle}{H_1(\lambda_*, \mu_*)}, \quad (\text{C.22})$$

on the assumption that all  $f^{(p)}$  derivatives with  $p \geq 2$  are irrelevant.

**Interpolation:** For the scattering rate calculation the coefficients  $\langle f|\lambda\mu\rangle$  themselves are more important than the reconstruction of  $f$ . Even so, a wavelet-defined smooth interpolating function for  $f(x)$  may be useful. Using Eq. (C.19) to estimate the  $\lambda \gg \lambda_*$  wavelet coefficients produces a precise reconstruction of the function  $f(x)$ . As in the Haar wavelet version, one must supply the value of  $f_0 = f(x_2)$  at the center of the region, either from the inverse wavelet transformation or (more precisely) from  $f(x)$  directly.

In many cases, e.g. if  $f(x)$  is a closed-form analytic function, it is easier to get the  $f_0^{(p)}$  values directly from the derivatives  $f^{(p)}(x)$ , rather than from integrating  $\langle f|\lambda\mu\rangle$ . Bypassing the  $\langle f|0\rangle$  and  $\langle f|\pm\rangle$  integrals removes two generations of wavelets from the list of coefficients that must be obtained from integration, reducing the difficulty of the calculation by a factor of 4, while also increasing the precision of the interpolation. In this case, the relative precision improves by a factor of  $2^4$  with every subsequent generation of wavelets, rather than  $2^3$ .

## D Transformations From A Gaussian Basis

A normalized spherical 3d Gaussian has the form

$$g_i(\mathbf{u}, \mathbf{u}_i, \sigma_i) = \frac{e^{-|\mathbf{u}-\mathbf{u}_i|^2/2\sigma_i^2}}{\sigma_i^3 (2\pi)^{3/2}}, \quad \int d^3u g_i(\mathbf{u}, \mathbf{u}_i, \sigma_i) \equiv 1, \quad (\text{D.1})$$

for a Gaussian with width parameterized by  $\sigma_i$ , centered at  $\mathbf{u}_i$ , as a function of  $\mathbf{u}$ . (Everything in this section applies equally well to 3d functions of velocity or momentum.) The exponential of the dot product can be expanded in Legendre polynomials,

$$e^{x \cos \theta} = \sum_{\ell=0}^{\infty} (2\ell+1) i_\ell^{(1)}(x) P_\ell(\cos \theta), \quad i_\ell^{(1)}(z) = i^{-\ell} j_\ell(iz) = \sqrt{\frac{\pi}{2z}} I_{\ell+1/2}(z), \quad (\text{D.2})$$

where  $i_\ell^{(1)}$  is the  $\ell$ th spherical modified Bessel function of the first kind. For integer  $\ell \geq 0$ ,  $i_\ell^{(1)}(z)$  can be written in terms of rational functions involving  $\sinh x$  and  $\cosh x$ , via [72]

$$i_\ell(z) = z^\ell \left[ \frac{d}{z dz} \right]^\ell \left( \frac{\sinh z}{z} \right). \quad (\text{D.3})$$

Note that for  $z = 0$ ,

$$i_\ell^{(1)}(z) \simeq z^\ell \left( \frac{\sqrt{\pi}}{2^{1+\ell} \Gamma(\frac{3}{2} + \ell)} + \mathcal{O}(z^2) \right), \quad i_0^{(1)}(0) = 1, \quad i_{\ell \geq 1}^{(1)}(0) = 0, \quad (\text{D.4})$$

while in the large  $z$  limit  $i_\ell^{(1)}(z)$  grows as  $\exp(z)$ . For integer  $\ell$ ,  $i_\ell^{(1)}$  can be written as rational functions of  $z$  multiplying  $\sinh z$  and  $\cosh z$ ,

$$i_\ell^{(1)}(z) = f_\ell(z) \sinh z + f_{-\ell-1}(z) \cosh z, \quad (\text{D.5})$$

for  $f_\ell(z)$  given by the recursion relations [72]:

$$f_0(z) = \frac{1}{z}, \quad f_1(z) = -\frac{1}{z^2}, \quad f_{\ell-1} - f_{\ell+1} = \frac{2\ell+1}{z} f_\ell. \quad (\text{D.6})$$

The functions  $z^{\ell+1}f_\ell(z)$  and  $z^{\ell+1}f_{-(\ell+1)}(z)$  are polynomials of order  $\ell$  or  $\ell - 1$ .

Using the orthogonality of the spherical harmonics,

$$g_i = \frac{4\pi}{(2\pi)^{3/2}\sigma_i^3} \exp\left(-\frac{u^2 + u_i^2}{2\sigma_i^2}\right) \sum_{\ell=0}^{\infty} \sum_{m=-\ell}^{\ell} i_\ell^{(1)}\left(\frac{u_i u}{\sigma_i^2}\right) Y_{\ell m}(\hat{u}) Y_{\ell m}(\hat{u}_i), \quad (\text{D.7})$$

$$\langle g_i(\mathbf{u}_i, \sigma_i) | n\ell m \rangle = \sqrt{\frac{2}{\pi}} \frac{Y_{\ell m}(\hat{u}_i)}{u_0^3} \int_0^\infty \frac{u^2 du}{\sigma_i^3} r_n^{(\ell)}(u) e^{-(u^2 + u_i^2)/2\sigma_i^2} i_\ell^{(1)}\left(\frac{u_i u}{\sigma_i^2}\right), \quad (\text{D.8})$$

where  $r_n^{(\ell)}(u)$  is the radial basis function, which can in principle depend on  $\ell$ . So,  $\langle g_i | n\ell m \rangle$  is determined by a 1d integral rather than a 3d one:

$$\langle g_i(\mathbf{u}_i, \sigma_i) | n\ell m \rangle \equiv \frac{1}{u_0^3} Y_{\ell m}(\hat{u}_i) \mathcal{G}_{n\ell}(u_i, \sigma_i), \quad (\text{D.9})$$

$$\mathcal{G}_{n\ell}(u_i, \sigma_i) = \sqrt{\frac{2}{\pi}} \int_0^\infty \frac{u^2 du}{\sigma_i^3} r_n^{(\ell)}(u) e^{-(u^2 + u_i^2)/2\sigma_i^2} i_\ell^{(1)}\left(\frac{u_i u}{\sigma_i^2}\right). \quad (\text{D.10})$$

$\mathcal{G}_{n\ell}$  does not depend on the index  $m$ : so, not only is the  $\mathcal{G}$  integral 1d rather than 3d, it also only needs to be evaluated once for every  $(n\ell)$ , rather than for every  $(n\ell m)$ . Following the pattern demonstrated elsewhere in this paper, one analytic simplification has led automatically to another one.

Using the Eq. (D.5) property of the  $i_\ell^{(1)}$  functions, the Eq. (D.9) integrand can be simplified further. Introducing polynomials  $P_\ell(z)$  and  $Q_\ell(z)$ ,

$$P_\ell(z) = z^{\ell+1}f_\ell(z), \quad Q_\ell(z) = z^{\ell+1}f_{-\ell-1}(z), \quad i_\ell^{(1)}(z) = \frac{P_\ell(z) \sinh z + Q_\ell(z) \cosh z}{z^{\ell+1}}, \quad (\text{D.11})$$

the integral  $\mathcal{G}_{n\ell}$  is equivalently:

$$\mathcal{G}_{n\ell} = \sqrt{\frac{2}{\pi}} \int_0^\infty \frac{x dx}{x^\ell} r_n^\ell(x\sigma_i) \left[ \frac{Q_\ell(x) + P_\ell(x)}{2} e^{-(x-x_i)^2} + \frac{Q_\ell(x) - P_\ell(x)}{2} e^{-(x+x_i)^2} \right], \quad (\text{D.12})$$

defining  $x = u/(\sqrt{2}\sigma_i)$  and  $x_i = u_i/(\sqrt{2}\sigma_i)$ . So, it is not actually necessary to refer to  $I_{\ell+1/2}(z)$  when evaluating  $\mathcal{G}_{n\ell}$  numerically.

## Functions in Gaussian Basis

Functions  $g(u)$  that are comprised of sums of gaussians of the form Eq. (5.22) can be written in terms of  $\mathcal{G}$  and  $u_0$ :

$$|g\rangle \equiv \sum_i c_i |g_i(\mathbf{u}_i, \sigma_i)\rangle, \quad (\text{D.13})$$

$$\langle g | n\ell m \rangle = \sum_i c_i \langle n\ell m | g_i(\mathbf{u}_i, \sigma_i) \rangle = \sum_i c_i \frac{Y_{\ell m}(\hat{u}_i)}{u_0^3} \mathcal{G}_{n\ell}(u_i, \sigma_i). \quad (\text{D.14})$$

So, the  $\langle n\ell m | g_i(\mathbf{u}_i, \sigma_i) \rangle$  can be thought of as coefficients of a matrix that maps the Gaussian basis spanned by  $|g_i\rangle$  onto the orthogonal wavelet-harmonic basis spanned by  $|n\ell m\rangle$ .



In Section 3.2 I use a related analytic result to test the convergence of the radial function expansion. The function  $\tilde{g}_i$  can be projected onto an  $(\ell m)$  spherical harmonic,

$$\langle g_i | \ell m \rangle \equiv \int d\Omega Y_{\ell m}(\hat{u}) g_i(\mathbf{u}) = \frac{\sqrt{2}}{\sqrt{\pi}\sigma_i^3} Y_{\ell m}(\hat{u}_i) \exp\left(-\frac{u^2 + u_i^2}{2\sigma_i^2}\right) i_\ell^{(1)}\left(\frac{u_i u}{\sigma_i^2}\right). \quad (\text{D.15})$$

This is an analytic function of the radial coordinate  $u$ , and the gaussian parameters  $(\mathbf{u}_i, \sigma_i)$ . By comparing the second and third terms of

$$\langle g | \ell m \rangle = \sum_{n=0}^{\infty} \langle g | n \ell m \rangle |n\rangle = \sum_i c_i \langle g_i(\mathbf{u}_i, \sigma_i) | \ell m \rangle, \quad (\text{D.16})$$

for any function  $g$  given as a sum of gaussians, Eq. (D.15) can be used to check the local convergence for any basis of radial functions.

For the global convergence, the distributional energy  $\mathcal{E}$  is a useful reference. For a gaussian function, integrated to  $u \rightarrow \infty$ , the total  $\mathcal{E}$  is simply

$$\mathcal{E}[g] = \sum_{i,j} \frac{c_i c_j}{8\pi^3 \sigma_i^3 \sigma_j^3} \int d^3u \exp\left(-\frac{|\mathbf{u} - \mathbf{u}_i|^2}{2\sigma_i^2} - \frac{|\mathbf{u} - \mathbf{u}_j|^2}{2\sigma_j^2}\right), \quad (\text{D.17})$$

$$= \sum_{i,j} \frac{c_i c_j}{(2\pi)^{3/2} (\sigma_i^2 + \sigma_j^2)^{3/2}} \exp\left(\frac{u_{ij}^2}{2\sigma_{ij}^2} - \frac{u_i^2}{2\sigma_i^2} - \frac{u_j^2}{2\sigma_j^2}\right), \quad (\text{D.18})$$

where  $\sigma_{ij}$  and  $\mathbf{u}_{ij}$  are defined for each  $(i, j)$  as

$$\sigma_{ij}^2 \equiv \frac{\sigma_i^2 \sigma_j^2}{\sigma_i^2 + \sigma_j^2}, \quad \mathbf{u}_{ij} \equiv \frac{\sigma_j^2 \mathbf{u}_i + \sigma_i^2 \mathbf{u}_j}{\sigma_i^2 + \sigma_j^2}. \quad (\text{D.19})$$

## Derivatives For Wavelet Extrapolation

When the radial function  $r_n(u)$  is a higher-order wavelet, with a base of support  $\Delta u$  small enough that the integrand of Eq. (5.23) is well approximated by a Taylor series, then  $\langle g_i | n \ell m \rangle$  can be found using the extrapolation method of Section 3.2. The cubic method uses the first three derivatives of the radial function  $\langle g | \ell m \rangle$  to approximate all of the high- $n$   $\langle g | n \ell m \rangle$  coefficients. In the generic case, these derivatives are inferred from  $\langle g | (\lambda_* \mu_*) \ell m \rangle$  and its two  $\lambda_* + 1$  descendent wavelets. Here, given the analytic form for  $\langle g | \ell m \rangle$ , the derivatives can be calculated directly, noting from Eq. (D.3) that

$$\frac{d}{dz} i_\ell^{(1)}(z) = i_{\ell+1}^{(1)}(z) + \frac{\ell}{z} i_\ell^{(1)}(z). \quad (\text{D.20})$$

Writing the results in terms of  $x \equiv u/(\sqrt{2}\sigma_i)$ ,  $x_i \equiv u_i/(\sqrt{2}\sigma_i)$ :

$$g_{i,\ell m}(u) \equiv \langle g_i | \ell m \rangle = \mathcal{Y}_{i,\ell m} e^{-x^2} i_\ell^{(1)}(2x_i x), \quad \mathcal{Y}_{i,\ell m} \equiv \sqrt{\frac{2}{\pi}} \frac{Y_{\ell m}(\hat{u}_i) e^{-x_i^2}}{\sigma_i^3}, \quad (\text{D.21})$$

$$\frac{dg_{i,\ell m}}{du} = \frac{\mathcal{Y}_{i,\ell m}}{\sqrt{2}\sigma_i} e^{-x^2} \left\{ 2x_i i_{\ell+1}^{(1)}(2x_i x) + \left( \frac{\ell}{x} - 2x \right) i_{\ell}^{(1)}(2x_i x) \right\}, \quad (\text{D.22})$$

$$\begin{aligned} \frac{d^2 g_{i,\ell m}}{du^2} = \frac{\mathcal{Y}_{i,\ell m}}{2\sigma_i^2} e^{-x^2} & \left\{ (2x_i)^2 i_{\ell+2}^{(1)}(2x_i x) + \left[ \frac{2\ell+1}{x} - 4x \right] (2x_i) i_{\ell+1}^{(1)}(2x_i x) \right. \\ & \left. + \left[ \frac{\ell(\ell-1)}{x^2} - 2(2\ell+1) + 4x^2 \right] i_{\ell}^{(1)}(2x_i x) \right\} \end{aligned} \quad (\text{D.23})$$

$$\begin{aligned} \frac{d^3 g_{i,\ell m}}{du^3} = \frac{\mathcal{Y}_{i,\ell m}}{2^{3/2}\sigma_i^3} e^{-x^2} & \left\{ (2x_i)^3 i_{\ell+3}^{(1)}(2x_i x) + 3 \left[ \frac{\ell+1}{x} - 2x \right] (2x_i)^2 i_{\ell+2}^{(1)}(2x_i x) \right. \\ & + 3 \left[ \frac{\ell^2}{x^2} - 4(\ell+1) + 4x^2 \right] (2x_i) i_{\ell+1}^{(1)}(2x_i x) \\ & \left. + \left[ \frac{\ell(\ell-1)(\ell-2)}{x^3} - \frac{6\ell^2}{x} + 12x(\ell+1) - 8x^3 \right] i_{\ell}^{(1)}(2x_i x) \right\}. \end{aligned} \quad (\text{D.24})$$

This result can be used together with Eq. (3.22) to approximate the values of  $\langle g_i | n\ell m \rangle$  for wavelets  $|n\rangle$  narrow enough that the cubic Taylor series for  $g_{i,\ell m}$  is accurate.

## E Timing Information

From Eq. (1.20), and the argument that matrix multiplication is easier than multidimensional numerical integration, it is clear that the wavelet-harmonic integration method should reduce the computation time by orders of magnitude for a direct detection analysis. In this appendix, I provide some specific results for the evaluation times of each part of the vector space calculation. While substantial effort was made to simplify the analytic parts of the calculation (e.g. deriving the gaussian basis  $\mathcal{G}_{n\ell}$  method of Appendix D), very little effort was made to optimize the numeric implementation. Nothing was parallelized, even though the vector space calculation is massively parallelizable; the Python implementation `vsdm` uses relatively slow methods for combining vectors and arrays; and the method for evaluating spherical harmonics fails to take advantage of the iterative relations of the modified Legendre polynomials, so that the evaluation of  $Y_{\ell_{\max}, m}$  could in principle be used to find all  $Y_{\ell < \ell_{\max}, m}$  essentially for free. For these reasons (and perhaps others I have overlooked), it is likely that a couple more orders of magnitude of improvement could be coaxed out of the numeric implementation. The evaluation times listed in this section come from running `vsdm` in a Jupyter notebook on a personal computer.

For the  $\ell_{\max} = 36$  analysis with  $g_\chi$  and  $f_s^2$  from Section 4, it takes roughly 30 cpu-hours to evaluate  $\langle f_s^2 | n\ell m \rangle$  for the 18240 coefficients  $\ell \leq 36$ ,  $n < 96$  (with even  $\ell$  and even  $m \geq 0$ ), for a relative precision goal of  $10^{-3}$  for each coefficient. Using the  $\mathcal{G}_{n\ell}$  method, on the other hand, it took the same computer less than 30 minutes to evaluate the  $2.63 \times 10^5$  coefficients of  $\langle g_\chi | n\ell m \rangle$  with  $n < 192$  and all  $\ell \leq 36$ , for all  $|m| \leq \ell$ , with better than  $10^{-3}$  precision. The relative improvement becomes even more extreme at higher  $\ell$ : the number of  $\mathcal{G}_{n\ell}$  coefficients scales as  $n_{\max} \ell_{\max}$ , a small fraction of the total number of  $\langle f | n\ell m \rangle$  coefficients,  $N_{\text{coeffs}} \propto n_{\max} \ell_{\max}^2$ .

### E.1 Partial Scattering Rate Matrix

Once  $g_\chi$  and  $f_s^2$  have been projected onto their respective vector spaces, no further numerical integration is needed. However, the evaluation of the partial rate matrices  $K^{(\ell)}$  may be nontrivial. Every  $(\ell, m, m')$  entry is given by a double sum over indices  $n_v < n_{\max}^{(v)}$  and  $n_q < n_{\max}^{(q)}$ , with each

$\Delta\mathcal{E}/\mathcal{E}$	$N_v$	$N_q$	$\ell_{\max}$	$T_{\text{eval}.I}$	$T_{\text{eval}.K}$
10%: sparse:	1430	220	24	–	1–13 s
dense:				12–300 s	0.1 s
3%: sparse:	3060	610	32	–	5–90 s
dense:				20–660 s	0.2 s
1%: sparse:	5230	1440	36	–	20–450 s
dense:				25–930 s	0.5 s
0.3%: sparse:	8480	3260	36	–	75–2100 s
dense:				25–930 s	0.5 s
$\Delta\mathcal{E} \rightarrow 0$	all	all	36	25–930 s	0.8 s

Table 1: The partial rate matrix  $K^{(\ell)}$  was calculated for all  $\ell \leq \ell_{\max}$  in four examples, each using the  $N_{v,q}$  most important coefficients to meet the precision goals  $\Delta\mathcal{E}/\mathcal{E} = 10\%$ ,  $3\%$ ,  $1\%$  and  $0.3\%$ . Each row provides  $T_{\text{eval}.K}$  from the sparse and dense array versions of the calculation; only the latter version calculates the full  $\mathcal{I}^{(\ell)}$  matrix. The fifth example,  $\Delta\mathcal{E} \rightarrow 0$ , applies the dense array sum to the entire set of  $N_q = 18240$ ,  $N_v = 262848$  coefficients (“all”). When  $T_{\text{eval}.I}$  is provided as a range, the upper and lower limits correspond to the cases  $m_\chi = 100$  MeV and  $m_\chi = 1$  MeV, respectively. For  $T_{\text{eval}.K}$ , the 10 MeV and 100 MeV examples are essentially identical; but for  $T_{\text{eval}.I}$ , a 10 MeV model takes intermediate values of 200s, 440s and 620s for the 10%, 3% and  $\leq 1\%$  examples, respectively. Two versions of  $F_{\text{DM}} \propto 1/q^n$  were used,  $n = 0$  and  $n = 2$ , with no impact on the evaluation time.

term in the sum calling the analytic function  $\mathcal{I}_{n,n'}^{(\ell)}(m_\chi, F_{\text{DM}})$ . Assembling the  $\ell$ th partial rate matrix (for all  $m, m'$ ) calls for up to  $(2\ell + 1)^2 n_{\max}^{(v)} n_{\max}^{(q)}$  evaluations of  $\mathcal{I}_{n,n'}^{(\ell)}$  for each DM particle model  $(m_\chi, F_{\text{DM}})$ . Many of these coefficients are irrelevantly small, and some time can be saved by dropping them from the sum. Whether or not it is faster to use a sparse version of the Eq. (2.23) sum depends on how many of the coefficients can be skipped, and this depends in turn on the precision goal.

So, there is a “dense array” method for finding  $K^{(\ell)}$ , where  $\mathcal{I}^{(\ell)}$  is evaluated as a precursor to  $K^{(\ell)}$ ; and a “sparse array” method, where  $K^{(\ell)}$  is found by evaluating Eq. (2.23) for only the most important pairs of  $\langle g_\chi | n\ell m \rangle$  and  $\langle f_s^2 | n'\ell m' \rangle$  coefficients. To determine which method is more efficient, I performed the sparse sum analysis using the  $N_v$  and  $N_q$  largest coefficients of  $|g_\chi\rangle$  and  $|f_s^2\rangle$ , for four versions of  $N_{v,q}$  chosen to match the precision goals  $\Delta\mathcal{E}/\mathcal{E} \approx 10\%$ ,  $3\%$ ,  $1\%$ , and  $0.3\%$ . The evaluation time,  $T_{\text{eval}.K}$ , depends on how close  $m_\chi$  is to the kinematic threshold,  $m_\chi > 2\Delta E/v_{\max}^2$ . For  $m_\chi = 1$  MeV, most elements of  $\mathcal{I}^{(\ell)}$  vanish trivially: the velocity required to excite the system to the  $\Delta E \simeq 4$  eV final state is  $v > 850$  km/s, where  $g_\chi$  has very little support. It is relatively fast to evaluate  $\mathcal{I}^{(\ell)}$  for the handful of nonzero coefficients. By  $m_\chi \geq 10$  MeV, on the other hand,  $T_{\text{eval}.K}$  loses its  $m_\chi$  dependence, asymptoting to the larger value listed in Table 1. The lower end of each range corresponds to  $m_\chi \simeq 1$  MeV, while the upper value usually applies for  $m_\chi \sim 10$ – $1000$  MeV.

In the “dense array” method, the calculation of  $\mathcal{I}^{(\ell)}$  adds  $T_{\text{eval}.I}$  to the evaluation time for each DM model, but streamlines the rest of the  $K^{(\ell)}$  calculation. The coefficients of  $K_{mm'}^{(\ell)}$  are generated by multiplying vectors of  $\langle g_\chi | n\ell m \rangle$  (with fixed  $\ell, m$ ) and  $\langle f_s^2 | n'\ell m' \rangle$  (of fixed  $\ell, m'$ ) against the  $\mathcal{I}_{nn'}^{(\ell)}$  matrix. This procedure is marginally faster when most of these coefficients are set to zero, but  $T_{\text{eval}.K}$  depends less strongly on  $N_{v,q}$ . It does depend strongly on  $\ell_{\max}$ : the number of operations to evaluate all  $K^{(\ell)}$  matrices scales as  $\ell_{\max}^3 n_{\max}^{(v)} n_{\max}^{(q)}$ .

In contexts where precision much better than  $10^{-3}$  is required, the vectors  $|g_\chi\rangle$  and  $|f_s^2\rangle$  must be expanded to (much) larger values of  $n_{\max}$ . The wavelet extrapolation methods of Section 3.2 would extend  $n_{\max}$  to  $2^k n_{\max}$  for some power of  $k$ ; alternatively, the  $k$ th order polynomial method suggested in Section 5.5 would achieve equivalent accuracy with only  $kn_{\max}$  coefficients per  $(\ell, m)$  harmonic. In either case, the evaluation times for a high-precision calculation can be estimated by scaling the  $T_{\text{eval}}$  in Table 1 according to:

$$T_{\text{eval}.K} \propto \ell_{\max}^3 n_{\max}^{(v)} n_{\max}^{(q)}, \quad T_{\text{eval}.I} \propto \ell_{\max} n_{\max}^{(v)} n_{\max}^{(q)}. \quad (\text{E.1})$$

Returning to the Eq. (1.19) notation, an analysis with  $N_{g_\chi}$  velocity distributions,  $N_{f_s}$  detector models, and  $N_{\text{DM}}$  dark matter particle models takes

$$T_{\text{total}}^K = N_{\text{DM}} (T_{\text{eval}.I} + T_{\text{eval}.K} \cdot N_{g_\chi} \cdot N_{f_s}) \quad (\text{E.2})$$

to evaluate all of the  $K^{(\ell)}$  matrices at the specified level of precision. The  $T_{\text{eval}.I}$  term is only present for the dense array version of the calculation. From Table 1, it is clear that the dense array version is much faster whenever  $N_{g_\chi} N_{f_s} \gg 1$ . Even when  $N_{g_\chi} N_{f_s} = 1$ , the sparse array approach is only faster for the relatively low precision examples, where  $\Delta\mathcal{E}/\mathcal{E} \gtrsim 1\%$ .

So, in the limit of large  $N_{g_\chi}$  and  $N_{f_s}$ , the partial rate matrices can be assembled for every combination of models in less than  $N_{g_\chi} N_{f_s} N_{\text{DM}}$  seconds, even in the case where precision on the order of  $10^{-3}$  is needed. Once this has been completed, the only remaining step of the calculation is to evaluate the scattering rate itself, by multiplying  $K^{(\ell)}$  by a Wigner  $G^{(\ell)}$  matrix and taking the trace.

## E.2 Rotations

When the scattering rate depends on the orientation of the detector, the analysis must be repeated for some list of  $N_{\mathcal{R}}$  rotations  $\mathcal{R} \in SO(3)$ . Evaluating the  $\mathcal{G}^{(\ell)}(\mathcal{R})$  matrices adds

$$T_{\text{total}}^G = N_{\mathcal{R}} \cdot T_{\text{eval}.G} \quad (\text{E.3})$$

to the total evaluation time. Like  $K^{(\ell)}$ , the total number of coefficients scales as  $\ell_{\max}^3$ ; unlike  $K$ , the evaluation time for  $G$  is independent of the number of models in the analysis. Consequently,  $T_{\text{total}}^G$  takes up a relatively small part of the evaluation time, unless  $N_{\mathcal{R}}$  is especially large (e.g.  $N_{\mathcal{R}} \gtrsim 10^5$ ).

The average evaluation time for  $G^{(\ell)}(\mathcal{R})$  is summarized in the table below for various  $\ell_{\max}$ , using the `spherical` Python package to evaluate the Wigner  $D^{(\ell)}$  matrix, and Eq. (A.14) to find  $G^{(\ell)}$ :

$\ell_{\max}$ :	12	24	36
$T_{\text{eval}.G}$ :	0.02 s	0.15 s	0.48 s

(E.4)

As expected,  $T_{\text{eval}.G} \propto \ell_{\max}^3$ . The  $T_{\text{eval}.G}$  listed above include all even and odd values of  $\ell \leq \ell_{\max}$ . In cases where  $g_\chi$  or  $f_s^2$  is invariant under a  $\mathbb{Z}_2$  central inversion symmetry, the odd values of  $\ell$  can be dropped, reducing the evaluation time by a factor of 2.

At this stage,  $K^{(\ell)}$  and  $G^{(\ell)}$  have been evaluated for every possibility in the analysis, and the only thing left to do is combine them. From Eq. (2.24), the event rate in the detector target is:

$$R(g_\chi, f_s^2, m_\chi, F_{\text{DM}}, \mathcal{R}) = \frac{k_0}{T_{\text{exp}}} \sum_{\ell=0}^{\ell_{\max}} \text{Tr} \left( G^{(\ell)}(\mathcal{R}) \cdot [K^{(\ell)}(g_\chi, f_s^2, m_\chi, F_{\text{DM}})]^T \right). \quad (\text{E.5})$$

This trace must be evaluated once for every point in the analysis, i.e.  $N_{\mathcal{R}}N_{\text{DM}}N_{g_{\chi}}N_{f_s}$  many times, adding

$$T_{\text{total}}^{\text{Tr}} = N_{\mathcal{R}}N_{\text{DM}}N_{g_{\chi}}N_{f_s} \cdot T_{\text{eval.Tr}} \quad (\text{E.6})$$

to the total evaluation time. Calculating the trace is very fast, typically requiring fractions of a millisecond. For three values of  $\ell_{\text{max}}$ :

$\ell_{\text{max}}$ :	12	24	36
$T_{\text{Tr}}$ :	0.07 ms	0.16 ms	0.33 ms

(E.7)

These averages were calculated using the same set of 1000 randomly selected rotations  $\mathcal{R}$  for various DM models, including only even values of  $\ell$  in the trace.  $T_{\text{Tr}}$  does not depend on the value of  $m_{\chi}$  or the  $F_{\text{DM}}$  scaling.

If the vector space versions of  $|g_{\chi}\rangle$  and  $|f_s^2\rangle$  are not known at the start of the calculation, then the calculation of  $\langle f_s^2 | n\ell m \rangle$  and  $\langle g_{\chi} | n\ell m \rangle$  adds

$$T_{\text{total}}^{\text{proj}} = N_{g_{\chi}}T_{\text{proj.V}} + N_{f_s}T_{\text{proj.Q}} \quad (\text{E.8})$$

to the total evaluation time, where  $T_{\text{proj.V,Q}}$  is the time to project one model of  $g_{\chi}$  or  $f_s^2$  onto the  $V$  or  $Q$  vector space. Unless  $N_{\text{DM}}$  is extremely large, this is usually the most time-consuming aspect of the calculation. In the Section 4 examples,  $T_{\text{proj.Q}} \sim 30$  hours, while the  $\mathcal{G}_{nl}$  gaussian basis trick permits  $T_{\text{proj.V}} < 15$  min when neglecting even  $\ell$ .

In conclusion, a complete analysis (starting without pre-evaluated  $|g_{\chi}\rangle$  and  $|f_s^2\rangle$ ) can be completed in a time:

$$T_{\text{total}} = T_{\text{total}}^K + T_{\text{total}}^G + T_{\text{total}}^{\text{Tr}} + T_{\text{total}}^{\text{proj}}. \quad (\text{E.9})$$

This should be compared to the current standard, which requires

$$T_{\text{total}}^{\text{slow}} = N_{\mathcal{R}}N_{\text{DM}}N_{g_{\chi}}N_{f_s} \times T(\text{multidimensional numeric integration}). \quad (\text{E.10})$$

In previous analyses [24,36] this type of integral might require tens of minutes to achieve comparable accuracy.

### E.3 Comparison: Direct Integration

To compare the wavelet-harmonic integration with the standard approach of Section 1.2, I calculate the rate  $R$  directly from Eq. (1.5), using the  $\delta$  function to reduce the 6d integral into five dimensions:  $\mathbf{q}$ ,  $v_x$  and  $v_y$ . For simplicity I used Cartesian coordinates within a rectangular box, bounded by  $|q_i| \leq 10 \alpha m_e$  and  $|v_i| \leq 960$  km/s for  $i = x, y, z$ .

Aside from the fact that  $g_{\chi}(\mathbf{v})$  is not isotropic in any rest frame (so the Eq. (1.12) method cannot be used to replace  $g_{\chi}(\mathbf{v})$  with  $g(\mathbf{q})$ ), the analytic expression for  $f_s^2(\mathbf{q})$  makes the Section 4 demonstration one of the simplest test cases. Even so, numeric integration is rather expensive. Using the same Monte Carlo integrator (**vegas** in Python) that was used to find  $|g_{\chi}\rangle$  and  $|f_s^2\rangle$ , the integration time as a function of the precision goal is approximately:

	1%	0.3%	0.1%
$T_{\text{int.}}$ :	40 s	300 s	600 s

(E.11)

In cases where  $f_s^2(\mathbf{q})$  must be found from some other numerical method, it may be evaluated on a grid of  $\mathbf{q}$  and saved. Integrating Eq. (1.5) then requires some interpolation of the  $f_s^2(\mathbf{q})$  grid, so the evaluation time may be noticeably slower (while also requiring much more computer memory).

# References

- [1] B. Lillard, “Vector space integration for dark matter scattering,” *to be published concurrently* (2023) .
- [2] A. K. Drukier, K. Freese, and D. N. Spergel, “Detecting Cold Dark Matter Candidates,” *Phys. Rev. D* **33** (1986) 3495–3508.
- [3] K. Freese, J. A. Frieman, and A. Gould, “Signal Modulation in Cold Dark Matter Detection,” *Phys. Rev. D* **37** (1988) 3388–3405.
- [4] J. I. Collar and F. T. Avignone, “Diurnal modulation effects in cold dark matter experiments,” *Phys. Lett. B* **275** (1992) 181–185.
- [5] F. Hasenbalg, D. Abriola, F. T. Avignone, J. I. Collar, D. E. Di Gregorio, A. O. Gattone, H. Huck, D. Tomasi, and I. Urteaga, “Cold dark matter identification: Diurnal modulation revisited,” *Phys. Rev. D* **55** (1997) 7350–7355, [arXiv:astro-ph/9702165](#).
- [6] F. T. Avignone, III, R. J. Creswick, and S. Nussinov, “Searching direction dependent daily modulation in dark matter detectors,” [arXiv:0807.3758 \[hep-ph\]](#).
- [7] S. K. Lee, M. Lisanti, S. Mishra-Sharma, and B. R. Safdi, “Modulation Effects in Dark Matter-Electron Scattering Experiments,” *Phys. Rev. D* **92** no. 8, (2015) 083517, [arXiv:1508.07361 \[hep-ph\]](#).
- [8] J. Diemand, M. Kuhlen, P. Madau, M. Zemp, B. Moore, D. Potter, and J. Stadel, “Clumps and streams in the local dark matter distribution,” *Nature* **454** (2008) 735–738, [arXiv:0805.1244 \[astro-ph\]](#).
- [9] A. Klypin, S. Trujillo-Gomez, and J. Primack, “Halos and galaxies in the standard cosmological model: results from the Bolshoi simulation,” *Astrophys. J.* **740** (2011) 102, [arXiv:1002.3660 \[astro-ph.CO\]](#).
- [10] J. Guedes, S. Callegari, P. Madau, and L. Mayer, “Forming Realistic Late-Type Spirals in a LCDM Universe: The Eris Simulation,” *Astrophys. J.* **742** (2011) 76, [arXiv:1103.6030 \[astro-ph.CO\]](#).
- [11] P. F. Hopkins *et al.*, “FIRE-2 Simulations: Physics versus Numerics in Galaxy Formation,” *Mon. Not. Roy. Astron. Soc.* **480** no. 1, (2018) 800–863, [arXiv:1702.06148 \[astro-ph.GA\]](#).
- [12] M. Kuhlen, M. Lisanti, and D. N. Spergel, “Direct Detection of Dark Matter Debris Flows,” *Phys. Rev. D* **86** (2012) 063505, [arXiv:1202.0007 \[astro-ph.GA\]](#).
- [13] L. Necib, M. Lisanti, S. Garrison-Kimmel, A. Wetzel, R. Sanderson, P. F. Hopkins, C.-A. Faucher-Giguère, and D. Kereš, “Under the Firelight: Stellar Tracers of the Local Dark Matter Velocity Distribution in the Milky Way,” [arXiv:1810.12301 \[astro-ph.GA\]](#).
- [14] A. H. Riley *et al.*, “The velocity anisotropy of the Milky Way satellite system,” *Mon. Not. Roy. Astron. Soc.* **486** no. 2, (2019) 2679–2694, [arXiv:1810.10645 \[astro-ph.GA\]](#).

- [15] R. Catena, “Dark matter directional detection in non-relativistic effective theories,” *JCAP* **07** (2015) 026, [arXiv:1505.06441 \[hep-ph\]](#).
- [16] Y. Hochberg, Y. Kahn, M. Lisanti, C. G. Tully, and K. M. Zurek, “Directional detection of dark matter with two-dimensional targets,” *Phys. Lett. B* **772** (2017) 239–246, [arXiv:1606.08849 \[hep-ph\]](#).
- [17] R. Budnik, O. Chesnovsky, O. Slone, and T. Volansky, “Direct Detection of Light Dark Matter and Solar Neutrinos via Color Center Production in Crystals,” *Phys. Lett. B* **782** (2018) 242–250, [arXiv:1705.03016 \[hep-ph\]](#).
- [18] Y. Hochberg, Y. Kahn, M. Lisanti, K. M. Zurek, A. G. Grushin, R. Ilan, S. M. Griffin, Z.-F. Liu, S. F. Weber, and J. B. Neaton, “Detection of sub-MeV Dark Matter with Three-Dimensional Dirac Materials,” *Phys. Rev. D* **97** no. 1, (2018) 015004, [arXiv:1708.08929 \[hep-ph\]](#).
- [19] A. Coskuner, A. Mitridate, A. Olivares, and K. M. Zurek, “Directional Dark Matter Detection in Anisotropic Dirac Materials,” *Phys. Rev. D* **103** no. 1, (2021) 016006, [arXiv:1909.09170 \[hep-ph\]](#).
- [20] R. M. Geilhufe, F. Kahlhoefer, and M. W. Winkler, “Dirac Materials for Sub-MeV Dark Matter Detection: New Targets and Improved Formalism,” *Phys. Rev. D* **101** no. 5, (2020) 055005, [arXiv:1910.02091 \[hep-ph\]](#).
- [21] S. M. Griffin, Y. Hochberg, K. Inzani, N. Kurinsky, T. Lin, and T. Chin, “Silicon carbide detectors for sub-GeV dark matter,” *Phys. Rev. D* **103** no. 7, (2021) 075002, [arXiv:2008.08560 \[hep-ph\]](#).
- [22] A. Coskuner, T. Trickle, Z. Zhang, and K. M. Zurek, “Directional detectability of dark matter with single phonon excitations: Target comparison,” *Phys. Rev. D* **105** no. 1, (2022) 015010, [arXiv:2102.09567 \[hep-ph\]](#).
- [23] S. Sassi, A. Dinmohammadi, M. Heikinheimo, N. Mirabolfathi, K. Nordlund, H. Safari, and K. Tuominen, “Solar neutrinos and dark matter detection with diurnal modulation,” *Phys. Rev. D* **104** no. 6, (2021) 063037, [arXiv:2103.08511 \[hep-ph\]](#).
- [24] C. Blanco, Y. Kahn, B. Lillard, and S. D. McDermott, “Dark Matter Daily Modulation With Anisotropic Organic Crystals,” *Phys. Rev. D* **104** (2021) 036011, [arXiv:2103.08601 \[hep-ph\]](#).
- [25] C. Blanco, I. Harris, Y. Kahn, B. Lillard, and J. Pérez-Ríos, “Molecular Migdal effect,” *Phys. Rev. D* **106** no. 11, (2022) 115015, [arXiv:2208.09002 \[hep-ph\]](#).
- [26] C. Boyd, Y. Hochberg, Y. Kahn, E. D. Kramer, N. Kurinsky, B. V. Lehmann, and T. C. Yu, “Directional detection of dark matter with anisotropic response functions,” [arXiv:2212.04505 \[hep-ph\]](#).
- [27] M. Heikinheimo, S. Sassi, K. Tuominen, K. Nordlund, and N. Mirabolfathi, “Anisotropic ionization threshold and directional sensitivity in solid state DM detectors,” in *14th International Workshop on the Identification of Dark Matter 2022*. 10, 2022. [arXiv:2210.01557 \[hep-ph\]](#).

- [28] R. Catena, T. Emken, M. Matas, N. A. Spaldin, and E. Urdshals, “Direct searches for general dark matter-electron interactions with graphene detectors: Part I. Electronic structure calculations,” [arXiv:2303.15497 \[hep-ph\]](#).
- [29] R. Catena, T. Emken, M. Matas, N. A. Spaldin, and E. Urdshals, “Direct searches for general dark matter-electron interactions with graphene detectors: Part II. Sensitivity studies,” [arXiv:2303.15509 \[hep-ph\]](#).
- [30] A. Dinmohammadi, M. Heikinheimo, N. Mirabolfathi, K. Nordlund, H. Safari, S. Sassi, and K. Tuominen, “Daily and annual modulation rate of low mass dark matter in silicon detectors,” [arXiv:2301.06592 \[hep-ph\]](#).
- [31] **DarkSide** Collaboration, P. Agnes *et al.*, “Constraints on Sub-GeV Dark-Matter–Electron Scattering from the DarkSide-50 Experiment,” *Phys. Rev. Lett.* **121** no. 11, (2018) 111303, [arXiv:1802.06998 \[astro-ph.CO\]](#).
- [32] **XENON** Collaboration, E. Aprile *et al.*, “Dark Matter Search Results from a One Ton-Year Exposure of XENON1T,” *Phys. Rev. Lett.* **121** no. 11, (2018) 111302, [arXiv:1805.12562 \[astro-ph.CO\]](#).
- [33] **SuperCDMS** Collaboration, R. Agnese *et al.*, “First Dark Matter Constraints from a SuperCDMS Single-Charge Sensitive Detector,” *Phys. Rev. Lett.* **121** no. 5, (2018) 051301, [arXiv:1804.10697 \[hep-ex\]](#). [Erratum: *Phys.Rev.Lett.* 122, 069901 (2019)].
- [34] **PICO** Collaboration, C. Amole *et al.*, “Dark Matter Search Results from the Complete Exposure of the PICO-60 C<sub>3</sub>F<sub>8</sub> Bubble Chamber,” *Phys. Rev. D* **100** no. 2, (2019) 022001, [arXiv:1902.04031 \[astro-ph.CO\]](#).
- [35] **DAMIC** Collaboration, A. Aguilar-Arevalo *et al.*, “Constraints on Light Dark Matter Particles Interacting with Electrons from DAMIC at SNOLAB,” *Phys. Rev. Lett.* **123** no. 18, (2019) 181802, [arXiv:1907.12628 \[astro-ph.CO\]](#).
- [36] C. Blanco, J. I. Collar, Y. Kahn, and B. Lillard, “Dark Matter-Electron Scattering from Aromatic Organic Targets,” *Phys. Rev. D* **101** no. 5, (2020) 056001, [arXiv:1912.02822 \[hep-ph\]](#).
- [37] **SENSEI** Collaboration, L. Barak *et al.*, “SENSEI: Direct-Detection Results on sub-GeV Dark Matter from a New Skipper-CCD,” *Phys. Rev. Lett.* **125** no. 17, (2020) 171802, [arXiv:2004.11378 \[astro-ph.CO\]](#).
- [38] **EDELWEISS** Collaboration, Q. Arnaud *et al.*, “First germanium-based constraints on sub-MeV Dark Matter with the EDELWEISS experiment,” *Phys. Rev. Lett.* **125** no. 14, (2020) 141301, [arXiv:2003.01046 \[astro-ph.GA\]](#).
- [39] **PandaX-II** Collaboration, C. Cheng *et al.*, “Search for Light Dark Matter-Electron Scatterings in the PandaX-II Experiment,” *Phys. Rev. Lett.* **126** no. 21, (2021) 211803, [arXiv:2101.07479 \[hep-ex\]](#).
- [40] **XENON** Collaboration, E. Aprile *et al.*, “Search for New Physics in Electronic Recoil Data from XENONnT,” *Phys. Rev. Lett.* **129** no. 16, (2022) 161805, [arXiv:2207.11330 \[hep-ex\]](#).



- [41] **LZ** Collaboration, J. Aalbers *et al.*, “First Dark Matter Search Results from the LUX-ZEPLIN (LZ) Experiment,” [arXiv:2207.03764 \[hep-ex\]](#).
- [42] **XENON** Collaboration, E. Aprile *et al.*, “First Dark Matter Search with Nuclear Recoils from the XENONnT Experiment,” [arXiv:2303.14729 \[hep-ex\]](#).
- [43] **DAMIC-M** Collaboration, I. Arnquist *et al.*, “First Constraints from DAMIC-M on Sub-GeV Dark-Matter Particles Interacting with Electrons,” *Phys. Rev. Lett.* **130** no. 17, (2023) 171003, [arXiv:2302.02372 \[hep-ex\]](#).
- [44] Y. Wu, K. Freese, C. Kelso, P. Stengel, and M. Valluri, “Uncertainties in Direct Dark Matter Detection in Light of Gaia’s Escape Velocity Measurements,” *JCAP* **10** (2019) 034, [arXiv:1904.04781 \[hep-ph\]](#).
- [45] A. Radick, A.-M. Taki, and T.-T. Yu, “Dependence of Dark Matter - Electron Scattering on the Galactic Dark Matter Velocity Distribution,” *JCAP* **02** (2021) 004, [arXiv:2011.02493 \[hep-ph\]](#).
- [46] M. R. Buckley, S. H. Lim, E. Putney, and D. Shih, “Measuring Galactic Dark Matter through Unsupervised Machine Learning,” [arXiv:2205.01129 \[astro-ph.GA\]](#).
- [47] S. Knapen, J. Kozaczuk, and T. Lin, “Dark matter-electron scattering in dielectrics,” *Phys. Rev. D* **104** no. 1, (2021) 015031, [arXiv:2101.08275 \[hep-ph\]](#).
- [48] S. Knapen, J. Kozaczuk, and T. Lin, “python package for dark matter scattering in dielectric targets,” *Phys. Rev. D* **105** no. 1, (2022) 015014, [arXiv:2104.12786 \[hep-ph\]](#).
- [49] S. M. Griffin, K. Inzani, T. Trickle, Z. Zhang, and K. M. Zurek, “Extended calculation of dark matter-electron scattering in crystal targets,” *Phys. Rev. D* **104** no. 9, (2021) 095015, [arXiv:2105.05253 \[hep-ph\]](#).
- [50] P. J. Fox, G. D. Kribs, and T. M. P. Tait, “Interpreting Dark Matter Direct Detection Independently of the Local Velocity and Density Distribution,” *Phys. Rev. D* **83** (2011) 034007, [arXiv:1011.1910 \[hep-ph\]](#).
- [51] P. J. Fox, J. Liu, and N. Weiner, “Integrating Out Astrophysical Uncertainties,” *Phys. Rev. D* **83** (2011) 103514, [arXiv:1011.1915 \[hep-ph\]](#).
- [52] P. Gondolo and G. B. Gelmini, “Halo independent comparison of direct dark matter detection data,” *JCAP* **12** (2012) 015, [arXiv:1202.6359 \[hep-ph\]](#).
- [53] B. J. Kavanagh, “Parametrizing the local dark matter speed distribution: a detailed analysis,” *Phys. Rev. D* **89** no. 8, (2014) 085026, [arXiv:1312.1852 \[astro-ph.CO\]](#).
- [54] B. Feldstein and F. Kahlhoefer, “A new halo-independent approach to dark matter direct detection analysis,” *JCAP* **08** (2014) 065, [arXiv:1403.4606 \[hep-ph\]](#).
- [55] M. Chen, G. B. Gelmini, and V. Takhistov, “Halo-independent analysis of direct dark matter detection through electron scattering,” *JCAP* **12** no. 12, (2021) 048, [arXiv:2105.08101 \[hep-ph\]](#).

- [56] M. Chen, G. B. Gelmini, and V. Takhistov, “Halo-independent dark matter electron scattering analysis with in-medium effects,” *Phys. Lett. B* **841** (2023) 137922, [arXiv:2209.10902 \[hep-ph\]](#).
- [57] A. H. G. Peter, “WIMP astronomy and particle physics with liquid-noble and cryogenic direct-detection experiments,” *Phys. Rev. D* **83** (2011) 125029, [arXiv:1103.5145 \[astro-ph.CO\]](#).
- [58] A. H. G. Peter, V. Gluscevic, A. M. Green, B. J. Kavanagh, and S. K. Lee, “WIMP physics with ensembles of direct-detection experiments,” *Phys. Dark Univ.* **5-6** (2014) 45–74, [arXiv:1310.7039 \[astro-ph.CO\]](#).
- [59] S. K. Lee, “Harmonics in the Dark-Matter Sky: Directional Detection in the Fourier-Bessel Basis,” *JCAP* **03** (2014) 047, [arXiv:1401.6179 \[astro-ph.CO\]](#).
- [60] A.-M. Legendre, “Recherches sur l’attraction des sphéroïdes homogènes,” *Histoire de l’Académie Royale des Sciences* (1783).
- [61] A. Haar, “Zur Theorie der orthogonalen Funktionensysteme,” *Math. Ann.* **69** (1910) 331–371.
- [62] J. D. Lewin and P. F. Smith, “Review of mathematics, numerical factors, and corrections for dark matter experiments based on elastic nuclear recoil,” *Astropart. Phys.* **6** (1996) 87–112.
- [63] R. Essig, J. Mardon, and T. Volansky, “Direct Detection of Sub-GeV Dark Matter,” *Phys. Rev. D* **85** (2012) 076007, [arXiv:1108.5383 \[hep-ph\]](#).
- [64] R. Essig, M. Fernandez-Serra, J. Mardon, A. Soto, T. Volansky, and T.-T. Yu, “Direct Detection of sub-GeV Dark Matter with Semiconductor Targets,” *JHEP* **05** (2016) 046, [arXiv:1509.01598 \[hep-ph\]](#).
- [65] T. Trickle, Z. Zhang, K. M. Zurek, K. Inzani, and S. M. Griffin, “Multi-Channel Direct Detection of Light Dark Matter: Theoretical Framework,” *JHEP* **03** (2020) 036, [arXiv:1910.08092 \[hep-ph\]](#).
- [66] R. A. Fisher, “On the Mathematical Foundations of Theoretical Statistics,” *Phil. Trans. Roy. Soc. Lond. A* **222** (1922) 309–368.
- [67] B. G. Lillard, T. Plehn, A. Romero, and T. M. P. Tait, “Multi-scale Mining of Kinematic Distributions with Wavelets,” *SciPost Phys.* **8** no. 3, (2020) 043, [arXiv:1906.10890 \[hep-ph\]](#).
- [68] D. Levin, “Procedures for computing one- and two-dimensional integrals of functions with rapid irregular oscillations,” *Math. Comp.* **38** (1982) 531–538.
- [69] I. Daubechies, *Ten Lectures on Wavelets*. SIAM, 1992.
- [70] G. Domokos, “Four-Dimensional Symmetry,” *Phys. Rev.* **159** no. 5, (1967) 1387.
- [71] M. Viviani, A. Kievsky, and S. Rosati, “Calculation of the alpha-particle ground state within the hyperspherical harmonic basis,” *Phys. Rev. C* **71** (2005) 024006, [arXiv:nucl-th/0408019](#).

- [72] M. Abramowitz and I. A. Stegun, *Handbook of Mathematical Functions with Formulas, Graphs, and Mathematical Tables*. Dover Publications, 1972.