

# Error Control Codes: A Novel Solution for Secret Key Generation and Key Refreshment Problem

Arjun Puri

Assistant Professor, Baba Ghulam Shah Badshah University, Rajouri , Jammu and Kashmir.

Sudesh Kumar

Assistant Professor, Shri Mata Vaishno Devi University, Katra, Jammu and Kashmir

## ABSTRACT

Cryptography is the science of encrypting the information so that it is rendered unreadable for an intruder. Cryptographic techniques are of utmost importance in today's world as the information to be sent might be of invaluable importance to both the sender and the receiver. Various cryptographic techniques ensure that even if an intruder intercepts the sent information, he is not able to decipher it thus rendering it useless for the intruder. Cryptography can be grouped into two types, that is Symmetric key cryptography and Asymmetric key cryptography. Symmetric key cryptography uses the same key for encryption as well as decryption thus making it faster compared to Asymmetric Key cryptography which uses different keys for encryption and decryption. Generation of dynamic keys for Symmetric key cryptography is an interesting field and in this we have tapped this field so as to generate dynamic keys for symmetric key cryptography. In this work, we have devised an algorithm for generating dynamic keys for sending messages over a communication channel and also solving key refreshment problem.

## Keywords

RS codes (Reed Solomon codes), ARQ (Automatic Repeat Request), DES (Data Encryption Standard).

## 1. INTRODUCTION

In communication, one of the main aspects is to send message correctly from sender to receiver. In order to achieve this, coding theory comes into picture that takes the responsibility of sending data correctly over noisy channel. There are mainly two types of coding theory one is forward error correction and another is backward error correction or automatic repeat request (ARQ). Another main duty of data communication with the advent of time is to provide security of the message to be sent. In order to send message securely, cryptography is most widely used. Cryptography is derived from two Greek words "*crypto*" which means secret and "*graphy*" which means writing. So this is known as secret writing. Cryptography is now an emerging research area where the scientists are trying to develop some good algorithms, for encryption and decryption which are hard to break by third body. Symmetric cryptography is also referred to as single key or shared key cryptography because only one key is used between sender and receiver in order to encrypt and decrypt the message. Symmetric key was developed in 1970. In Symmetric key cryptography plaintext can be encrypted by two ways: stream cipher and block cipher [1]. There are two major tasks involved in symmetric cryptography one is to generate key and another is to distribute key. In this paper we proposed an algorithm to generate key with the help of forward error correction codes. In order to achieve this, we have used Reed Solomon codes for the generation of key which in turn is used to encrypt message in cipher form. This

paper is divided into following subsections:-related work, proposed work, implementation, conclusion and future work.

## 2. RELATED WORK

In [1], authors deal with a new symmetric key cryptographic method using dynamic key. In their work, they have used the Linear Congruential Generator (LCG) for generating key. They suggested the use of Linear Congruential Generator (LCG) for generating key. The advantage of the method is that every time new key is generated. So the process is very hard to break. The proposed algorithm is also compared with the other algorithms and it is concluded that performance of proposed algorithm is higher than other algorithms.

In [3], authors gave a novel approach to generate key based on face features. Traditional cryptographic methods require the user to remember keys. Thus it requires lot of storage space. So the concept of generating biometric key emerge which is much more secure as compared to traditional cryptographic method. In this paper, authors proposed biometric cryptosystem based on face biometric. At this phase, 128-dimensional principal component analysis (PCA) feature vector is firstly extracted from the face image and a 128 bit binary vector is obtained by thresholding. After that authors select the distinguishable bits to form bio-key and the optimal bit order number is saved in a look-up table. Finally they provide error correction by applying of Reed Solomon algorithm. The message is encrypted by using DES with bio-key. The proposed algorithm shows that the entropy of this algorithm is maximum and performance of this algorithm is better than other algorithm.

In [2] author suggests a new approach to protect the message by the application of symmetric cryptographic check values as message authentication code, over noise channel. In this method author introduce concept of hard verification of message authentication code.

In [4], author suggested that it is impossible to store all keys in case of large network. A natural solution then is to supply each user with a relatively small amount of secret data from which he can derive all his keys. In this paper he main emphases on the use of MDS codes.

In [5], authors explore a unique approach to generation of key using fingerprint. The generated key is used as an input key to the DES Algorithm. The algorithm is successfully implemented and tested in Matlab. The paper also describes some of the commonly used technique for generation and extraction of minutiae points from fingerprint.

In [6], an implementation of the technique Matrix Embedding using the Reed-Solomon codes is obtained. The advantage of these codes is that they allow easy way to solve the problem of bounded syndrome decoding, a problem which is the basis of the technique of embedding matrix. The use of the technique of matrix embedding in the steganography makes it


possible to minimize the changes introduced into the image of cover.

In [7], presents the implementation of Elliptic Curve Cryptography by first transforming the message (text and image) into an affine point on the Elliptic Curve over the finite prime field. The process of encryption of a text and image message and then a method for enhancing security using Forward Error Correction code for better error checking at the receiver side. This enables errors or noise added during transmission to be detected and corrected so that the receiver is receiving correct data and the received data matches with the sent data.

### 3. PROPOSED WORK

In the present scenario of cryptography, one of the important issues is to generate dynamic key because it is not possible all the time to store large amount of keys in order to secure communication. So it is important for us to generate keys dynamically. Key generation usually depends upon two major aspects:-Key stability and Key entropy. Key stability refers to the extent to which the key generated from the algorithm is repeatable. Key entropy refers to the numbers of dynamically generated keys.

These two factors are inversely propositional to each other. As we go on increasing Key stability, key Entropy goes on decreasing and vice-versa. In our present work we propose, “A Symmetric key generation model using forward error correction codes”. In our proposed work we are generating keys with the help of one of the forward error codes. The proposed algorithm is given below:-

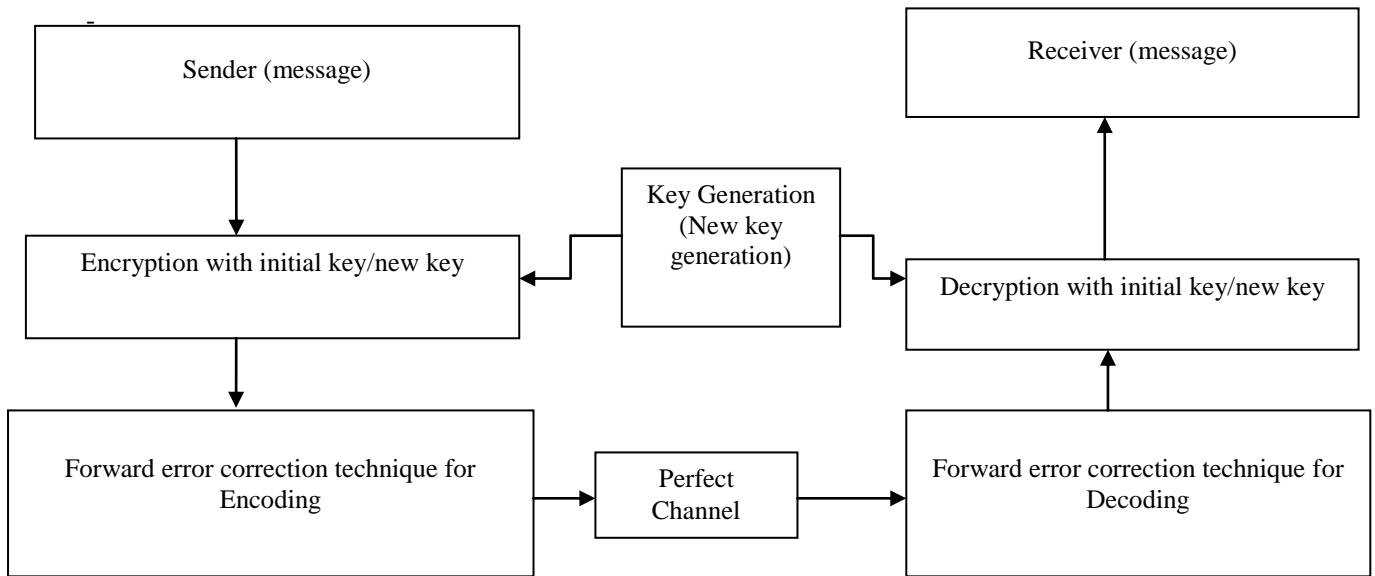


**Figure 1: - Proposed Model**

In first block, it takes plain text variable length from the user and converts it into ASCII code value and transfers to encryption. In encryption block, it is divided into small chunks and encryption is done along with key generation methods. After encryption, message will be converted into cipher text form. This whole process is performed at sender side. After that decryption is performed at receiving end. In

decryption block, cipher text is converted into plaintext. At plain text of variable length, receives message in a confidential way.

To begin with, in key generation block we are trying to generate a new key for encryption. This is done by adding the initial key with message parity check matrix of forward error correction. The block diagram of the process is shown below:-

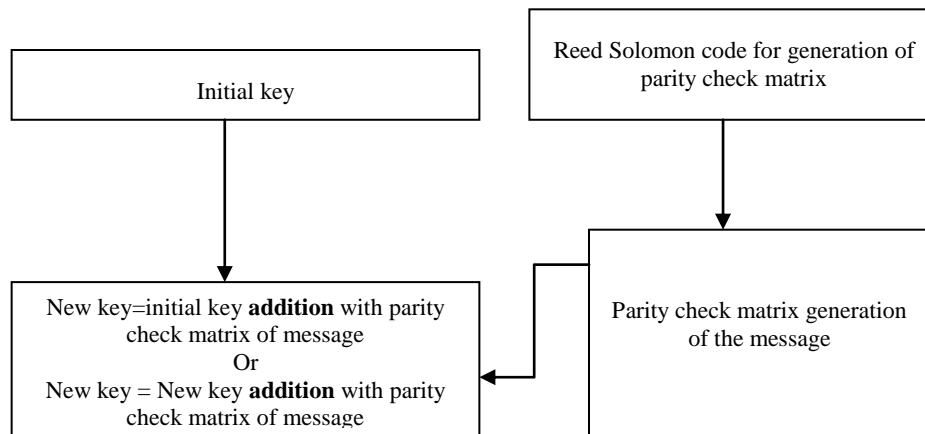

**Figure 2:-Key Generation Block**

#### 4. PROPOSED ALGORITHM

##### Algorithm for key generation at sender side:-

Step1: Check (length (input message)>63) then

Step2: Break it into message\_chunks of 63 bits.

Then take individual chunks.

Step3: Take first chunks and perform encryption

Step4: [Encrypt] = input message + initial key

Step5: Perform RS encoding.

Step6: Extract Parity check matrix of first encoded message.

Step7: New key= initial key + parity check matrix of first message (used for encryption of second message and also perform RS encoding).

Step8: New key= new key + parity check matrix of second message (used for encryption of third message and also perform RS encoding).

And so on.

##### Algorithm for key generation at receiver side:-

Step1: Receive individual encoded chunks.

Step2: S= separate parity check matrix and store it for further decryption.

Step3: Take encrypted chunks from encoded chunk.

Step4: Then perform first decryption by using initial key.

Step5: After take further decryption of chunks by using algorithm

Step6: Msg= encrypt- initial key

Step7: For further Msg=encrypt- new key

Where new key= initial key+ parity check matrix of first chunk

OR

New key=new key+ parity check matrix

And so on.

#### 5. IMPLEMENTATION

The proposed work is implemented in Matlab. In implementation we have taken a message of length 63 characters and Reed Solomon code of size (127, 63). Input message having length greater than 63 is inputted to the system and its corresponding key which is used for encryption and decryption is generated at both ends as shown in figure 2 above. Firstly input message is converted into their respective ASCII code value then first chunk encryption is performed by using initial key after that further encryption is performed by generating keys from parity check matrix of the message and initial key. One example is shown as below:

##### Input message

In our simulation we took the following message “*rajasthan university and shri mata vaishno devi university are two good university in india*”. The intermediate calculations carried out by the system is shown below

##### ASCII code

a =

Columns 1 through 27

114	97	106	97	115	116	104	97	110	32	117
110	105	118	101	114	115	105	116	121	32	97
110	100	32	115	104						

Columns 28 through 54

114	105	32	109	97	116	97	32	118	97	105	115
104	110	111	32	100	101	118	105	32	117	110	
105	118	101	114								

Columns 55 through 81

115	105	116	121	32	97	114	101	32	116	119
111	32	103	111	111	100	32	117	110	105	118
101	114	115	105	116						

Columns 82 through 92

121	32	105	110	32	105	110	100	105	97	46
-----	----	-----	-----	----	-----	-----	-----	-----	----	----

##### Initial key:

in = GF(2<sup>7</sup>) array. Primitive polynomial = D<sup>7</sup>+D<sup>3</sup>+1 (137 decimal)

Array elements =

Columns 1 through 13

12	4	5	6	7	3	3	5
6	4	4	6	7			

Columns 14 through 26

4	3	5	6	6	7	7	2
4	2	2	5	4			

Columns 27 through 39

6	7	3	3	2	6	7	8
7	8	8	8	9			

Columns 40 through 52

9	4	7	1	7	9	4	5
9	0	2	5	9			

Columns 53 through 63

0	3	5	6	2	6	3	0
1	5	3					

##### Encryption of first message chunk:

encry1 = GF(2<sup>7</sup>) array. Primitive polynomial = D<sup>7</sup>+D<sup>3</sup>+1 (137 decimal)

Array elements =

Columns 1 through 13

126	101	111	103	116	119	107
100	104	36	113	104	110	

Columns 14 through 26

114	102	119	117	111	115	126
34	101	108	102	37	119	

Columns 27 through 39

110	117	106	35	111	103	115
105	39	126	105	97	122	

Columns 40 through 52

97 106 104 33 99 108 114  
108 41 117 108 108 127

Columns 53 through 63

101 113 118 111 118 127 35  
97 115 96 35

**RS Encoding of first message chunk:**

Code1 = GF(2<sup>7</sup>) array. Primitive polynomial = D<sup>7</sup>+D<sup>3</sup>+1 (137 decimal)

Array elements =

Columns 1 through 13

126 101 111 103 116 119 107  
100 104 36 113 104 110

Columns 14 through 26

114 102 119 117 111 115 126  
34 101 108 102 37 119

Columns 27 through 39

110 117 106 35 111 103 115  
105 39 126 105 97 122

Columns 40 through 52

97 106 104 33 99 108 114  
108 41 117 108 108 127

Columns 53 through 65

101 113 118 111 118 127 35  
97 115 96 35 112 37

Columns 66 through 78

36 92 90 82 123 31 99  
21 33 41 95 109 101

Columns 79 through 91

100 26 95 19 93 78 86  
105 18 13 123 91 96

Columns 92 through 104

116 38 43 119 22 11 74  
46 10 0 54 79 43

Columns 105 through 117

80 48 52 108 2 105 76  
2 6 21 6 36 102

Columns 118 through 127

8 11 97 24 22 4 58 101  
58 65

**RS decoding of first message chunk:**

decode1 = GF(2<sup>7</sup>) array. Primitive polynomial = D<sup>7</sup>+D<sup>3</sup>+1 (137 decimal)

Array elements =

Columns 1 through 13

126 101 111 103 116 119 107  
100 104 36 113 104 110

Columns 14 through 26

114 102 119 117 111 115 126  
34 101 108 102 37 119

Columns 27 through 39

110 117 106 35 111 103 115  
105 39 126 105 97 122

Columns 40 through 52

97 106 104 33 99 108 114  
108 41 117 108 108 127

Columns 53 through 63

101 113 118 111 118 127 35  
97 115 96 35

**First Message chunk at receiver end:**

msg1 = GF(2<sup>7</sup>) array. Primitive polynomial = D<sup>7</sup>+D<sup>3</sup>+1 (137 decimal)

Array elements =

Columns 1 through 13

114 97 106 97 115 116 104  
97 110 32 117 110 105

Columns 14 through 26

118 101 114 115 105 116 121  
32 97 110 100 32 115

Columns 27 through 39

104 114 105 32 109 97 116  
97 32 118 97 105 115

Columns 40 through 52

104 110 111 32 100 101 118  
105 32 117 110 105 118

Columns 53 through 63

101 114 115 105 116 121 32  
97 114 101 32

**New key generated:**

key1 = GF(2<sup>7</sup>) array. Primitive polynomial = D<sup>7</sup>+D<sup>3</sup>+1 (137 decimal)

Array elements =

Columns 1 through 13

124 33 33 90 93 81 120  
26 101 17 37 47 88

Columns 14 through 26

105 102 97 28 89 20 90  
76 82 107 16 8 127

Columns 27 through 39

93 103 119 37 41 113 17  
3 77 38 2 8 63

Columns 40 through 52

70 47 87 49 51 101 6  
108 69 2 4 16 15

Columns 53 through 63

36 101 13 13 99 30 21  
4 59 96 57

**Encryption of second message chunk:**

ency2 = GF(2<sup>7</sup>) array. Primitive polynomial = D<sup>7</sup>+D<sup>3</sup>+1 (137 decimal)

Array elements =

Columns 1 through 13

8	86	78	122	58	62	23
126	69	100	75	70	46	

Columns 14 through 26

12	20	18	117	45	109	122
37	60	75	121	102	27	

Columns 27 through 39

52	6	89	37	41	113	17
3	77	38	2	8	63	

Columns 40 through 52

70	47	87	49	51	101	6
108	69	2	4	16	15	

Columns 53 through 63

36	101	13	13	99	30	21
4	59	96	57			

**RS encoding of second message chunk:**

Code2 = GF(2<sup>7</sup>) array. Primitive polynomial = D<sup>7</sup>+D<sup>3</sup>+1 (137 decimal)

Array elements =

Columns 1 through 13

8	86	78	122	58	62	23
126	69	100	75	70	46	

Columns 14 through 26

12	20	18	117	45	109	122
37	60	75	121	102	27	

Columns 27 through 39

52	6	89	37	41	113	17
3	77	38	2	8	63	

Columns 40 through 52

70	47	87	49	51	101	6
108	69	2	4	16	15	

Columns 53 through 65

36	101	13	13	99	30	21
4	59	96	57	94	14	

Columns 66 through 78

111	123	43	3	99	76	76
54	76	37	6	15	104	

Columns 79 through 91

97	23	103	33	0	70	71
23	106	26	50	29	85	

Columns 92 through 104

3	71	33	0	95	78	34	125
53	1	32	50	112			

Columns 105 through 117

9	38	49	67	56	84	23	45
127	51	51	29	33			

Columns 118 through 127

47	16	10	10	118	71	79
60	13	124				

**RS decoding of second chunk at receiver end:**

decode2 = GF(2<sup>7</sup>) array. Primitive polynomial = D<sup>7</sup>+D<sup>3</sup>+1 (137 decimal)

Array elements =

Columns 1 through 13

8	86	78	122	58	62	23
126	69	100	75	70	46	

Columns 14 through 26

12	20	18	117	45	109	122
37	60	75	121	102	27	

Columns 27 through 39

52	6	89	37	41	113	17
3	77	38	2	8	63	

Columns 40 through 52

70	47	87	49	51	101	6
108	69	2	4	16	15	

Columns 53 through 63

36	101	13	13	99	30	21
4	59	96	57			

**6. CONCLUSION & FUTURE WORK**

In this paper, a novel key generation algorithm with the help of forward error correction technique is implemented. In analysis, Reed Solomon code for the generation of dynamic keys is used. While performing this operation, it is noticed that it is very difficult to break generated key because every time there are different key sequences generated. The proposed work provides a solution towards symmetric key cryptography key generation problem. In addition, key refreshment problem is also solved by the suggested techniques with very little efforts. For the simulation purpose in the analysis chunks of block size was taken (127, 63).

In future, researcher can extend and evaluate the proposed work in the following ways:

- a) Performance Evaluation with different encryption algorithm
- b) Enhancing Robustness through Various Error Control Codes.

## **7. REFERENCES**

- [1] Zeenat Mahmood, J. L Rana, Prof. Ashish khare, “Symmetric Key Cryptography using Dynamic Key and Linear Congruential Generator (LCG)”, *International Journal of Computer Applications (0975 – 8887)* Volume 50– No.19, July 2012
- [2] Zivic Natasa, “Iterative Method for Correction of Messages protected by Symmetric Cryptographic Check Values”, *International Conference on Information Networking*, 2012.
- [3] Lifang Wu, Xingsheng Liu, Songlong Yuan, Peng Xiso, “A Novel Key Generation Cryptosystem Based on Face Features”, *ICSP 2010 Proceedings*.
- [4] Rolf Blom, "An optimal class of symmetric key generation systems", *Advances in Cryptology - EUROCRYPT '84, LNCS 209*, pp. 335-338, 1985, Springer-Verlag Berlin Heidelberg 1985.
- [5] Rupam Kumar Sharma , “Generation of Biometric Key for use in DES” , *IJCSI International Journal of Computer Science Issues*, Vol. 9, Issue 6, No 1, November 2012.
- [6] I.Diop; S .M Farssi; O. Kouma; H. B Diouf; K .Tall; K .Sylla, “New Steganographic scheme based of Reed-Solomon codes”, *International Journal of Distributed and Parallel Systems (IJDPS)* Vol.3, No.2, March 2012.
- [7] Aanchal Aggarwal, Sunita Sangwan, Simerpreet kaur , “Enhancing Robustness of EC Cryptic Data using Forward Error Correction” , *International Journal of Engineering and Innovative Technology (IJEIT)* Volume 2, Issue 1, July 2012.
- [8] Yahya S. Khiabani, Shuangqing Wei , “Design and Analysis of an ARQ Based Symmetric Key Generation Algorithm” , 2011 military operation conference- track 3- cyber security and network operations.
- [9] F.Ayoub and K.Singh, “Cryptographic techniques and network security”, *IEEE Proceedings*, Vol.131, Pt.F, No.7, DECEMBER 1984.
- [10] S. Kalaiselvi , Prof. S. Jabeen Begum , “A secure group communication using non-interactive key computation in multiparty key agreement” , *Proceedings of the 2008 International Conference on Computing , Communication and Networking (ICCCN2008)*.