

Solving Distance-constrained Labeling Problems for Small Diameter Graphs via TSP*

Tesshu Hanaka

Department of Informatics
Kyushu University
Fukuoka, Japan
hanaka@inf.kyushu-u.ac.jp

Hiroataka Ono

Department of Mathematical Informatics
Nagoya University
Nagoya, Japan
ono@nagoya-u.jp

Kosuke Sugiyama

Department of Mathematical Informatics
Nagoya University
Nagoya, Japan
sugiyama.kousuke.k3@s.mail.nagoya-u.ac.jp

Abstract—For an undirected graph $G = (V, E)$ and a k -non-negative integer vector $\mathbf{p} = (p_1, \dots, p_k)$, a mapping $l: V \rightarrow \mathbb{N} \cup \{0\}$ is called an $L(\mathbf{p})$ -labeling of G if $|l(u) - l(v)| \geq p_d$ for any two distinct vertices $u, v \in V$ with distance d , and the maximum value of $\{l(v) \mid v \in V\}$ is called the span of l . Originally, $L(\mathbf{p})$ -labeling of G for $\mathbf{p} = (2, 1)$ is introduced in the context of frequency assignment in radio networks, where ‘close’ transmitters must receive different frequencies and ‘very close’ transmitters must receive frequencies that are at least two frequencies apart so that they can avoid interference. $L(\mathbf{p})$ -LABELING is the problem of finding the minimum span $\lambda_{\mathbf{p}}$ among $L(\mathbf{p})$ -labelings of G , which is NP-hard for every non-zero \mathbf{p} . $L(\mathbf{p})$ -LABELING is well studied for specific \mathbf{p} ’s; in particular, many (exact or approximation) algorithms for general graphs or restricted classes of graphs are proposed for $\mathbf{p} = (2, 1)$ or more generally $\mathbf{p} = (p, q)$. Unfortunately, most algorithms strongly depend on the values of \mathbf{p} , and it is not apparent to extend algorithms for \mathbf{p} to ones for another \mathbf{p} ’ in general. In this paper, we give a simple polynomial-time reduction of $L(\mathbf{p})$ -LABELING on graphs with a small diameter to METRIC (PATH) TSP, which enables us to use numerous results on (METRIC) TSP. On the practical side, we can utilize various high-performance heuristics for TSP, such as Concorde and LKH, to solve our problem. On the theoretical side, we can see that the problem for any \mathbf{p} under this framework is 1.5-approximable, and it can be solved by the Held-Karp algorithm in $O(2^n n^2)$ time, where n is the number of vertices, and so on.

Index Terms—Frequency Assignment, Distance-constrained Labeling, $L(p_1, \dots, p_k)$ -Labeling, TSP, Graph Diameter, Parameterized Complexity

I. INTRODUCTION

For an undirected graph G with n vertices and m edges, and a k -nonnegative integer vector $\mathbf{p} = (p_1, \dots, p_k)$, a mapping $l: V \rightarrow \mathbb{N} \cup \{0\}$ is an $L(\mathbf{p})$ -labeling of G if $|l(u) - l(v)| \geq p_d$ for any two distinct vertices $u, v \in V$ with distance d , the maximum value of $\{l(v) \mid v \in V\}$ is called the span of l . The notion of $L(\mathbf{p})$ -labeling for $\mathbf{p} = (2, 1)$ can be seen in Hale [18] and Roberts [30] in the context of frequency assignment in radio networks, where ‘close’ transmitters must receive different frequencies and ‘very close’ transmitters must receive frequencies that are at least two frequencies apart so that they can avoid interference. $L(\mathbf{p})$ -LABELING is the problem of finding the minimum span $\lambda_{\mathbf{p}}$ among $L(\mathbf{p})$ -labelings of

G , which is NP-hard for every non-zero \mathbf{p} . Since $L(\mathbf{p})$ -LABELING for $k = 1$ is the ordinary coloring problem, the cases of $k \geq 2$ are essential to study $L(\mathbf{p})$ -LABELING under its name. In particular, the problem for $\mathbf{p} = (p_1, p_2) = (p, q)$ is called the $L(p, q)$ -LABELING problem and intensively and extensively studied.

Among infinite settings of (p, q) , probably $L(2, 1)$ -LABELING is most studied. It is shown that $L(2, 1)$ -LABELING is NP-hard even for restricted classes of graphs, such as planar graphs, bipartite graphs, chordal graphs [6], graphs with diameter 2 [17], and graphs of tree-width 2 [13]. In contrast, only a few graph classes are known to be solvable in polynomial time. For example, $L(2, 1)$ -LABELING can be solved in polynomial time for paths, cycles, wheels [17], co-graphs, and trees [8], [21]. These algorithms are straightforward (paths, cycles, wheels) or strongly depend on the properties of graphs (co-graphs and trees). In fact, the NP-hardness for graphs of tree-width 2 implies that the polynomial-time solvability for trees (graphs of tree-width 1) depends on not a tree-like structure but the tree structure itself; it might be difficult to extend or generalize algorithms for trees to superclasses of trees. Note that the algorithm of [21] for trees is quite involved though its running time is linear. Furthermore, $L(p, q)$ -LABELING is NP-hard even for trees, if p and q do not have a common divisor.

Another direction of research for intractable problems is to design exact exponential-time algorithms whose bases or exponents are small. For example, Junosza-Szaniawski et al. [25] present an algorithm for $L(2, 1)$ -LABELING whose running time is $O(2.6488^n)$, which is currently the fastest. This algorithm uses the exponential size of memories. The current fastest exact algorithm with polynomial space for $L(2, 1)$ -LABELING is proposed by Junosza-Szaniawski et al. [26], and it runs in $O(7.4922^n)$ time. These algorithms are specialized in $L(2, 1)$ -LABELING. As more generalized algorithms, Cygan and Kowalik presented an exact algorithm for a more general labeling problem, called *channel assignment problem*. It is based on the fast zeta transform in combination with the inclusion-exclusion principle [11]. The algorithm solves $L(p, q)$ -LABELING in $O^*((\max\{p, q\} + 1)^n)$ time and $L(2, 1)$ -LABELING in $O^*(3^n)$ time, where polynomial factors are omitted in O^* notation.

*This work is partially supported by JSPS KAKENHI Grant Number JP20H05967, JP21H05852, JP21K19765, JP21K17707, JP22H00513.

In summary, $L(\mathbf{p})$ -LABELING is well studied in the fields of algorithm design, but most of the developed algorithms are tailored to \mathbf{p} and graph classes, and it is hard to generalize them.

A. Our contribution

In this paper, we address the $L(\mathbf{p})$ -LABELING problem on graphs with a small diameter, which is known to be NP-hard. Our approach is simple; we just solve the problem via TSP. Namely, our main contribution is an $O(nm)$ -time reduction from $L(\mathbf{p})$ -LABELING for graph G with diameter at most the dimension of \mathbf{p} , say k , to METRIC PATH TRAVELING SALESMAN PROBLEM (TSP) under the assumption that $p_{\max} \leq 2p_{\min}$, where $p_{\min} = \min\{p_1, \dots, p_k\}$ and $p_{\max} = \max\{p_1, \dots, p_k\}$. Note that the most well-studied setting $\mathbf{p} = (2, 1)$ satisfies this condition. Although this reduction is available only for graphs with a small diameter and \mathbf{p} satisfying the above condition, it enables us to use numerous results of (METRIC) TSP.

On the practical side, since many practical algorithms for (Metric) TSP have been developed, they can be applied to solve $L(\mathbf{p})$ -LABELING for graphs with a small diameter with a minor modification. For example, the Lin-Kernighan heuristic for symmetric TSP [29] and its variants are known to have outstanding performance, and there are several excellent implementations [1], [24]. Such implementations can be used to solve our problems as engines practically.

On the theoretical side, the reduction leads to several algorithms with performance guarantees, such as an $O(2^n n^2)$ -time algorithm and a 1.5-approximation algorithm for $L(\mathbf{p})$ -LABELING if the diameter of an input graph is at most k and if $p_{\max} \leq 2p_{\min}$. Both of the results imply that a small diameter and the setting \mathbf{p} may make the problem easier; it is only known that $L(p, q)$ -LABELING for general graphs can be solved in $O^*((\max\{p, q\} + 1)^n)$ time and be $O(\min\{\Delta, \sqrt{n} + p/q\})$ -approximable in polynomial time, where Δ is maximum degree. Particularly, in case of $k = 2$, our reduction reduces the problem (i.e., $L(p, q)$ -LABELING) to Path TSP with 2-valued edge weights, which can be solved via PARTITION INTO PATHS. Since PARTITION INTO PATH is known to be fixed-parameter tractable for modular-width [16], so is our problem. On the other hand, we point out that $L(p, q)$ -LABELING for graphs with diameter 2 is W[1]-hard for clique-width, which could show a frontier between fixed parameter (in)tractability.

In passing, we can show that $L(1, \dots, 1)$ -LABELING on general graphs is fixed-parameter tractable for modular-width. Although the parameterized complexity of $L(p, q)$ -LABELING for modular-width remains open in general, $L(\mathbf{p})$ -LABELING becomes p_{\max} -approximable in FPT time for modular-width by the FPT result for $L(1, \dots, 1)$ -LABELING.

B. Related work

1) *Distance-Constrained labeling*: The original notion of distance-constrained labeling can be seen in Hale [18] and Roberts [30] in the context of frequency assignment. In

frequency assignment, ‘close’ transmitters must receive different frequencies, and ‘very close’ transmitters must receive frequencies that are at least two frequencies apart to avoid interference. Then, Griggs and Yeh formally introduced the notion of $L(p, q)$ -labeling in [17]. Since p and q could be any natural numbers, there are infinite settings of $L(p, q)$ -labeling, but $L(2, 1)$ -labeling is most studied. One of the reasons is the context of more general frequency assignment because the setting explained above is interpreted as $L(2, 1)$ -labeling. In the context of frequency assignment, it is natural to consider the setting of $p \geq q$. Also, $q = 1$ might be natural because it decides the unit. Another reason why $L(2, 1)$ is most popular is that the setting of $p = 2$ and $q = 1$ seems the most natural and fundamental among the settings represented by $L(p, q)$ -labeling. Indeed, $L(1, 1)$ -labeling of G is equivalent to the ordinary coloring on the square of G ; we do not need to study $L(1, 1)$ -labeling itself in this name.

As introduced in the previous sections, the $L(p, q)$ -LABELING problem or specifically the $L(2, 1)$ -LABELING problem is NP-hard even for restricted classes of graphs. Thus polynomial-time algorithms for particular classes of graphs and exact exponential-time algorithms are developed. We list here other results than those mentioned before. As for approximation, $L(p, q)$ -LABELING is NP-hard to approximate within factor better than $n^{\frac{1}{2}-\epsilon}$. On the other hand, there is an asymptotically tight $O(\min\{\Delta, \sqrt{n} + p/q\})$ -approximation algorithm where Δ is the maximum degree of G [19].

For the parameterized complexity, the $L(2, 1)$ -LABELING problem is fixed-parameter tractable for vertex cover number [14], clique-width plus maximum degree, or twin cover number plus maximum clique size [20]. Although it is less critical to study $L(1, \dots, 1)$ -LABELING (we write $L(1)$ -LABELING hereafter) in this name, $L(1)$ -Labeling can be used for approximating $L(\mathbf{p})$ -LABELING; $L(1)$ -Labeling yields p_{\max} -approximation of $L(\mathbf{p})$ -Labeling, $p_{\max} = \max_{d \in [k]} p_d$. For this reason, we are interested in the complexity of $L(1)$ -LABELING or Coloring of powers of graphs. It is known that $L(1, 1)$ -LABELING is W[1]-hard for the tree-width [14], even though the ordinary Coloring is FPT, but $L(1)$ -LABELING is in XP for clique-width [31], which implies that it is in XP for tree-width. Hanaka et al. also show that $L(1, 1)$ -LABELING is fixed-parameter tractable when parameterized by twin cover number [20].

The generalized setting, $L(\mathbf{p})$, is also studied but is less popular. Bertossi and Pinotti present approximation algorithms of $L(\mathbf{p})$ -LABELING for trees and interval graphs [5]. $L(\mathbf{p})$ -LABELING is fixed-parameter tractable for the neighborhood diversity, p_{\max} , plus k [12]. Further related work for $L(\mathbf{p})$ -LABELING can be found in the following surveys [7], [22].

2) (METRIC PATH) TSP: TRAVELING SALESMAN PROBLEM (TSP) might be the most studied combinatorial optimization problem from both practical and theoretical points of view. Thus, we here list only a few of the results.

On the practical side, an enormous number of works have been devoted to developing efficient algorithms for TSP for a long time. For example, as mentioned before, implementations

of the Lin-Kernighan type algorithms [29] have outstanding performance, and it was reported even in 2003 [3] that an implementation of the chained Lin-Kernighan can constantly find near-optimal solutions for instances with 100,000 cities or more. Moreover, some implementations, such as Concorde and LKH [1], [2], are available on the Web. Developments are continuing, and improvements are still reported [33], [37].

On the theoretical side, TSP has been studied from various aspects. For example, the Held-Karp algorithm with time complexity $O^*(2^n)$ was proposed in 1962 [4], [23], and the existence of an exact algorithm with time complexity $O^*(c^n)$ for some $c < 2$ is still open [35]. For approximation, the general symmetric TSP has no approximation algorithm unless $P=NP$, whereas the METRIC TSP, which is a restricted version of TSP whose edge-weights satisfy the triangle inequality, is known to be 1.5-approximable by the Christofides algorithm [9]. Recently, this bound has been slightly improved by a randomized algorithm whose approximation ratio is at most $1.5 - 10^{-36}$ [27]. Note that our reduction is not to METRIC TSP but to METRIC PATH TSP. Naive applications of algorithms for METRIC TSP to METRIC PATH TSP do not preserve approximation guarantees, though it is shown that α -approximation algorithm for TSP can be used to obtain an $(\alpha + \varepsilon)$ -approximation solution of PATH TSP for arbitrary $\varepsilon > 0$ [34]. For METRIC PATH TSP, Zenklusen recently gives a deterministic 1.5-approximation algorithm [36]. By combining the results on [27] and [34], a randomized algorithm can obtain an approximate solution whose ratio is slightly better than 1.5.

II. PRELIMINARIES

A. Notations

Let $G = (V, E)$ be an undirected and connected graph where $n = |V|$ and $m = |E|$. The *distance* between two vertices u, v in G is denoted by $\text{dist}_G(u, v)$. The *diameter* of G is defined by $\text{diam}(G) = \max_{u, v \in V} \text{dist}_G(u, v)$. For a vertex $v \in V$, we denote by $N_G(v) = \{u \in V \mid \{u, v\} \in E\}$ the set of adjacent vertices of v in G . For a vertex subset $S \subseteq V$, $G[S]$ is defined as the subgraph induced by S . The complement graph of G is denoted by \overline{G} . Also, the k -th power of graph G is denoted by G^k . Given a positive integer k , we define $[k] = \{1, 2, \dots, k\}$. For an integer vector $\mathbf{p} = (p_1, \dots, p_k)$, we define $p_{\min} = \min\{p_1, \dots, p_k\}$ and $p_{\max} = \max\{p_1, \dots, p_k\}$. Let $\mathbf{1} = (1, \dots, 1)$ be a vector such that each element is 1.

B. Graph parameters

A vertex subset $M \subseteq V$ is a *module* of a graph G if any pair of u, v in M satisfies that $N_G(u) \setminus M = N_G(v) \setminus M$.

Definition 1 (Modular-width). *A graph $G = (V, E)$ has modular-width at most ℓ (≥ 2) if it satisfies (i) $|V| \leq \ell$, or (ii) there is a partition (V_1, \dots, V_ℓ) of V such that for each $i \in [\ell]$, V_i is a module and $G[V_i]$ has modular-width at most ℓ . The minimum ℓ such that G has modular-width at most ℓ is denoted by $\text{mw}(G)$.*

There is a polynomial-time algorithm that computes $\text{mw}(G)$ and its decomposition [32].

Definition 2 (Neighborhood diversity). *A graph $G = (V, E)$ has neighborhood diversity at most ℓ if there is a partition (V_1, \dots, V_ℓ) of V such that every pair of vertices u, v in V_i satisfies $N_G(u) \setminus \{v\} = N_G(v) \setminus \{u\}$ for each $i \in [\ell]$. The minimum ℓ is denoted by $\text{nd}(G)$.*

Note that each of V_i 's in Definition 2 is a module of G and it forms either an independent set or a clique. As with modular-width, there is a polynomial-time algorithm for computing $\text{nd}(G)$ and its partition [28].

Proposition 1. *For any graph $G = (V, E)$, $\text{mw}(G) = \text{mw}(\overline{G})$ holds.*

Proof. It is sufficient to show that if G has modular-width at most ℓ , then \overline{G} has modular-width at most ℓ . We show this claim by induction on the number of vertices n . First, if $n \leq \ell$, then both G and \overline{G} clearly satisfy condition (i), so the claim holds.

Next, assume that $n > \ell$ and that the claim holds for any graph whose number of vertices is less than n . Let (V_1, \dots, V_t) be a partition of V such that each V_i is a module and $G[V_i]$ has modular-width at most ℓ . Note that $t \leq \ell$. Then, for each pair of $u, v \in V_i$, it holds that:

$$\begin{aligned} N_{\overline{G}}(u) \setminus V_i &= (V \setminus N_G(u)) \setminus V_i \\ &= (V \setminus N_G(v)) \setminus V_i \\ &= N_{\overline{G}}(v) \setminus V_i. \end{aligned}$$

Therefore, V_i is module of \overline{G} . Furthermore, since $\overline{G}[V_i] = \overline{G[V_i]}$, $\overline{G}[V_i]$ has modular-width at most ℓ by the assumption of induction. Therefore, \overline{G} satisfies condition (ii) of Def.1. \square

Proposition 2. *For any connected graph $G = (V, E)$, $\text{nd}(G^2) \leq \text{mw}(G)$ holds, where G^2 is the second power of G .*

Proof. If $|V| \leq \text{mw}(G)$, we are done as $\text{nd}(G^2) \leq |V|$. Otherwise, consider a partition (V_1, \dots, V_ℓ) of V such that V_i is a module for each $i \in [\ell]$ where $\ell \leq \text{mw}(G)$. Since G is connected, any module is adjacent to at least one module, and vertices between two modules are completely joined; that is, for the two modules V_i and V_j , there is an edge $\{u, v\}$ between any pair of $u \in V_i$ and $v \in V_j$. Thus, the distance of each pair of vertices in a module is at most 2, and hence each module forms a clique in G^2 . Furthermore, for each pair of $u, v \in V_i$, $N_{G^2}(u) \setminus V_i = N_{G^2}(v) \setminus V_i$ follows from $N_G(u) \setminus V_i = N_G(v) \setminus V_i$. Therefore, $N_{G^2}(u) \setminus \{v\} = N_{G^2}(v) \setminus \{u\}$ holds, which implies $\text{nd}(G^2) \leq \text{mw}(G)$. \square

Finally, we introduce the clique-width $\text{cw}(G)$ of G , which is a more general graph parameter than tree-width, modular-width, and neighborhood diversity. Namely, if some problem is not in FPT for tree-width, modular-width or neighborhood diversity, it is also not in FPT for clique-width. It is defined by some tree structures like tree-width, but we omit the detailed definition in this paper. Clique-width is a well-studied graph

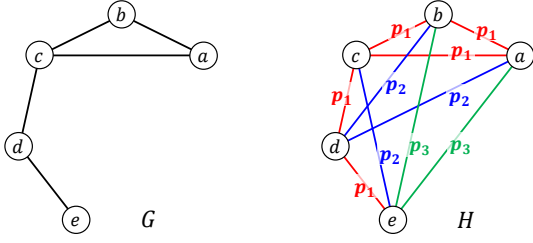


Fig. 1. The construction of H for $L(p_1, p_2, p_3)$ -LABELING on G with diameter 3.

parameter, and many results are known. For example, cographs are the graph class of clique-width at most 2. We refer readers to [10]. In order to show the $W[1]$ -hardness of $L(2, 1)$ -LABELING on graphs with diameter 2 when parameterized by clique-width in Section IV, we prove that HAMILTONIAN PATH is $W[1]$ -hard.

Theorem 1. HAMILTONIAN PATH is $W[1]$ -hard for clique-width.

Proof. We reduce HAMILTONIAN CYCLE, which is $W[1]$ -hard for clique-width [15]. Given a graph $G = (V, E)$ of clique-width $\text{cw}(G)$, pick arbitrary vertex v and add a new vertex v' that is adjacent to vertices in $N(v)$. That is, v and v' are false twins. Then we further add two vertices w, w' that are adjacent to v and v' , respectively. It is easily seen that G has a hamiltonian cycle if and only if the constructed graph G' has a hamiltonian path from w to w' . Since adding a vertex that is a false twin for some vertex to G does not change the clique-width and adding a leaf vertex increases the clique-width by at most 2, $\text{cw}(G') \leq \text{cw}(G) + 4$ holds. This completes the proof. \square

III. MAIN RESULTS

In this section, we show a polynomial-time reduction from $L(\mathbf{p})$ -LABELING to METRIC PATH TSP. PATH TSP is the problem to finding a hamiltonian path of minimum weight on an edge-weighted complete graph. Furthermore, METRIC PATH TSP is the restricted version of PATH TSP such that the edge-weights of the input graph satisfy the triangular inequality.

Theorem 2. If $p_{\max} \leq 2p_{\min}$, $L(\mathbf{p})$ -LABELING on graphs of diameter at most k can be reduced to METRIC PATH TSP in $O(nm)$ time.

Proof. First, we define an edge-weighted complete graph $H = (V, \binom{V}{2}, w)$ from an input graph G (see Figure 1). For a pair of vertices $u, v \in V$ with $\text{dist}_G(u, v) = d$, the edge weight of $\{u, v\}$ in H is defined by $w(u, v) = p_d$. Note that since $\text{diam}(G) \leq k$, $w(u, v)$ is well-defined. Furthermore, $p_{\min} \leq w(u, v) \leq 2p_{\min}$ holds by $p_d \leq 2p_{\min}$ for each $d \in [k]$, and thus w satisfies the triangle inequality.

For a permutation $\pi: V \rightarrow [n]$, we say that an $L(\mathbf{p})$ -labeling l is an $L(\mathbf{p})$ -labeling for π if it satisfies $l(\pi^{-1}(1)) \leq l(\pi^{-1}(2)) \leq \dots \leq l(\pi^{-1}(n))$. We denote by $\lambda_{\mathbf{p}}(G, \pi)$

the minimum span among all of $L(\mathbf{p})$ -labelings for π . Here, we observe that any minimum $L(\mathbf{p})$ -labelings for π satisfies $l(\pi^{-1}(1)) = 0$. If not, we obtain another labeling l' such that $l'(\pi^{-1}(i)) = l(\pi^{-1}(i)) - 1$, which contradicts the minimality of l .

Given a permutation π , let l be an $L(\mathbf{p})$ -labeling for π with minimum span $\lambda_{\mathbf{p}}(G, \pi)$ on G . In the following, we denote $v_i = \pi^{-1}(i)$ and $w_{i,j} = w(v_i, v_j)$ for simplicity. Then we show the following key claim, which implies that $l(v_i)$ is the length (sum of weights) of path (v_1, v_2, \dots, v_i) on H .

Claim 1. For the edge-weighted complete graph H , the labeling l satisfies that $l(v_i) = \sum_{t=1}^{i-1} w_{t,t+1}$ for any $i \in [n]$.

Proof. We prove the claim by induction on i . As the base case, we have that $l(v_1) = 0$. Furthermore, we consider the case of $i = 2$. Since l is a minimum $L(\mathbf{p})$ -labeling for π , it satisfies that $0 = l(v_1) \leq l(v_2) \leq \dots \leq l(v_n)$. Since $0 = l(v_1) \leq l(v_2)$, we have $l(v_2) \geq l(v_1) + p_{\text{dist}_G(v_1, v_2)} = w_{1,2}$. Moreover, $l(v_2) \leq w_{1,2}$ follows from $l(v_2) \leq \dots \leq l(v_n)$ and the minimality of l . Thus, the claim holds when $i = 2$.

In the induction step, assume that the claim holds for each $j \in [i-1]$. By the minimality of l and $l(v_1) \leq \dots \leq l(v_n)$, the label of v_i can be expressed as:

$$\begin{aligned} l(v_i) &= \min \{x \mid x \geq l(v_j) + p_{\text{dist}_G(v_j, v_i)}, \forall j \in [i-1]\} \\ &= \min \{x \mid x \geq l(v_j) + w_{j,i}, \forall j \in [i-1]\} \\ &= \max_{j \in [i-1]} \{l(v_j) + w_{j,i}\}. \end{aligned}$$

For each $j \in [i-2]$, it holds that

$$\begin{aligned} l(v_{i-1}) - l(v_j) &= \sum_{t=1}^{i-2} w_{t,t+1} - \sum_{t=1}^{j-1} w_{t,t+1} \\ &= \sum_{t=j}^{i-2} w_{t,t+1} \\ &\geq w_{i-2, i-1} \geq p_{\min}. \end{aligned}$$

Furthermore, $w_{i-1, i} - w_{j, i} \geq p_{\min} - 2p_{\min} = -p_{\min}$ holds. Thus, for any $j \in [i-2]$, we have:

$$\begin{aligned} (l(v_{i-1}) + w_{i-1, i}) - (l(v_j) + w_{j, i}) &= (l(v_{i-1}) - l(v_j)) + (w_{i-1, i} - w_{j, i}) \\ &\geq p_{\min} - p_{\min} = 0. \end{aligned}$$

Consequently, we obtain

$$\begin{aligned} l(v_i) &= \max_{j \in [i-1]} \{l(v_j) + w_{j, i+1}\} \\ &= l(v_{i-1}) + w_{i-1, i} \\ &= \sum_{t=1}^{i-1} w_{t, t+1}. \end{aligned}$$

\square

Claim 1 means that $\lambda_{\mathbf{p}}(G, \pi) = l(v_n)$ is equivalent to the length of the hamiltonian path π on H . Since $\lambda_{\mathbf{p}}(G) =$

$\min_{\pi} \{\lambda_p(G, \pi)\}$, PATH TSP on H is equivalent to $L(p)$ -LABELING on G .

Finally, we discuss the running time of the reduction. For the construction of H , we create the distance matrix of G . This can be done in $O(nm)$ time by the breadth-first search for each vertex. We then construct the weighted adjacency matrix of H from the distance matrix of G . Clearly, it can be constructed in $O(n^2)$ time. Thus, the total running time is $O(nm) + O(n^2) = O(nm)$. \square

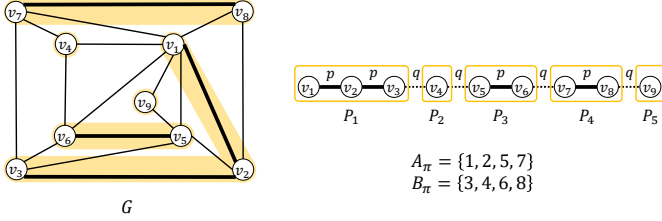


Fig. 2. Paths P_1, \dots, P_5 consisting of only edges of weight p along π correspond to paths in G .

As a corollary, we can obtain an optimal solution in $O(2^n n^2)$ time and a 1.5-approximate solution in polynomial time by applying algorithms for METRIC PATH TSP proposed in [23] and [36], respectively, after the above reduction.

Corollary 1. *If $p_{\max} \leq 2p_{\min}$, $L(p)$ -LABELING on graphs of diameter at most k can be solved in $O(2^n n^2)$ time. Furthermore, it is approximable within 1.5 in polynomial time.*

Further observation shows that our problem is fixed-parameter tractable for modular-width.

Corollary 2. *The $L(p, q)$ -LABELING problem on graphs of diameter at most 2 is fixed-parameter tractable for modular-width.*

Proof. Let G be a graph of diameter at most 2 and H be the weighted complete graph obtained from G as in Theorem 2. Notice that the weight of an edge in H is either p or q .

First, we consider the case that $p \leq q$. For a permutation π of V , we define:

$$A_{\pi} = \{i \in [n-1] \mid w_{i, i+1} = p\}$$

$$B_{\pi} = \{i \in [n-1] \mid w_{i, i+1} = q\}.$$

Note that $\{\pi^{-1}(i), \pi^{-1}(i+1)\}$ for $i \in A_{\pi}$ corresponds to an edge in E .

Since the weight of an edge in H is either p or q , the following equation holds:

$$\lambda_p(G, \pi) = \sum_{i=1}^{n-1} w_{i, i+1} = \sum_{i \in A_{\pi}} p + \sum_{i \in B_{\pi}} q$$

$$= (n-1)p + (q-p)|B_{\pi}|.$$

Therefore, we have $\lambda_p(G) = (n-1)p + (q-p) \min_{\pi} |B_{\pi}|$. Since n, p, q are constant, solving $L(p)$ -LABELING for G is equivalent to finding π that minimizes $|B_{\pi}|$ on H .

Here, let P_1, \dots, P_s be paths along π such that each P_i contains only edges with weight p (see Figure 2). Note that some P_i could be one vertex. By the definition of such paths, $s = |B_{\pi}| + 1$. We observe that edges in P_i corresponds to edges in G . Thus, minimizing $|B_{\pi}|$ on H is equivalent to the PARTITION INTO PATHS problem, which is the problem to minimize the number of paths that partition V in G . This can be computed in $f(\text{mw}(G))n^{O(1)}$ time [16].

For the case that $p > q$, we can similarly solve $L(p, q)$ -LABELING by computing PARTITION INTO PATHS on the complementary graph \bar{G} of G . Since $\text{mw}(\bar{G}) = \text{mw}(G)$ by Proposition 1, it can also be computed in $f(\text{mw}(G))n^{O(1)}$ time. \square

IV. RELATED RESULTS

In the previous section, we showed that $L(p, q)$ -LABELING is fixed-parameter tractable for modular-width on graphs of diameter 2. In this section, we first point out that $L(2, 1)$ -LABELING is W[1]-hard for clique-width even on graphs of diameter 2.

Theorem 3. *$L(2, 1)$ -LABELING on graphs with diameter 2 is W[1]-hard for clique-width.*

Proof. In [17], Griggs and Yeh give a reduction from HAMILTONIAN PATH to $L(2, 1)$ -LABELING on graphs with diameter 2. Given a graph $G = (V, E)$ as an instance of HAMILTONIAN PATH, the reduced graph of $L(2, 1)$ -LABELING is constructed by taking the complementary graph \bar{G} of G and adding a universal vertex x that is adjacent to all the vertices in V . Since $\text{cw}(\bar{G}) \leq 2\text{cw}(G)$ holds for any graph G [10] and adding a universal vertex x increases the clique-width of \bar{G} by at most 1, the clique-width of the reduced graph in [17] is at most $2\text{cw}(G) + 1$. This completes the proof. \square

Note that $L(1, 1)$ -LABELING on graphs with diameter 2 is trivially solvable because the graph power G^2 of a graph of diameter 2 is a complete graph.

The fixed-parameter tractability of $L(p, q)$ -LABELING for modular-width remains open in general. On the other hand, we show that $L(1, 1)$ -LABELING and even $L(1)$ -LABELING on general graphs are fixed-parameter tractable by modular-width in contrast to $L(p, q)$ -LABELING.

Theorem 4. *$L(1)$ -LABELING on general graphs is fixed-parameter tractable for modular-width.*

Proof. As mentioned in [12], $\text{nd}(G) \geq \text{nd}(G^k)$ holds for any graph G and any positive integer $k \geq 1$. By Proposition 2, we have $\text{mw}(G) \geq \text{nd}(G^2) \geq \text{nd}(G^k)$ for any positive integer $k \geq 2$. Also, $L(1)$ -LABELING on G is equivalent to COLORING on G^k . We know that COLORING is fixed-parameter tractable for neighborhood diversity [28]. Solving COLORING on G^k , one can compute $L(1)$ -LABELING in $f(\text{mw}(G))n^{O(1)}$ time. \square

As the corollary of Theorem 4, we obtain an FPT-approximation algorithm for $L(p)$ -LABELING with respect to modular-width.

Corollary 3. *There is a p_{\max} -approximation fixed-parameter algorithm for $L(p)$ -LABELING on general graphs with respect to modular-width.*

Proof. For any constant c , $\lambda_{cP} = c\lambda_P$ holds. Thus, we have $\lambda_P \leq \lambda_{p_{\max}1} \leq p_{\max}\lambda_1$. By Theorem 4, we obtain a p_{\max} -approximation fixed-parameter algorithm by modular-width. \square

REFERENCES

- [1] “Concorde TSP solver,” <http://www.math.uwaterloo.ca/tsp/concorde.html>, accessed: 2023-02-11.
- [2] “LKH,” <http://webhotel4.ruc.dk/~keld/research/LKH/>, accessed: 2023-02-11.
- [3] D. Applegate, W. Cook, and A. Rohe, “Chained lin-kernighan for large traveling salesman problems,” *INFORMS Journal on Computing*, vol. 15, no. 1, pp. 82–92, 2003.
- [4] R. Bellman, “Dynamic programming treatment of the travelling salesman problem,” *J. ACM*, vol. 9, no. 1, p. 61–63, jan 1962. [Online]. Available: <https://doi.org/10.1145/321105.321111>
- [5] A. A. Bertossi and C. M. Pinotti, “Approximate $(\delta_1, \delta_2, \dots, \delta_t)$ -coloring of trees and interval graphs,” *Networks: An International Journal*, vol. 49, no. 3, pp. 204–216, 2007.
- [6] H. L. Bodlaender, T. Kloks, R. B. Tan, and J. Van Leeuwen, “Approximations for λ -colorings of graphs,” *The Computer Journal*, vol. 47, no. 2, pp. 193–204, 2004.
- [7] T. Calamoneri, “The $L(h, k)$ -labelling problem: An updated survey and annotated bibliography,” *Comput. J.*, vol. 54, no. 8, pp. 1344–1371, 2011. [Online]. Available: <https://doi.org/10.1093/comjnl/bxr037>
- [8] G. J. Chang and D. Kuo, “The $L(2, 1)$ -labeling problem on graphs,” *SIAM Journal on Discrete Mathematics*, vol. 9, no. 2, pp. 309–316, 1996.
- [9] N. Christofides, “Worst-case analysis of a new heuristic for the travelling salesman problem,” Carnegie-Mellon Univ Pittsburgh Pa Management Sciences Research Group, Tech. Rep., 1976.
- [10] B. Courcelle and S. Olariu, “Upper bounds to the clique width of graphs,” *Discrete Applied Mathematics*, vol. 101, no. 1, pp. 77–114, 2000.
- [11] M. Cygan and Ł. Kowalik, “Channel assignment via fast zeta transform,” *Information Processing Letters*, vol. 111, no. 15, pp. 727–730, 2011.
- [12] J. Fiala, T. Gavenčiak, D. Knop, M. Koutecký, and J. Kratochvíl, “Parameterized complexity of distance labeling and uniform channel assignment problems,” *Discrete Applied Mathematics*, vol. 248, pp. 46–55, 2018.
- [13] J. Fiala, P. A. Golovach, and J. Kratochvíl, “Distance constrained labelings of graphs of bounded treewidth,” in *International Colloquium on Automata, Languages, and Programming*. Springer, 2005, pp. 360–372.
- [14] J. Fiala, P. A. Golovach, and J. Kratochvíl, “Parameterized complexity of coloring problems: Treewidth versus vertex cover,” *Theor. Comput. Sci.*, vol. 412, no. 23, pp. 2513–2523, 2011. [Online]. Available: <https://doi.org/10.1016/j.tcs.2010.10.043>
- [15] F. V. Fomin, P. A. Golovach, D. Lokshantov, and S. Saurabh, “Intractability of clique-width parameterizations,” *SIAM Journal on Computing*, vol. 39, no. 5, pp. 1941–1956, 2010.
- [16] J. Gajarský, M. Lampis, and S. Ordyniak, “Parameterized algorithms for modular-width,” in *International Symposium on Parameterized and Exact Computation*. Springer, 2013, pp. 163–176.
- [17] J. R. Griggs and R. K. Yeh, “Labelling graphs with a condition at distance 2,” *SIAM Journal on Discrete Mathematics*, vol. 5, no. 4, pp. 586–595, 1992.
- [18] W. K. Hale, “Frequency assignment: Theory and applications,” *Proceedings of the IEEE*, vol. 68, no. 12, pp. 1497–1514, 1980.
- [19] M. M. Halldórsson, “Approximating the $L(h, k)$ -labelling problem,” *International Journal of Mobile Network Design and Innovation*, vol. 1, no. 2, pp. 113–117, 2006.
- [20] T. Hanaka, K. Kawai, and H. Ono, “Computing $L(p, 1)$ -labeling with combined parameters,” *Journal of Graph Algorithms and Applications*, vol. 26, no. 2, pp. 241–255, 2022.
- [21] T. Hasunuma, T. Ishii, H. Ono, and Y. Uno, “A linear time algorithm for $L(2, 1)$ -labeling of trees,” *Algorithmica*, vol. 66, no. 3, pp. 654–681, 2013. [Online]. Available: <https://doi.org/10.1007/s00453-012-9657-z>
- [22] ———, “Algorithmic aspects of distance constrained labeling: a survey,” *International Journal of Networking and Computing*, vol. 4, no. 2, pp. 251–259, 2014.
- [23] M. Held and R. M. Karp, “A dynamic programming approach to sequencing problems,” *Journal of the Society for Industrial and Applied Mathematics*, vol. 10, no. 1, pp. 196–210, 1962.
- [24] K. Helsgaun, “An effective implementation of the lin-kernighan traveling salesman heuristic,” *European journal of operational research*, vol. 126, no. 1, pp. 106–130, 2000.
- [25] K. Junosza-Szaniawski, J. Kratochvíl, M. Liedloff, P. Rossmanith, and P. Rzaczewski, “Fast exact algorithm for $L(2, 1)$ -labeling of graphs,” *Theor. Comput. Sci.*, vol. 505, pp. 42–54, 2013. [Online]. Available: <https://doi.org/10.1016/j.tcs.2012.06.037>
- [26] K. Junosza-Szaniawski, J. Kratochvíl, M. Liedloff, and P. Rzaczewski, “Determining the $L(2, 1)$ -span in polynomial space,” *Discret. Appl. Math.*, vol. 161, no. 13–14, pp. 2052–2061, 2013.
- [27] A. R. Karlin, N. Klein, and S. O. Gharan, “A (slightly) improved approximation algorithm for metric tsp,” in *Proceedings of the 53rd Annual ACM SIGACT Symposium on Theory of Computing*, ser. STOC 2021. New York, NY, USA: Association for Computing Machinery, 2021, p. 32–45.
- [28] M. Lampis, “Algorithmic meta-theorems for restrictions of treewidth,” *Algorithmica*, vol. 64, no. 1, pp. 19–37, 2012.
- [29] S. Lin and B. W. Kernighan, “An effective heuristic algorithm for the traveling-salesman problem,” *Operations research*, vol. 21, no. 2, pp. 498–516, 1973.
- [30] F. S. Roberts, “ T -colorings of graphs: recent results and open problems,” *Discrete Mathematics*, vol. 93, no. 2, pp. 229–245, 1991.
- [31] K. Suchan and I. Todinca, “On powers of graphs of bounded NLC-width (clique-width),” *Discrete Applied Mathematics*, vol. 155, no. 14, pp. 1885–1893, 2007.
- [32] M. Tedder, D. Corneil, M. Habib, and C. Paul, “Simpler linear-time modular decomposition via recursive factorizing permutations,” in *International Colloquium on Automata, Languages, and Programming*. Springer, 2008, pp. 634–645.
- [33] R. Tinós, K. Helsgaun, and D. Whitley, “Efficient recombination in the lin-kernighan-helsgaun traveling salesman heuristic,” in *Parallel Problem Solving from Nature – PPSN XV*, A. Auger, C. M. Fonseca, N. Lourenço, P. Machado, L. Paquete, and D. Whitley, Eds. Cham: Springer International Publishing, 2018, pp. 95–107.
- [34] V. Traub, J. Vygen, and R. Zenklusen, “Reducing path TSP to TSP,” *SIAM Journal on Computing*, vol. 51, no. 3, pp. STOC20–24–STOC20–53, 2022.
- [35] G. J. Woeginger, *Exact Algorithms for NP-Hard Problems: A Survey*. Berlin, Heidelberg: Springer Berlin Heidelberg, 2003, pp. 185–207.
- [36] R. Zenklusen, “A 1.5-approximation for path TSP,” in *Proceedings of the thirtieth annual ACM-SIAM symposium on discrete algorithms*. SIAM, 2019, pp. 1539–1549.
- [37] Éric D. Taillard and K. Helsgaun, “POPMUSIC for the travelling salesman problem,” *European Journal of Operational Research*, vol. 272, no. 2, pp. 420–429, 2019.