


The recurrent agent generates a sequence of actions based on a target image, and successively applies them to a canvas.

Only the final canvas state after all strokes have been generated is used for adversarial training of the agent.

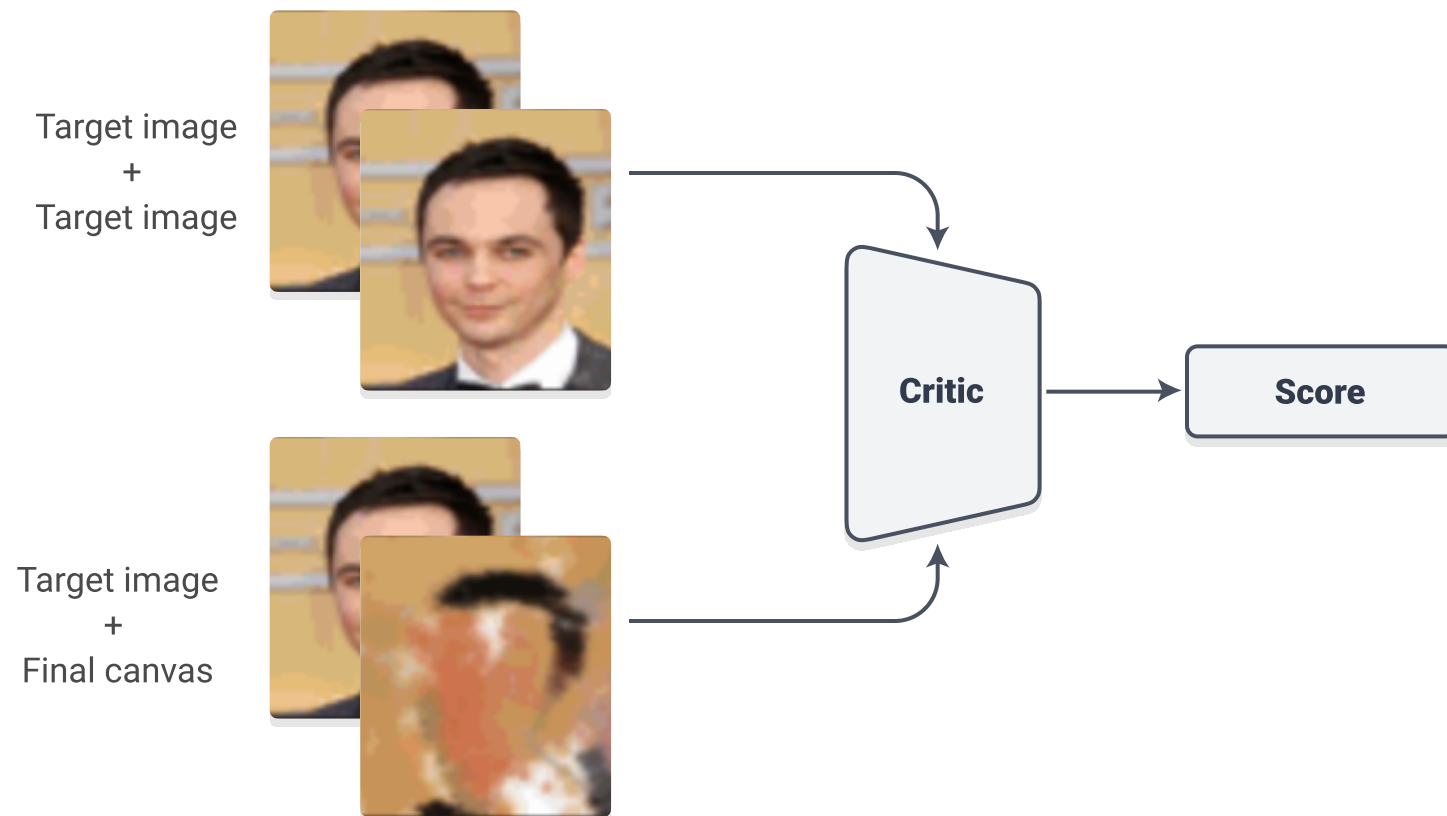

Conditioning on a target image is achieved by concatenating the target image with both itself and the final canvas state before feeding it into the critic.