


Exploratory (inference) attack


- T receives $D = h_{BT} x_B + n_T$ from B (transmitting x_B) and makes label L (idle or busy) depending on channel occupancy.
- T trains classifier C with (D, L) .
- T transmits x_T to R if $C(D) = \text{idle}$

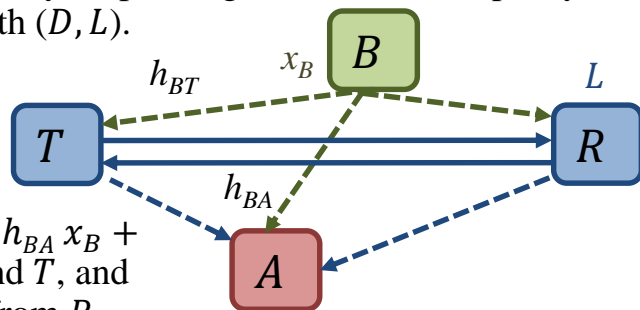

- A overhears data $D = h_{BA} x_B + h_{TA} x_T + n_A$ from B and T , and labels L (ACK or not) from R .
- A trains classifier \hat{C} with (D, L) .

Evasion attack


- T runs test data $D = h_{BT} x_B + n_T$ from B with the trained classifier to make a transmission decision.

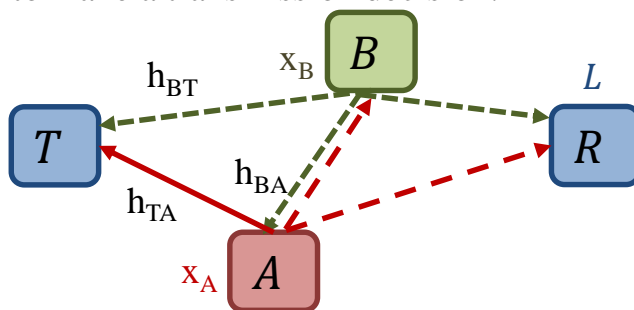

- A transmits and *changes* test data of T from $h_{BT} x_B + n_T$ to $h_{BT} x_B + h_{AT} x_A + n_T$ over the air and T makes wrong decision.

Causative (poisoning) attack

- T retrain its classifier C with training data $D = h_{BT} x_B + n_T$ from B and labels from R .

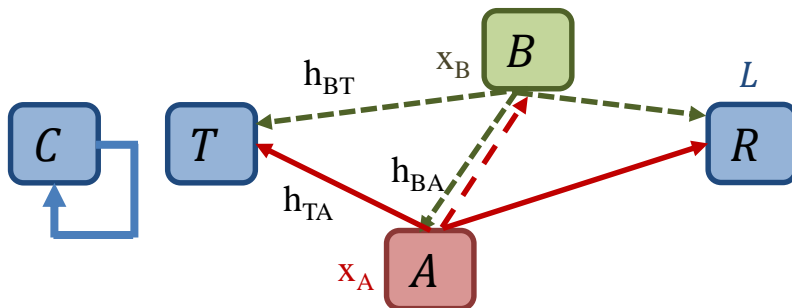

- A transmits and *changes* labels at R as well as training data of T from $h_{BT} x_B + n_T$ to $h_{BT} x_B + h_{AT} x_A + n_T$ over the air (if its transmits during sensing period).
- T retrain its classifier C with wrong labels and data samples.