



**Jamming
attack**

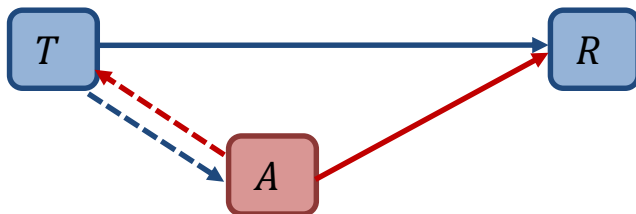


- A senses the channel between T and R , and jams it if it is busy.

**Spectrum
data
falsification
attack**

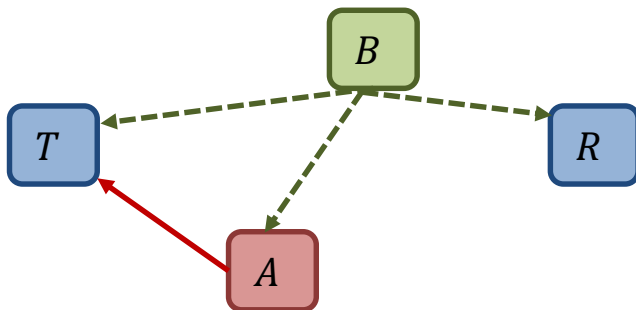

- A provides the classifier at T with wrong sensing data (i.e., reports idle if the channel is busy, and vice versa).

**Primary
user
emulation
attack**

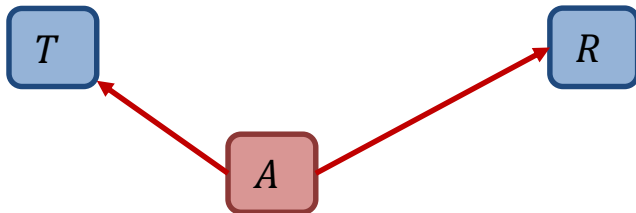

- A acts as if it is a primary user and claims the channel by transmitting.