



# LongLLaVA: Scaling Multi-modal LLMs to 1000 Images Efficiently via a Hybrid Architecture

Xidong Wang<sup>†</sup>, Dingjie Song<sup>†</sup>, Shunian Chen, Chen Zhang, Benyou Wang\*

The Chinese University of Hong Kong, Shenzhen

Shenzhen Research Institute of Big Data

<https://github.com/FreedomIntelligence/LongLLaVA>

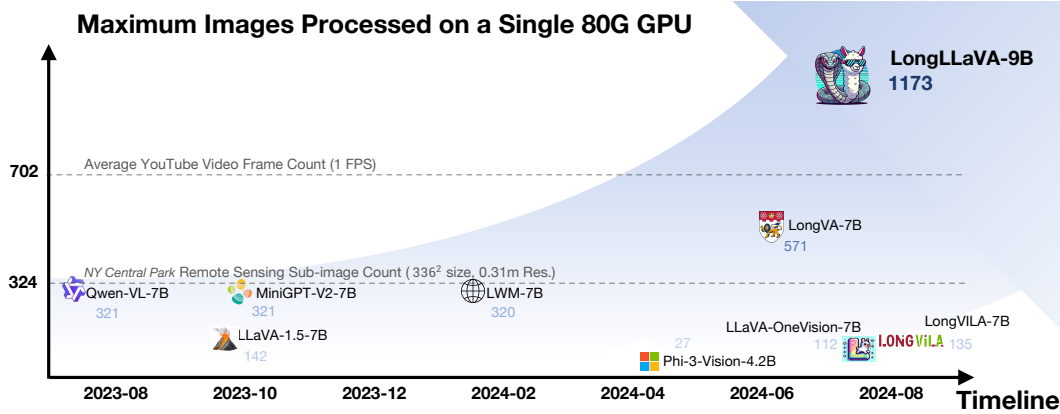


Figure 1: Comparison of the maximum images processed by MLLMs on a single 80GB GPU (Int8 Quantization), and plotted against their release dates. Our model, LongLLaVA, leads the way with the ability to handle up to 1173 images, demonstrating its superior processing capability. Res refers to resolution. Although these baseline models are capable of processing these images as input, their performance often deteriorates significantly (Song et al., 2024) with more images.

## Abstract

Expanding the long-context capabilities of Multi-modal Large Language Models (MLLMs) is crucial for video understanding, high-resolution image understanding, and multi-modal agents. This involves a series of systematic optimizations, including model architecture, data construction and training strategy, particularly addressing challenges such as *degraded performance with more images* and *high computational costs*. In this paper, we adapt the model architecture to a hybrid of Mamba and Transformer blocks, approach data construction with both temporal and spatial dependencies among multiple images and employ a progressive training strategy. The released model **LongLLaVA** (**Long-Context Large Language and Vision Assistant**) is the first hybrid MLLM, which achieved a better balance between efficiency and effectiveness. LongLLaVA not only achieves competitive results across various benchmarks, but also maintains high throughput and low memory consumption. Especially, it could process nearly a thousand images on a single A100 80GB GPU, showing promising application prospects for a wide range of tasks.

\*Benyou is the corresponding author ([wangbenyou@cuhk.edu.cn](mailto:wangbenyou@cuhk.edu.cn)); <sup>†</sup> means contributing equally.

# 1 Introduction

The rapid advancement of MLLMs (Liu et al., 2024b, 2023a; Dong et al., 2024a; Chen et al., 2024a) has demonstrated their remarkable capabilities across various applications (Chu et al., 2024; Yang et al., 2023; Wu et al., 2023b; Chen et al., 2024b). However, multi-image scenario remain an important yet to-be-explored aspect. In particular, expanding the context of MLLMs to understand longer videos (Zhang et al., 2023; Cheng et al., 2024b), higher-resolution images (Xu et al., 2024c; Wu & Xie, 2023b), and make decisions based on more historical messages (Wang et al., 2024; Liu et al., 2024c) is crucial for enhancing user experience (Li et al., 2024b) and further broadening MLLMs’ application scope (Apple, 2024).

However, extending the context length of MLLMs to improve their usability poses challenges related to degraded performance and high computational costs when processing more images. To maintain the performance in longer context, some studies (Zhang et al., 2024a; Zhao et al., 2024c) have concentrated on curating long-context training data involving multiple images to enhance performance. Additionally, other research efforts have explored innovative training strategies (Liu et al., 2024a; Zhang et al., 2024b; Li et al., 2024a; Zhang et al., 2024d) to mitigate performance declines. Regarding the issue of high computational costs, Xue et al. (2024) have made strides in improving multi-node efficiency by reducing communication costs. However, there remains a gap in solutions for accelerating the computation itself when managing longer contexts.

To address the challenges mentioned above, we propose a systematic solution called **LongLLaVA**, especially using a hybrid architecture for acceleration. This solution comprehensively optimizes across three dimensions: *Multi-modal Architecture*, *Data Construction*, and *Training Strategy*.

- For **Multi-modal Architecture**, we adopt a hybrid architecture combining Transformer with Mamba and propose an efficient image representation method that applies 2D pooling to compress image tokens, significantly reducing computational costs while maintaining performance.
- For **Data Construction**, we have designed unique formats for different tasks, enabling the model to distinguish between temporal and spatial dependencies among images.
- In terms of **Training Strategy**, we employ a three-stage method for multi-modal adaptation—Single-image Alignment, Single-image Instruction-tuning, and Multi-image Instruction-tuning—to incrementally enhance the model’s ability to handle multi-modal long contexts.

Experimntal results show that LongLLaVA excels in understanding multi-modal long contexts with high efficiency. It leads in retrieval, counting, and ordering tasks in VNBench (Zhao et al., 2024e) and achieves nearly 100% accuracy with 1,000 images on a single 80GB GPU for Needle-In-A-Haystack evaluation (Zhang et al., 2024b).

Our summarized contributions are as follows:

- We introduce LongLLaVA, a solution optimized through data construction, training strategies, and multi-modal architecture, effectively balancing performance and efficiency. To the best of our knowledge, this is the first hybrid architecture for MLLMs.
- LongLLaVA demonstrates exceptional performance in multi-modal long-context understanding, excelling in retrieval, counting, and ordering tasks. In our commitment to transparency and community research, we will open source all models, codes, and datasets associated with LongLLaVA.

## 2 Towards Scaling up the Image Number in MLLMs

### 2.1 The Curse of Image Numbers

The model’s input length increases rapidly with the number of images, leading to issues such as degraded model performance and high inference costs. With the evolution of MLLM technology, many existing open-source MLLMs have demonstrated capabilities on par with closed-source models in single-image tasks (Bai et al., 2023; Li et al., 2024a; Zhang et al., 2024a; OpenAI, 2024;

Google, 2024). However, when the task expands to multiple images, the capabilities of these models degrade significantly. Whether it is a time-related or semantically-related multi-image task, the models struggle considerably, lagging far behind the performance of closed-source models (Song et al., 2024). Such capability degradation severely limits the application scenarios of open-source MLLMs, and the open-source community urgently needs a systematic solution to address this issue.

**Excessive Input Length.** Aside from the *degraded performance*, another challenge is managing the *excessive input length* when processing a larger number of images. The visual encoder components of MLLMs typically transform each image into a large number of tokens. For instance, the CLIP encoder<sup>2</sup> (Radford et al., 2021) generates 576 image tokens for an image with a resolution of 336 pixels. Representing a three-minute video at 1 FPS would require  $3 \times 60 \times 576 = 103,680$  tokens. This results in a rapid increase in computational demand and memory usage, significantly degrading user experience and escalating service costs. Although some works have proposed compressing image tokens in 2D or 3D formats (Chen et al., 2023a; Zhang et al., 2024b; Xu et al., 2024b), this often comes at the expense of performance. Solely relying on compression methods to accommodate multiple images without substantial performance degradation is insufficient.

**High Computational and Memory Complexity.** The excessive input length results in *high computational and memory complexity*. The LLM part of existing MLLMs primarily relies on Transformer architectures, whose computational complexity grows quadratically with increases in sequence length. As the number of images (or sequence length) increases, memory usage becomes exceptionally high due to the need to store KV-Cache. As shown in Figure 1, current models on a single 80GB GPU can theoretically handle up to 384 images using Int8 quantization. Current efforts mitigate this through techniques like ring attention (Liu et al., 2024a; Zhang et al., 2024b) or sequence parallelism (Xue et al., 2024), but these solutions introduce greater time overhead, or by switching to the Mamba architecture (Gu & Dao, 2024; Zhao et al., 2024a) to address these challenges. However, the capability for In-Context Learning (ICL) in multi-image scenarios is indispensable, posing a challenge for Mamba models (Lieber et al., 2024). Therefore, there is a need for a balanced approach that considers model architecture in multimodal contexts, addressing both the high number of image tokens and reducing computational complexity.

## 2.2 Motivation for Hybrid Architecture

Table 1: Comparative Analysis of Architectures. A checkmark (✓) indicates that the architecture supports in-context learning (ICL) capabilities, while a cross (✗) denotes a relatively weaker ICL ability. For a more detailed experimental analysis, please refer to Sec. 5.1.

Architecture	Compute Complexity	ICL	Representative models
Transformer	Quadratic	✓	Gemma (Team et al., 2024a), LLaMA (Touvron et al., 2023a)
Mamba	Linear	✗	Mamba (Gu & Dao, 2024), Mamba-2 (Dao & Gu, 2024)
Hybrid	Quasi-Linear	✓	Jamba (Lieber et al., 2024), Zamba (Glorioso et al., 2024)

To balance effectiveness and efficiency in multimodal long-context scenarios, we propose to use a Mamba-Transformer hybrid architecture. As shown in Table 1, the Mamba-Transformer hybrid architecture (Lieber et al., 2024; Poli et al., 2023; De et al., 2024; Glorioso et al., 2024) is distinguished by its superior performance on ICL task and other benchmark tests, matching the performance of Mixtral-8x7B (Jiang et al., 2024a). In terms of efficiency, the Mamba-Transformer hybrid architecture is more efficient due to Mamba’s linear computational complexity. For example, a popular hybrid architecture Jamba’s throughput is typically three times that of Mixtral, which already have utilized sliding window techniques to reduce inference complexity. Jamba only requires 4GB of KV-Cache memory to process a 256K token sequence under 13B activation parameters with bf16 precision, substantially less than comparable models. Moreover, in scenarios using a single A100 80GB GPU with Int8 precision, Jamba can handle up to 140K tokens in context length, significantly surpassing the 80K of LLaMA2-7B (Touvron et al., 2023b) and the 60K of Mixtral 8×7B.

<sup>2</sup>openai/clip-vit-base-patch32

### 2.3 The Benefit of Scaling Up the Image Number

Adopting more images significantly broadens the application scenarios for current MLLMs. We will explore this from two dimensions: *Temporal Expansion* and *Spatial Expansion*.

**Temporal Expansion.** Understanding the temporal dependencies between images is crucial for a variety of applications. In multi-modal assistants, it enhances real-time recall capabilities, which is particularly beneficial for the elderly (Li et al., 2024b; Loveys et al., 2022). For mobile agents, it enables more personalized services and improves task planning (Deng et al., 2024; Li et al., 2024f; Wu et al., 2023a). In the healthcare sector, it assists in anomaly detection in 3D medical videos, thereby reducing diagnostic errors (Bai et al., 2024a).

**Spatial Expansion.** When dealing with high-resolution images (Xu et al., 2024c; Dong et al., 2024b) or when detailed understanding of images (Wu & Xie, 2023b) is required, images are often decomposed into sub-images. This process highlights the importance of grasping spatial dependencies among these sub-images. In remote sensing, an increased number of images enhances both coverage and granularity (Guo et al., 2024; Liu et al., 2022). In pathology, it minimizes information loss and improves diagnostic accuracy (Sun et al., 2024; Xu et al., 2024a). In the field of Molecular Learning, it facilitates the processing of complex reactions and the analysis of larger molecular graphs (Zhang et al., 2024c; Le et al., 2024).

## 3 LongLLaVA: Scaling LLaVA to Longer Context

To address the aforementioned challenges and enhance the model’s adaptability to long-context, multi-image scenarios, we introduce improvements from three perspectives: *multi-modal model architecture* (Sec. 3.1), *data processing protocol* (Sec. 3.2), and *training strategy* (Sec. 3.3).

### 3.1 Multi-modal Architecture

Our multimodal architecture is constructed around three core components inspired by LLaVA (Li et al., 2024a): the Vision Encoder, the Projector, and the LLM. The primary strategies for adapting to multimodal long-context are predominantly derived from two aspects.

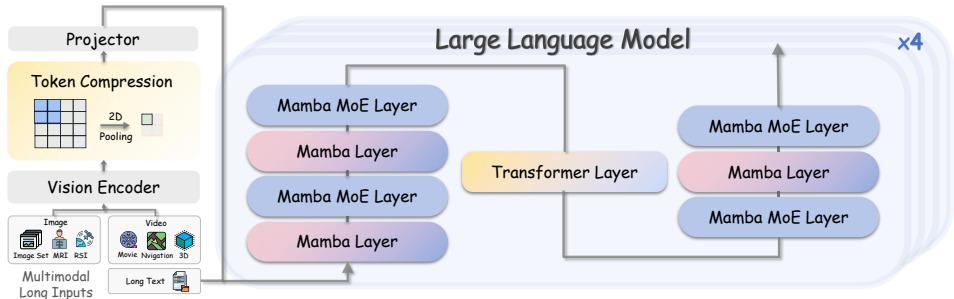


Figure 2: **Architecture of LongLLaVA.** The LongLLaVA model is capable of (1) accommodating a variety of multimodal inputs and efficiently processing image tokens via 2D token compression; (2) uniformly managing the preprocessed inputs within its hybrid LLM architecture, which comprises four stacks of hybrid layers, each blending Transformer and Mamba layers in a 7:1 ratio.

**Vision Information Processing.** We employ CLIP<sup>3</sup> as the vision encoder to encode visual information and a two-layer MLP as the projector to map vision features into the text embedding space suitable for the LLM. Prior to projection, bilinear pooling is applied, reducing the token representation of an image from 576 to 144 by aggregating  $2 \times 2$  patch units into a single token. This approach effectively conserves training and inference time while maintaining essential spatial relationships between patches. Further details on the effectiveness of this strategy are provided in Section 4.5.

**Hybrid LLM Architecture.** Our model employs a hybrid LLM architecture comprising four stacks of hybrid layers, each integrates Transformer and Mamba layers in a 7:1 ratio, as depicted in Figure 2. It also features a Mixture of Experts (MoE) approach in every other layer, utilizing 16 experts

<sup>3</sup>openai/clip-vit-base-patch32

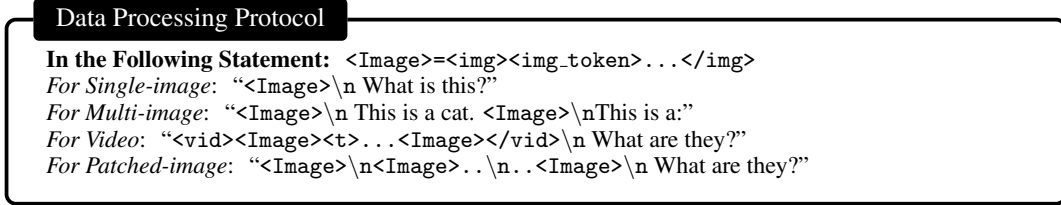


Figure 3: **Data Processing Protocol for LongLLaVA.** We utilized different tokens to distinguish various modal information, and to identify the spatial and temporal relationships within images.

and selecting the top-2 experts for each token. RMSNorm (Zhang & Sennrich, 2019) is used between layers to enhance normalization, although positional embeddings are omitted. The model incorporates Grouped Query Attention (GQA) (Ainslie et al., 2023) and SwiGLU activation functions (Shazeer, 2020), similar to other large language models. The total parameter count of the model is 53B, with activation parameters during inference totaling 13B; we designate this model as **LongLLaVA-A13B**. In an effort to make the model more efficient, we have retained only the Expert-0 in the Mamba MoE Layer, thereby constructing **LongLLaVA-9B**.

### 3.2 Data Processing Protocol

To ensure that the model effectively distinguishes between temporal and spatial dependencies among images in multi-image scenarios and performs well across various tasks, we meticulously differentiated special characters in different scenarios. As shown in Figure 3, these special characters comprehensively address the various relationships between images in different contexts, thereby enhancing the model’s adaptability to diverse tasks.

**Regular Single and Multiple Images.** For this type of inputs, we use `<img>` and `</img>` to enclose image tokens, helping the model differentiate between image and text tokens.

**Video.** For video inputs, to enable the model to understand the temporal relationship between frames, we first use `<vid>` and `</vid>` to enclose image tokens. Additionally, we add the special symbol `<t>` between different frames to represent the temporal dependency between them.

**High Resolution Image.** For complex single-image understanding that require dividing an image into multiple sub-images, we use `\n` to separate the main image from its sub-images. For the arrangement of sub-images, we traverse from the top-left to the bottom-right, adding `\n` between split lines to preserve the relative spatial positions of the sub-images.

### 3.3 Training Strategy

In our training strategy, we implement single-modal and multi-modal adaptations to transform a pre-trained language model into a multimodal long-context model.

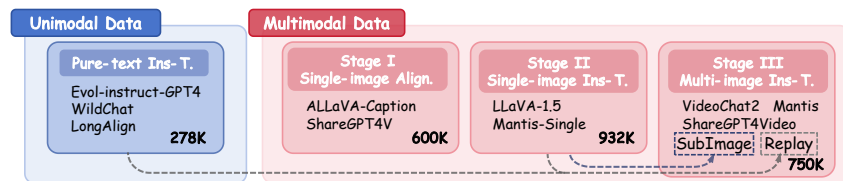


Figure 4: **Dataset Taxonomy of LongLLaVA.** Replay refers to data sampled from former phase to maintain single-image and dialogue understanding ability. SubImage denotes a constructed dataset for understanding complex single images divided into sub-images. Ins-T. and Align. refer to instruction-tuning and alignment, respectively.

**Pure-text Instruction Tuning.** We initially enhance the pre-trained language model’s ability to follow instructions of varying lengths in pure-text contexts. This is achieved using a comprehensive

dataset totaling 278k pure text entries from Evol-instruct-GPT4 (Xu et al., 2023), WildChat (Zhao et al., 2024d), and LongAlign (Bai et al., 2024b).

For multi-modal adaptation, following the *Single-image Alignment* and *Single-image Instruction-tuning* stages in LLaVA (Li et al., 2024a), we introduce a *Multi-image Instruction-tuning* stage to progressively enhance the model’s long-context capabilities. We adopt progressive training not only for better control of variables but also to increase model reusability (Fu et al., 2024b). The specific dataset usage is detailed in Figure 4.

**Stage I: Single-image Alignment.** This stage is to align visual modal features with textual modality. We utilize datasets such as ALLaVA-Caption (Chen et al., 2024a) and ShareGPT4V (Chen et al., 2023b), which comprise approximately 600K high-quality image-caption pairs. During this phase, only the projector is trained while freezing the parameters of the Visual Encoder and LLM.

**Stage II: Single-image Instruction Tuning.** This stage aims to endow the model with multimodal instruction-following capabilities. We use datasets like LLaVA-1.5 (Liu et al., 2023b) and Mantis-Single (Jiang et al., 2024b), totaling around 932K high-quality question-answer pairs. Here, only the Visual Encoder is frozen, and the projector and LLM parts are trained. This process ultimately results in the development of LongLLaVA (single image).

**Stage III: Multi-image Instruction Tuning.** In this stage, the model is trained to follow instructions in multimodal long-context scenarios. We sample 200K, 200K and 50K data items from Mantis (Jiang et al., 2024b), VideoChat2 (Li et al., 2024d) and ShareGPT4Video (Chen et al., 2024c) respectively. To preserve the model’s single-image comprehension and pure-text dialogue capabilities, we include an additional 200K and 50K data items from the Single-image Instruction-tuning and Pure-text Instruction-tuning phases as the *Replay* component. Furthermore, to enhance the model’s ability to interpret complex single images segmented into multiple sub-images, we extract 50K data items from the Single-image Instruction-tuning phase, perform padding and segmentation, and divide the original images into sub-images of size  $336 \times 336$  as the *Sub-Image* component. For multi-modal adaptation, fo

## 4 Experiments

### 4.1 Training Details

For training, we utilize random sampling to concatenate data items into a token length of 176,000, separated by the `<eos>` token. This approach helps in managing extensive datasets and ensuring diverse coverage of different data segments. Training is executed across three compute nodes, each equipped with eight A800 GPUs, leveraging DeepSpeed Zero-3 as the distributed strategy to enhance scalability and efficiency. We employ a cosine learning rate scheduler with a warm-up rate of 0.03, set the training epoch to 1, and the learning rate to  $1e-5$ . This configuration is designed to balance learning speed and model convergence effectively.

### 4.2 Evaluation Setup

We evaluate the model’s multimodal long-context understanding ability using the multi-image evaluation. For detailed exploration of the basic functionalities through single-image evaluation, please refer to Appendix B. Both LongLLaVA-9B and LongLLaVA-A13B are evaluated using Int8 quantization, a method designed to reduce computational costs while preserving performance. Additionally, the temperature is set to zero to guarantee consistent performance evaluation. Unless specified otherwise, “LongLLaVA” in the subsequent text refers to LongLLaVA-A13B.

**Benchmarks.** Our multi-image evaluation utilizes three multi-image benchmarks: MileBench (Song et al., 2024) for assessing multimodal long-context scenario performance, and Video-MME (Fu et al., 2024a) along with MVBench (Li et al., 2024d) for video analysis capabilities. Detailed descriptions of these benchmarks are available in Appendix A.

**Baselines.** We compare our model against four commercial models: GPT-4V<sup>4</sup> (OpenAI, 2024), GPT-4o<sup>5</sup>, Gemini-1.5-Pro<sup>6</sup> (Google, 2024), and Claude3-Opus<sup>7</sup>, as well as five open-source models:

<sup>4</sup>gpt-4-vision-preview

<sup>5</sup><https://openai.com/index/hello-gpt-4o/>

<sup>6</sup>gemini-1.5-pro

<sup>7</sup>claude-3-opus-20240229

Table 2: Results of Multi-image Evaluation. PFLOPs represents the number of floating-point operations required to infer 128 images. The highest scores for proprietary and open-source MLLMs are marked in bold. Video-MME is evaluated under the settings of without subtitles (w/o subs).

Model	PFLOPs	MileBench				VideoMME w/o subs				MVBench
		Temporal	Semantic	IR	Avg.	Short	Medium	Long	Avg.	
<b>Proprietary Models</b>										
GPT-4V	-	45.6	58.9	86.7	63.7	70.5	55.8	53.5	59.9	<b>43.5</b>
GPT-4o	-	<b>56.2</b>	<b>63.5</b>	<b>88.8</b>	<b>69.5</b>	72.5	63.1	58.6	64.7	-
Gemini-1.5-Pro	-	50.2	58.3	88.0	65.5	<b>78.8</b>	<b>68.8</b>	<b>61.1</b>	<b>69.6</b>	-
Claude3-Opus	-	37.4	48.1	25.0	36.8	70.5	57.4	51.2	59.7	-
<b>Open-source MLLMs</b>										
Video-LLaMA2	3.71	-	-	-	-	55.9	45.4	42.1	47.8	34.1
VideoChat2	0.24	25.5	25.5	9.2	20.1	48.3	37.0	33.2	39.5	51.9
LongVILA	3.90	-	-	-	-	<b>61.8</b>	<b>49.7</b>	39.7	50.5	-
Phi-3-Vision	2.68	46.9	50.0	18.7	38.5	-	-	-	-	-
OmChat	3.90	51.4	52.0	34.2	45.9	-	-	-	-	50.2
<b>LongLLaVA-9B</b>	0.15	47.3	46.8	45.4	46.5	52.4	42.2	36.4	43.7	49.1
<b>LongLLaVA-A13B</b>	0.22	<b>52.7</b>	<b>52.1</b>	<b>67.5</b>	<b>57.4</b>	60.9	<b>49.7</b>	<b>44.1</b>	<b>51.6</b>	<b>54.6</b>

Phi-3-Vision<sup>8</sup>, OmChat (Zhao et al., 2024b), LongVILA (Xue et al., 2024), Video-LLaMA-2 (Cheng et al., 2024a) and VideoChat2 (Li et al., 2024d).

### 4.3 Main Results

As shown in Table 2, LongLLaVA demonstrates superior performance among open-source models on MileBench, even surpassing Claude3-Opus, and particularly excels in retrieval tasks. This highlights LongLLaVA’s impressive capabilities in handling multi-image tasks. Notably, LongLLaVA’s effectiveness is further underscored by its performance on video benchmarks such as Video-MME and MVBench. It shows exceptional results, especially in tasks involving medium to long-length videos, outperforming traditional video models like Video-LLaMA2 and VideoChat2.

Remarkably, despite achieving these impressive results, LongLLaVA operates with an order of magnitude fewer FLOPs compared to other models. This efficiency in computational resources not only underscores LongLLaVA’s advanced performance but also its optimization in resource management. These results reflect a significant advancement in the research community’s efforts to close the performance gap with commercial models.

### 4.4 Diagnostic Evaluation of Long-Context MLLMs

Table 3: Long Context MLLMs’ Atomic Capabilities Analysis using VNBench (Zhao et al., 2024e). PFLOPs refers to the number of floating-point operations required for inference on 54 images, which corresponds to the average number of frames extracted from the dataset videos at 1 FPS.

Video MLLM	PFLOPs	Retrieval			Ordering			Counting			Avg.
		E	I-1	I-2	E	I-1	I-2	E-1	E-2	I	
<b>Proprietary Models</b>											
Gemini-1.5	-	100.0	96.0	76.0	90.7	95.3	32.7	60.7	7.3	42.0	66.7
GPT-4o	-	100.0	98.0	87.3	88.4	86.6	45.2	36.8	0.0	36.1	64.4
GPT-4V	-	100.0	99.3	82.0	42.6	22.8	23.0	37.6	0.0	32.4	48.9
<b>Open-source MLLMs</b>											
Video-LLama2	0.85	1.2	26.0	6.0	0.0	0.0	0.0	2.0	4.7	0.7	4.5
VideoChat2	0.08	43.4	40.0	14.6	0.0	0.0	1.3	4.4	8.0	12.4	12.4
<b>LongLLaVA-9B</b>	0.07	98.3	57.2	96.3	24.2	57.2	24.3	24.5	21.0	26.0	44.4
<b>LongLLaVA-A13</b>	0.09	<b>100</b>	<b>73.3</b>	<b>100.0</b>	<b>37.5</b>	<b>35.3</b>	<b>34.8</b>	<b>36.0</b>	<b>23.7</b>	<b>28.0</b>	<b>52.1</b>

Considering that former evaluations cannot adequately capture the abilities of MLLMs over long contexts, we employ a new diagnostic evaluation set, VNBench (Zhao et al., 2024e), to further

<sup>8</sup><https://huggingface.co/microsoft/Phi-3-vision-128k-instruct>

analyze the atomic capabilities of models in long contexts. VNBench is a benchmark construction framework based on synthetic video generation, encompassing tasks such as retrieval, ordering, and counting.

The results, as presented in Table 3, indicate that LongLLaVA exhibits performance that is on par with leading closed-source models in tasks such as cross-context retrieval, ordering, and technical capabilities, even outperforms GPT-4V. Among open-source models, LongLLaVA also shows its superior performance. This positions LongLLaVA as a prominent contender in the field, demonstrating its advanced capabilities in managing and interpreting long contexts. To further assess the retrieval ability of LongLLaVA, we conducted multimodal needle-in-a-haystack experiment, the specifics of which are outlined in Appendix C.

#### 4.5 Ablation Study

Table 4: **Ablation Study** of ■ multi-modal architecture and ■ dataset construction. Each strategy builds upon the previous row, except for 1D Pooling.  $Mile_{avg}^*$  represents the average score of MileBench. 1D and 2D denote different pooling strategies. #T refers to the token count for one image.

Method	#T	GQA	MMMU	SQA <sup>I</sup>	SEED <sup>v1</sup> <sub>img</sub>	Mile <sup>*</sup> <sub>avg</sub>
LLaVA-1.5-13B	576	63.3	34.4	71.6	68.2	27.6
+Jamba	576	63.2	41.4	75.4	69.8	38.2
+1D Pooling	144	60.4	42.0	73.9	66.3	36.2
+2D Pooling	144	61.3	42.1	75.2	67.4	37.7
+Single-image Data	144	62.2	42.1	75.9	68.9	50.0
+Multi-image Data	144	59.9	39.2	73.4	65.3	57.4

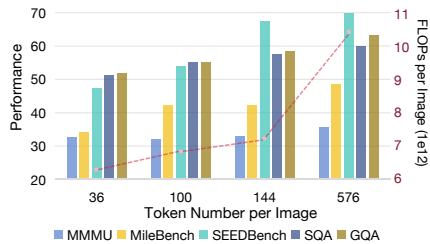


Figure 5: Performance across five datasets and inference costs with varying token numbers per image.

As shown in Table 4, significant improvements were observed across all evaluation sets when using the **hybrid LLM architecture**, Jamba, with identical data and model parameters, demonstrating its potential in multimodal scenarios. For **token compression**, we choose the 2D pooling, which significantly reduces computational load while keeping performance degradation within acceptable limits (less than 2.2%). Compared to 1D pooling, the 2D pooling method, which pools along the height and width directions to obtain a 12x12 token arrangement, yields better results (0.1~1.5 improvement). As demonstrated in Figure 5, setting 144 tokens per image effectively maintains performance while significantly reducing inference costs, particularly noticeable in the case of SEEDBench. Regarding **data construction**, after training on our single-image data, the model achieved a 1.5% accuracy improvement on SEEDBench and 12.3% on MileBench. Subsequent multi-image training led to a further 7.4% increase on MileBench, validating the dataset construction’s effectiveness.

## 5 More Analysis

In this section, we conduct further analysis to understand the inner workings and multimodal long-context capability of LongLLaVA.

### 5.1 On the Motivation for the Hybrid Architecture

We explore the strengths and weaknesses of different architectures in terms of ICL capabilities and inference efficiency, highlighting the balanced advantages of multimodal hybrid architectures that combine the strengths of both. For Mamba, we select Cobra (Zhao et al., 2024a), which, to the best of our knowledge, is the first and only multimodal architecture to use Mamba as its LLM within the LLaVA framework. For Transformer, we choose the 13B parameter LLaVA-1.6, which has inference parameters consistent with LongLLaVA, to enable a more accurate efficiency comparison.

**ICL Analysis.** We evaluate the performance on the Matching Image task from VL-ICL benchmark (Zong et al., 2024) for multi-modal in-context learning. This task’s inputs contain an image pair  $x = \{x_1, x_2\}$ , and output  $y$  indicates whether a specific relation  $r$  holds between them.



Table 5: ICL Capability and Efficiency Analysis across Different Architectures. Cobra is the largest Mamba-based LLM to date. TP and Mem. refer to throughput and memory usage.

Model	Arch.	Active Param.	#Few-shot of VL-ICL				100K Token (Efficiency)		
			1	2	4	5	Prefill (s)	TP (tokens/s)	Mem.(GB)
Cobra	Mamba	3B	48.7	50.3	51.0	51.5	10.2	42.7	29.9
LLaVA-1.6	Transformer	13B	50.0	52.3	54.6	58.9	34.0	14.7	79.4
<b>LongLLaVA-9B</b>	Hybrid	9B	51.6	57.8	58.4	60.2	16.5	62.1	38.7
<b>LongLLaVA-A13B</b>	Hybrid	13B	52.3	59.0	59.0	61.3	25.5	37.6	79.1

MLLMs are required to learn the relation from examples. As shown in the Table 5, both Hybrid and Transformer architectures exhibit rapid performance improvements with the increase in examples, whereas the Mamba architecture shows a slower improvement, confirming its ICL shortcomings.

**Efficiency Analysis.** We focus on three aspects: Prefill Time (first inference latency), Throughput (next tokens per second), and Memory Usage. We control the input text length to 100K and measure time and maximum memory usage for generating outputs of 1 token and 1000 tokens. Throughput is calculated as  $(1000 - 1)/(time_{1000} - time_1)$ . To better simulate real application scenario, Transformer and Hybrid architectures are evaluated using vLLM framework (Kwon et al., 2023) with Int8 quantization (Team et al., 2024b; Frantar et al., 2023). As shown in the Table 5, Mamba architecture has the fastest Prefill Time, highest throughput. The Hybrid architecture achieves 2.5 times the Throughput, 75% of the Prefill Time, and reduced memory usage compared to the Transformer architecture with similar inference parameters.

## 5.2 Scaling Law of the Image Number

With more images processed, it could support more image patches for high-resolution image understanding and more video frames for video understanding. To explore the impact of increasing the number of sub-images and video frames, we evaluate LongLLaVA on the benchmarks V\* Bench (Wu & Xie, 2023a) and Video-MME (Fu et al., 2024a) respectively.

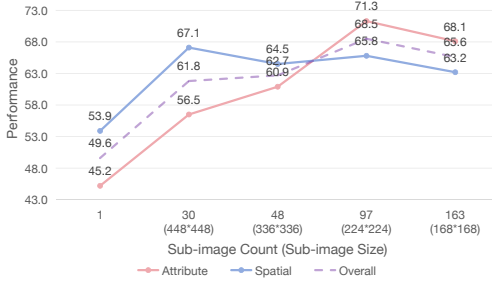


Figure 6: Performance of LongLLaVA with increasing sub-image counts on V\*Bench

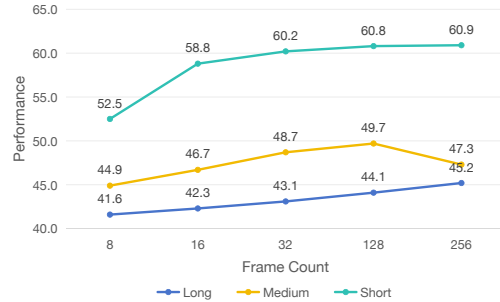


Figure 7: Performance of LongLLaVA with increasing frame counts on Video-MME

**Scale up Number of SubImages.** V\* Bench evaluates a model’s ability to locate small objects within large images. As shown in Figure 6, increasing the number of sub-images initially improves model performance significantly, indicating better understanding of image details. However, we also find that further increasing the number of sub-images slightly degraded the performance, suggesting that an excessive number of sub-images may interfere with performance on this task.

**Scale up Number of Frames.** Video-MME (Fu et al., 2024a) is a benchmark that tests a model’s ability to extract information from videos. We can see from Figure 7 that as the number of sampled frames increases, the model’s performance on the benchmark improves significantly, reaching its peak when 256 frames are extracted. This indicates that the model can effectively understand and utilize the information contained in the additionally sampled frames to provide better responses.

## 6 More Applications for LongLLaVA

Apart from the long video understanding task introduced in Section 4.3, which demands a prolonged temporal image comprehension ability, we have investigated two additional domains, Healthcare and

Science. These areas necessitate the utilization of LongLLaVA’s fine-grained image understanding capability, providing us a broader platform to further probe its potential applications.

### 6.1 Application in Healthcare

Table 6: Performance of the models on the pathology image understanding tasks.

Model	Size	VQA-RAD	PathVQA
GPT-4V	-	39.5	-
LLaVA	34B	58.6	59.1
LLaVA-Med	7B	55.5	35.9
HuatuoGPT-V	8B	63.8	<b>59.9</b>
LongLLaVA-Med	9B	<b>68.5</b>	55.0

Table 7: Performance on 3D CT image understanding task. Acc., Rec. and Prec. refer to Accuracy, Recall and Precision, respectively.

Model	Acc.	Rec.	Prec.	F1
CT-CLIP	65.1	73.8	30.4	43.0
LongLLaVA-Med	<b>86.7</b>	<b>77.6</b>	<b>35.5</b>	<b>48.5</b>

To evaluate the potential of LongLLaVA in the Healthcare domain, we selected two tasks: Pathology Image Understanding and 3D CT Image Understanding. Initially, we trained LongLLaVA-9B for one epoch using PubMedVision to equip it with basic multimodal medical capabilities, a process which took five hours with eight A800 GPUs. As a result, we obtained LongLLaVA-Med.

**Pathology Image Understanding.** In the healthcare field, we chose pathological image understanding task, which requires the model to possess fine-grained recognition capabilities and medical knowledge. We evaluated LongLLaVA using two benchmarks, VQA-RAD (Lau et al., 2018) and PathVQA (He et al., 2020). As presented in Table 6, our model proves competitive in comparison to SOTA models (LLaVA-Med (Li et al., 2024c) and HuatuoGPT-V (Chen et al., 2024b)), even with less training data.

**3D CT Image Understanding.** To evaluate LongLLaVA’s capability in 3D vision tasks, we selected the CT image understanding task. Since 3D CT images can be viewed as a combination of multiple slices of the human body, all slices were converted to RGB format and processed as a multi-image sequence for model interpretation. We conducted a zero-shot evaluation on the CT-RATE (Hamamci et al., 2024) validation set, with random selection of varying resolutions from the same patients. The dataset contains 1304 samples, with slice resolutions ranging from  $512 \times 512$  to  $1024 \times 1024$ , and an average of 690. The number of slices per sample ranges from a maximum of 984 to a minimum of 100, with an average of 300. Our results in Table 7 indicate that LongLLaVA-Med outperforms the state-of-the-art model by 21.6 points in terms of accuracy, thereby establishing a new precedent in the task of understanding 3D CT images.

### 6.2 Application in Science

In science domain, we focus on geology and deal with understanding remote sensing images. In the field of remote sensing, models are required to perform Visual Question Answering (VQA) based on high-resolution remote sensing images (Zhou et al., 2024). We followed SkySenseGPT (Luo et al., 2024), the latest MLLM in this domain. We selected the latest FIT-RSFG-VQA task from their work, which is designed to evaluate a model’s fine-grained perception capabilities and instruction-following ability in this domain. As shown in Table 8, LongLLaVA maintains excellent performance among all models. Moreover, after fine-tuning the model on some remote sensing data, its performance improved further, surpassing existing SOTA models.

Since the image resolution in FIT-RSFG-VQA is only  $512 \times 512$ , to showcase LongLLaVA’s capability in high-resolution remote sensing image understanding, we conducted a case study. We extracted two remote sensing images from STAR (Li et al., 2024e), with resolutions of  $1024 \times 768$  and  $3327 \times 4083$  respectively.

Table 8: On the FIT-RSFG-VQA

Model	Size	Acc.
Zero-shot Setting		
LLaVA1.5-7B	7B	58.6
GeoChat	7B	53.5
LongLLaVA	9B	<b>65.2</b>
Fine-tuned Setting		
SkySenseGPT	7B	79.8
LongLLaVA-RS*	9B	<b>82.3</b>

\*LongLLaVA-RS was tuned on only 27% of the SkySenseGPT data.

The results in Figure 8 demonstrate that, after performing subimage segmentation, our model successfully answered VQA questions requiring high-resolution recognition capabilities, whereas GPT-4V failed.

## 7 Conclusion

In this study, we introduce LongLLaVA, an innovative hybrid architecture model that excels in long-context multi-modal understanding. The model integrates Mamba and Transformer blocks, leveraging temporal and spatial dependencies between multiple images to construct data, and employs a progressive training strategy. LongLLaVA demonstrates competitive performance across various benchmarks while ensuring efficiency, setting a new standard for long-context MLLMs.



Figure 8: A Comparative Study on Remote Sensing Image Understanding using LongLLaVA and GPT-4V.

## References

- Joshua Ainslie, James Lee-Thorp, Michiel de Jong, Yury Zemlyanskiy, Federico Lebrón, and Sumit Sanghai. Gqa: Training generalized multi-query transformer models from multi-head checkpoints, 2023. URL <https://arxiv.org/abs/2305.13245>.
- Apple. Apple intelligence foundation language models, 2024. URL [/papers/apple\\_intelligence\\_foundation\\_language\\_models.pdf](/papers/apple_intelligence_foundation_language_models.pdf).
- Fan Bai, Yuxin Du, Tiejun Huang, Max Q-H Meng, and Bo Zhao. M3d: Advancing 3d medical image analysis with multi-modal large language models. *arXiv preprint arXiv:2404.00578*, 2024a.
- Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou, and Jingren Zhou. Qwen-vl: A frontier large vision-language model with versatile abilities. *arXiv preprint arXiv:2308.12966*, 2023.
- Yushi Bai, Xin Lv, Jiajie Zhang, Yuze He, Ji Qi, Lei Hou, Jie Tang, Yuxiao Dong, and Juanzi Li. Longalign: A recipe for long context alignment of large language models, 2024b. URL <https://arxiv.org/abs/2401.18058>.
- Guiming Hardy Chen, Shunian Chen, Ruifei Zhang, Junying Chen, Xiangbo Wu, Zhiyi Zhang, Zhihong Chen, Jianquan Li, Xiang Wan, and Benyou Wang. Allava: Harnessing gpt4v-synthesized data for a lite vision-language model. *arXiv preprint arXiv:2402.11684*, 2024a.
- Jun Chen, Deyao Zhu, Xiaoqian Shen, Xiang Li, Zechun Liu, Pengchuan Zhang, Raghuraman Krishnamoorthi, Vikas Chandra, Yunyang Xiong, and Mohamed Elhoseiny. Minigpt-v2: large language model as a unified interface for vision-language multi-task learning. *arXiv preprint arXiv:2310.09478*, 2023a.
- Junying Chen, Ruyi Ouyang, Anningzhe Gao, Shunian Chen, Guiming Hardy Chen, Xidong Wang, Ruifei Zhang, Zhenyang Cai, Ke Ji, Guangjun Yu, et al. Huatuoqpt-vision, towards injecting medical visual knowledge into multimodal llms at scale. *arXiv preprint arXiv:2406.19280*, 2024b.
- Lin Chen, Jinsong Li, Xiaoyi Dong, Pan Zhang, Conghui He, Jiaqi Wang, Feng Zhao, and Dahua Lin. Sharegpt4v: Improving large multi-modal models with better captions, 2023b. URL <https://arxiv.org/abs/2311.12793>.
- Lin Chen, Xilin Wei, Jinsong Li, Xiaoyi Dong, Pan Zhang, Yuhang Zang, Zehui Chen, Haodong Duan, Bin Lin, Zhenyu Tang, et al. Sharegpt4video: Improving video understanding and generation with better captions. *arXiv preprint arXiv:2406.04325*, 2024c.
- Zesen Cheng, Sicong Leng, Hang Zhang, Yifei Xin, Xin Li, Guanzheng Chen, Yongxin Zhu, Wenqi Zhang, Ziyang Luo, Deli Zhao, and Lidong Bing. Videollama 2: Advancing spatial-temporal modeling and audio understanding in video-llms, 2024a. URL <https://arxiv.org/abs/2406.07476>.
- Zesen Cheng, Sicong Leng, Hang Zhang, Yifei Xin, Xin Li, Guanzheng Chen, Yongxin Zhu, Wenqi Zhang, Ziyang Luo, Deli Zhao, and Lidong Bing. Videollama 2: Advancing spatial-temporal modeling and audio understanding in video-llms. *arXiv preprint arXiv:2406.07476*, 2024b. URL <https://arxiv.org/abs/2406.07476>.
- Xiangxiang Chu, Limeng Qiao, Xinyu Zhang, Shuang Xu, Fei Wei, Yang Yang, Xiaofei Sun, Yiming Hu, Xinyang Lin, Bo Zhang, et al. Mobilevlm v2: Faster and stronger baseline for vision language model. *arXiv preprint arXiv:2402.03766*, 2024.
- Tri Dao and Albert Gu. Transformers are ssms: Generalized models and efficient algorithms through structured state space duality, 2024. URL <https://arxiv.org/abs/2405.21060>.
- Soham De, Samuel L. Smith, Anushan Fernando, Aleksandar Botev, George Cristian-Muraru, Albert Gu, Ruba Haroun, Leonard Berrada, Yutian Chen, Srivatsan Srinivasan, Guillaume Desjardins, Arnaud Doucet, David Budden, Yee Whye Teh, Razvan Pascanu, Nando De Freitas, and Caglar Gulcehre. Griffin: Mixing gated linear recurrences with local attention for efficient language models, 2024. URL <https://arxiv.org/abs/2402.19427>.

- Shihan Deng, Weikai Xu, Hongda Sun, Wei Liu, Tao Tan, Jianfeng Liu, Ang Li, Jian Luan, Bin Wang, Rui Yan, et al. Mobile-bench: An evaluation benchmark for llm-based mobile agents. *arXiv preprint arXiv:2407.00993*, 2024.
- Xiaoyi Dong, Pan Zhang, Yuhang Zang, Yuhang Cao, Bin Wang, Linke Ouyang, Xilin Wei, Songyang Zhang, Haodong Duan, Maosong Cao, Wenwei Zhang, Yining Li, Hang Yan, Yang Gao, Xinyue Zhang, Wei Li, Jingwen Li, Kai Chen, Conghui He, Xingcheng Zhang, Yu Qiao, Dahua Lin, and Jiaqi Wang. Internlm-xcomposer2: Mastering free-form text-image composition and comprehension in vision-language large model. *arXiv preprint arXiv:2401.16420*, 2024a.
- Xiaoyi Dong, Pan Zhang, Yuhang Zang, Yuhang Cao, Bin Wang, Linke Ouyang, Songyang Zhang, Haodong Duan, Wenwei Zhang, Yining Li, Hang Yan, Yang Gao, Zhe Chen, Xinyue Zhang, Wei Li, Jingwen Li, Wenhai Wang, Kai Chen, Conghui He, Xingcheng Zhang, Jifeng Dai, Yu Qiao, Dahua Lin, and Jiaqi Wang. Internlm-xcomposer2-4khd: A pioneering large vision-language model handling resolutions from 336 pixels to 4k hd, 2024b. URL <https://arxiv.org/abs/2404.06512>.
- Elias Frantar, Saleh Ashkboos, Torsten Hoefler, and Dan Alistarh. Gptq: Accurate post-training quantization for generative pre-trained transformers, 2023. URL <https://arxiv.org/abs/2210.17323>.
- Chaoyou Fu, Peixian Chen, Yunhang Shen, Yulei Qin, Mengdan Zhang, Xu Lin, Jinrui Yang, Xiawu Zheng, Ke Li, Xing Sun, Yunsheng Wu, and Rongrong Ji. Mme: A comprehensive evaluation benchmark for multimodal large language models, 2023.
- Chaoyou Fu, Yuhang Dai, Yondong Luo, Lei Li, Shuhuai Ren, Renrui Zhang, Zihan Wang, Chenyu Zhou, Yunhang Shen, Mengdan Zhang, et al. Video-mme: The first-ever comprehensive evaluation benchmark of multi-modal llms in video analysis. *arXiv preprint arXiv:2405.21075*, 2024a.
- Yao Fu, Rameswar Panda, Xinyao Niu, Xiang Yue, Hannaneh Hajishirzi, Yoon Kim, and Hao Peng. Data engineering for scaling language models to 128k context. *arXiv preprint arXiv:2402.10171*, 2024b.
- Paolo Glorioso, Quentin Anthony, Yury Tokpanov, James Whittington, Jonathan Pilault, Adam Ibrahim, and Beren Millidge. Zamba: A compact 7b ssm hybrid model, 2024. URL <https://arxiv.org/abs/2405.16712>.
- Team Google. Gemini 1.5: Unlocking multimodal understanding across millions of tokens of context, 2024. URL <https://arxiv.org/abs/2403.05530>.
- Albert Gu and Tri Dao. Mamba: Linear-time sequence modeling with selective state spaces, 2024. URL <https://arxiv.org/abs/2312.00752>.
- Haonan Guo, Xin Su, Chen Wu, Bo Du, Liangpei Zhang, and Deren Li. Remote sensing chatgpt: Solving remote sensing tasks with chatgpt and visual models, 2024. URL <https://arxiv.org/abs/2401.09083>.
- Ibrahim Ethem Hamamci, Sezgin Er, Furkan Almas, Ayse Gulnihan Simsek, Sevval Nil Esirgun, Irem Dogan, Muhammed Furkan Dasedelen, Bastian Wittmann, Enis Simsar, Mehmet Simsar, et al. A foundation model utilizing chest ct volumes and radiology reports for supervised-level zero-shot detection of abnormalities. *arXiv preprint arXiv:2403.17834*, 2024.
- Xuehai He, Yichen Zhang, Luntian Mou, Eric Xing, and Pengtao Xie. Pathvqa: 30000+ questions for medical visual question answering. *arXiv preprint arXiv:2003.10286*, 2020.
- Drew A. Hudson and Christopher D. Manning. Gqa: A new dataset for real-world visual reasoning and compositional question answering, 2019.
- Albert Q. Jiang, Alexandre Sablayrolles, Antoine Roux, Arthur Mensch, Blanche Savary, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Emma Bou Hanna, Florian Bressand, Gianna Lengyel, Guillaume Bour, Guillaume Lample, L elio Renard Lavaud, Lucile Saulnier, Marie-Anne Lachaux, Pierre Stock, Sandeep Subramanian, Sophia Yang, Szymon Antoniak, Teven Le Scao, Th eophile Gervet, Thibaut Lavril, Thomas Wang, Timoth e Lacroix, and William El Sayed. Mixtral of experts, 2024a. URL <https://arxiv.org/abs/2401.04088>.

- Dongfu Jiang, Xuan He, Huaye Zeng, Cong Wei, Max Ku, Qian Liu, and Wenhua Chen. Mantis: Interleaved multi-image instruction tuning, 2024b. URL <https://arxiv.org/abs/2405.01483>.
- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. Efficient memory management for large language model serving with pagedattention, 2023. URL <https://arxiv.org/abs/2309.06180>.
- Jason J Lau, Soumya Gayen, Asma Ben Abacha, and Dina Demner-Fushman. A dataset of clinically generated visual questions and answers about radiology images. *Scientific data*, 5(1):1–10, 2018.
- Khiem Le, Zhichun Guo, Kaiwen Dong, Xiaobao Huang, Bozhao Nan, Roshni Iyer, Xiangliang Zhang, Olaf Wiest, Wei Wang, and Nitesh V. Chawla. Molx: Enhancing large language models for molecular learning with a multi-modal extension, 2024. URL <https://arxiv.org/abs/2406.06777>.
- Bo Li, Yuanhan Zhang, Dong Guo, Renrui Zhang, Feng Li, Hao Zhang, Kaichen Zhang, Yanwei Li, Ziwei Liu, and Chunyuan Li. Llava-onevision: Easy visual task transfer. *arXiv preprint arXiv:2408.03326*, 2024a.
- Bohao Li, Rui Wang, Guangzhi Wang, Yuying Ge, Yixiao Ge, and Ying Shan. Seed-bench: Benchmarking multimodal llms with generative comprehension, 2023.
- Chunyuan Li, Zhe Gan, Zhengyuan Yang, Jianwei Yang, Linjie Li, Lijuan Wang, Jianfeng Gao, et al. Multimodal foundation models: From specialists to general-purpose assistants. *Foundations and Trends® in Computer Graphics and Vision*, 16(1-2):1–214, 2024b.
- Chunyuan Li, Cliff Wong, Sheng Zhang, Naoto Usuyama, Haotian Liu, Jianwei Yang, Tristan Naumann, Hoifung Poon, and Jianfeng Gao. Llava-med: Training a large language-and-vision assistant for biomedicine in one day. *Advances in Neural Information Processing Systems*, 36, 2024c.
- Kunchang Li, Yali Wang, Yinan He, Yizhuo Li, Yi Wang, Yi Liu, Zun Wang, Jilan Xu, Guo Chen, Ping Luo, Limin Wang, and Yu Qiao. Mvbench: A comprehensive multi-modal video understanding benchmark, 2024d. URL <https://arxiv.org/abs/2311.17005>.
- Yansheng Li, Linlin Wang, Tingzhu Wang, Xue Yang, Junwei Luo, Qi Wang, Youming Deng, Wenbin Wang, Xian Sun, Haifeng Li, et al. Star: A first-ever dataset and a large-scale benchmark for scene graph generation in large-size satellite imagery. *arXiv preprint arXiv:2406.09410*, 2024e.
- Yuanchun Li, Hao Wen, Weijun Wang, Xiangyu Li, Yizhen Yuan, Guohong Liu, Jiacheng Liu, Wenxing Xu, Xiang Wang, Yi Sun, et al. Personal llm agents: Insights and survey about the capability, efficiency and security. *arXiv preprint arXiv:2401.05459*, 2024f.
- Opher Lieber, Barak Lenz, Hofit Bata, Gal Cohen, Jhonathan Osin, Itay Dalmedigos, Erez Safahi, Shaked Meir, Yonatan Belinkov, Shai Shalev-Shwartz, Omri Abend, Raz Alon, Tomer Asida, Amir Bergman, Roman Glozman, Michael Gokhman, Avshalom Manevich, Nir Ratner, Noam Rozen, Erez Shwartz, Mor Zusman, and Yoav Shoham. Jamba: A hybrid transformer-mamba language model, 2024. URL <https://arxiv.org/abs/2403.19887>.
- Cuiyan Liu, Jianyu Liu, Qiang Zhang, Hui Ci, Xihui Gu, and Aminjon Gulakhmadov. Attribution of ndvi dynamics over the globe from 1982 to 2015. *Remote Sensing*, 14(11):2706, 2022.
- Hao Liu, Wilson Yan, Matei Zaharia, and Pieter Abbeel. World model on million-length video and language with blockwise ringattention, 2024a. URL <https://arxiv.org/abs/2402.08268>.
- Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning, 2023a.
- Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning, 2023b.
- Haotian Liu, Chunyuan Li, Yuheng Li, Bo Li, Yuanhan Zhang, Sheng Shen, and Yong Jae Lee. Llava-next: Improved reasoning, ocr, and world knowledge, January 2024b. URL <https://llava-vl.github.io/blog/2024-01-30-llava-next/>.

- Xiao Liu, Tianjie Zhang, Yu Gu, Iat Long Iong, Yifan Xu, Xixuan Song, Shudan Zhang, Hanyu Lai, Xinyi Liu, Hanlin Zhao, Jiadai Sun, Xinyue Yang, Yu Yang, Zehan Qi, Shuntian Yao, Xueqiao Sun, Siyi Cheng, Qinkai Zheng, Hao Yu, Hanchen Zhang, Wenyi Hong, Ming Ding, Lihang Pan, Xiaotao Gu, Aohan Zeng, Zhengxiao Du, Chan Hee Song, Yu Su, Yuxiao Dong, and Jie Tang. Visualagentbench: Towards large multimodal models as visual foundation agents, 2024c. URL <https://arxiv.org/abs/2408.06327>.
- Yuan Liu, Haodong Duan, Yuanhan Zhang, Bo Li, Songyang Zhang, Wangbo Zhao, Yike Yuan, Jiaqi Wang, Conghui He, Ziwei Liu, Kai Chen, and Dahua Lin. Mmbench: Is your multi-modal model an all-around player?, 2023c.
- Kate Loveys, Matthew Prina, Chloe Axford, Òscar Ristol Domènec, William Weng, Elizabeth Broadbent, Sameer Pujari, Hyobum Jang, Zee A Han, and Jotheeswaran Amuthavalli Thiagarajan. Artificial intelligence for older people receiving long-term care: a systematic review of acceptability and effectiveness studies. *The Lancet Healthy Longevity*, 3(4):e286–e297, 2022.
- Pan Lu, Swaroop Mishra, Tony Xia, Liang Qiu, Kai-Wei Chang, Song-Chun Zhu, Oyvind Tafjord, Peter Clark, and Ashwin Kalyan. Learn to explain: Multimodal reasoning via thought chains for science question answering, 2022.
- Junwei Luo, Zhen Pang, Yongjun Zhang, Tingzhu Wang, Linlin Wang, Bo Dang, Jiangwei Lao, Jian Wang, Jingdong Chen, Yihua Tan, et al. Skysensegpt: A fine-grained instruction tuning dataset and model for remote sensing vision-language understanding. *arXiv preprint arXiv:2406.10100*, 2024.
- OpenAI. Gpt-4 technical report, 2024. URL <https://arxiv.org/abs/2303.08774>.
- Michael Poli, Jue Wang, Stefano Massaroli, Jeffrey Quesnelle, Ryan Carlow, Eric Nguyen, and Armin Thomas. StripedHyena: Moving Beyond Transformers with Hybrid Signal Processing Models, 12 2023. URL <https://github.com/togethercomputer/stripedhyena>.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision, 2021. URL <https://arxiv.org/abs/2103.00020>.
- Noam Shazeer. Glu variants improve transformer, 2020. URL <https://arxiv.org/abs/2002.05202>.
- Dingjie Song, Shunian Chen, Guiming Hardy Chen, Fei Yu, Xiang Wan, and Benyou Wang. Milebench: Benchmarking mllms in long context, 2024. URL <https://arxiv.org/abs/2404.18532>.
- Yuxuan Sun, Yunlong Zhang, Yixuan Si, Chenglu Zhu, Zhongyi Shui, Kai Zhang, Jingxiong Li, Xingheng Lyu, Tao Lin, and Lin Yang. Pathgen-1.6 m: 1.6 million pathology image-text pairs generation through multi-agent collaboration. *arXiv preprint arXiv:2407.00203*, 2024.
- Gemma Team, Thomas Mesnard, Cassidy Hardin, Robert Dadashi, Surya Bhupatiraju, Shreya Pathak, Laurent Sifre, Morgane Rivière, Mihir Sanjay Kale, Juliette Love, Pouya Tafti, Léonard Hussenot, Pier Giuseppe Sessa, Aakanksha Chowdhery, Adam Roberts, Aditya Barua, Alex Botev, Alex Castro-Ros, Ambrose Slone, Amélie Héliou, Andrea Tacchetti, Anna Bulanova, Antonia Paterson, Beth Tsai, Bobak Shahriari, Charline Le Lan, Christopher A. Choquette-Choo, Clément Crepey, Daniel Cer, Daphne Ippolito, David Reid, Elena Buchatskaya, Eric Ni, Eric Noland, Geng Yan, George Tucker, George-Christian Muraru, Grigory Rozhdestvenskiy, Henryk Michalewski, Ian Tenney, Ivan Grishchenko, Jacob Austin, James Keeling, Jane Labanowski, Jean-Baptiste Lespiau, Jeff Stanway, Jenny Brennan, Jeremy Chen, Johan Ferret, Justin Chiu, Justin Mao-Jones, Katherine Lee, Kathy Yu, Katie Millican, Lars Lowe Sjoesund, Lisa Lee, Lucas Dixon, Machel Reid, Maciej Mikula, Mateo Wirth, Michael Sharman, Nikolai Chinaev, Nithum Thain, Olivier Bachem, Oscar Chang, Oscar Wahltinez, Paige Bailey, Paul Michel, Petko Yotov, Rahma Chaabouni, Ramona Comanescu, Reena Jana, Rohan Anil, Ross McIlroy, Ruibo Liu, Ryan Mullins, Samuel L Smith, Sebastian Borgeaud, Sertan Girgin, Sholto Douglas, Shree Pandya, Siamak Shakeri, Soham De, Ted Klimentko, Tom Hennigan, Vlad Feinberg, Wojciech

- Stokowiec, Yu hui Chen, Zafarali Ahmed, Zhitao Gong, Tris Warkentin, Ludovic Peran, Minh Giang, Clément Farabet, Oriol Vinyals, Jeff Dean, Koray Kavukcuoglu, Demis Hassabis, Zoubin Ghahramani, Douglas Eck, Joelle Barral, Fernando Pereira, Eli Collins, Armand Joulin, Noah Fiedel, Evan Senter, Alek Andreev, and Kathleen Kenealy. Gemma: Open models based on gemini research and technology, 2024a. URL <https://arxiv.org/abs/2403.08295>.
- Jamba Team, Barak Lenz, Alan Arazi, Amir Bergman, Avshalom Manevich, Barak Peleg, Ben Aviram, Chen Almagor, Clara Fridman, Dan Padnos, Daniel Gissin, Daniel Jannai, Dor Muhlgay, Dor Zimberg, Edden M Gerber, Elad Dolev, Eran Krakovsky, Erez Safahi, Erez Schwartz, Gal Cohen, Gal Shachaf, Haim Rozenblum, Hofit Bata, Ido Blass, Inbal Magar, Itay Dalmedigos, Jhonathan Osin, Julie Fadlon, Maria Rozman, Matan Danos, Michael Gokhman, Mor Zushman, Naama Gidron, Nir Ratner, Noam Gat, Noam Rozen, Oded Fried, Ohad Leshno, Omer Antverg, Omri Abend, Opher Lieber, Or Dagan, Orit Cohavi, Raz Alon, Ro'i Belson, Roi Cohen, Rom Gilad, Roman Glozman, Shahar Lev, Shaked Meirom, Tal Delbari, Tal Ness, Tomer Asida, Tom Ben Gal, Tom Braude, Uriya Pumerantz, Yehoshua Cohen, Yonatan Belinkov, Yuval Globerson, Yuval Peleg Levy, and Yoav Shoham. Jamba-1.5: Hybrid transformer-mamba models at scale, 2024b. URL <https://arxiv.org/abs/2408.12570>.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurelien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample. Llama: Open and efficient foundation language models, 2023a. URL <https://arxiv.org/abs/2302.13971>.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023b.
- Junyang Wang, Haiyang Xu, Haitao Jia, Xi Zhang, Ming Yan, Weizhou Shen, Ji Zhang, Fei Huang, and Jitao Sang. Mobile-agent-v2: Mobile device operation assistant with effective navigation via multi-agent collaboration. *arXiv preprint arXiv:2406.01014*, 2024.
- Penghao Wu and Saining Xie. V\*: Guided visual search as a core mechanism in multimodal llms. *arXiv preprint arXiv:2312.14135*, 2023a.
- Penghao Wu and Saining Xie. V\*: Guided visual search as a core mechanism in multimodal llms, 2023b. URL <https://arxiv.org/abs/2312.14135>.
- Qingyun Wu, Gagan Bansal, Jieyu Zhang, Yiran Wu, Shaokun Zhang, Erkang Zhu, Beibin Li, Li Jiang, Xiaoyun Zhang, and Chi Wang. Autogen: Enabling next-gen llm applications via multi-agent conversation framework. *arXiv preprint arXiv:2308.08155*, 2023a.
- Shengqiong Wu, Hao Fei, Leigang Qu, Wei Ji, and Tat-Seng Chua. Next-gpt: Any-to-any multimodal llm. *arXiv preprint arXiv:2309.05519*, 2023b.
- Can Xu, Qingfeng Sun, Kai Zheng, Xiubo Geng, Pu Zhao, Jiazhan Feng, Chongyang Tao, and Daxin Jiang. Wizardlm: Empowering large language models to follow complex instructions, 2023. URL <https://arxiv.org/abs/2304.12244>.
- Hanwen Xu, Naoto Usuyama, Jaspreet Bagga, Sheng Zhang, Rajesh Rao, Tristan Naumann, Cliff Wong, Zelalem Gero, Javier González, Yu Gu, et al. A whole-slide foundation model for digital pathology from real-world data. *Nature*, pp. 1–8, 2024a.
- Lin Xu, Yilin Zhao, Daquan Zhou, Zhijie Lin, See Kiong Ng, and Jiashi Feng. Pllava: Parameter-free llava extension from images to videos for video dense captioning. *arXiv preprint arXiv:2404.16994*, 2024b.
- Ruyi Xu, Yuan Yao, Zonghao Guo, Junbo Cui, Zanlin Ni, Chunjiang Ge, Tat-Seng Chua, Zhiyuan Liu, Maosong Sun, and Gao Huang. Llava-uhd: an lmm perceiving any aspect ratio and high-resolution images, 2024c. URL <https://arxiv.org/abs/2403.11703>.
- Fuzhao Xue, Yukang Chen, Dacheng Li, Qinghao Hu, Ligeng Zhu, Xiuyu Li, Yunhao Fang, Haotian Tang, Shang Yang, Zhijian Liu, Ethan He, Hongxu Yin, Pavlo Molchanov, Jan Kautz, Linxi Fan, Yuke Zhu, Yao Lu, and Song Han. Longvila: Scaling long-context visual language models for long videos, 2024. URL <https://arxiv.org/abs/2408.10188>.



- Zhao Yang, Jiaxuan Liu, Yucheng Han, Xin Chen, Zebiao Huang, Bin Fu, and Gang Yu. Appagent: Multimodal agents as smartphone users. *arXiv preprint arXiv:2312.13771*, 2023.
- Weihao Yu, Zhengyuan Yang, Linjie Li, Jianfeng Wang, Kevin Lin, Zicheng Liu, Xinchao Wang, and Lijuan Wang. Mm-vet: Evaluating large multimodal models for integrated capabilities, 2023.
- Xiang Yue, Yuansheng Ni, Kai Zhang, Tianyu Zheng, Ruoqi Liu, Ge Zhang, Samuel Stevens, Dongfu Jiang, Weiming Ren, Yuxuan Sun, Cong Wei, Botao Yu, Ruibin Yuan, Renliang Sun, Ming Yin, Boyuan Zheng, Zhenzhu Yang, Yibo Liu, Wenhao Huang, Huan Sun, Yu Su, and Wenhui Chen. Mmmu: A massive multi-discipline multimodal understanding and reasoning benchmark for expert agi, 2024. URL <https://arxiv.org/abs/2311.16502>.
- Biao Zhang and Rico Sennrich. Root mean square layer normalization, 2019. URL <https://arxiv.org/abs/1910.07467>.
- Hang Zhang, Xin Li, and Lidong Bing. Video-llama: An instruction-tuned audio-visual language model for video understanding. *arXiv preprint arXiv:2306.02858*, 2023. URL <https://arxiv.org/abs/2306.02858>.
- Pan Zhang, Xiaoyi Dong, Yuhang Zang, Yuhang Cao, Rui Qian, Lin Chen, Qipeng Guo, Haodong Duan, Bin Wang, Linke Ouyang, Songyang Zhang, Wenwei Zhang, Yining Li, Yang Gao, Peng Sun, Xinyue Zhang, Wei Li, Jingwen Li, Wenhui Wang, Hang Yan, Conghui He, Xingcheng Zhang, Kai Chen, Jifeng Dai, Yu Qiao, Dahua Lin, and Jiaqi Wang. Internlm-xcomposer-2.5: A versatile large vision language model supporting long-contextual input and output, 2024a. URL <https://arxiv.org/abs/2407.03320>.
- Peiyuan Zhang, Kaichen Zhang, Bo Li, Guangtao Zeng, Jingkang Yang, Yuanhan Zhang, Ziyue Wang, Haoran Tan, Chunyuan Li, and Ziwei Liu. Long context transfer from language to vision, 2024b. URL <https://arxiv.org/abs/2406.16852>.
- Yu Zhang, Ruijie Yu, Kaipeng Zeng, Ding Li, Feng Zhu, Xiaokang Yang, Yaohui Jin, and Yanyan Xu. Text-augmented multimodal llms for chemical reaction condition recommendation, 2024c. URL <https://arxiv.org/abs/2407.15141>.
- Yuanhan Zhang, Bo Li, haotian Liu, Yong jae Lee, Liangke Gui, Di Fu, Jiashi Feng, Ziwei Liu, and Chunyuan Li. Llava-next: A strong zero-shot video understanding model, April 2024d. URL <https://llava-vl.github.io/blog/2024-04-30-llava-next-video/>.
- Han Zhao, Min Zhang, Wei Zhao, Pengxiang Ding, Siteng Huang, and Donglin Wang. Cobra: Extending mamba to multi-modal large language model for efficient inference, 2024a. URL <https://arxiv.org/abs/2403.14520>.
- Tiancheng Zhao, Qianqian Zhang, Kyusong Lee, Peng Liu, Lu Zhang, Chunxin Fang, Jiajia Liao, Kelei Jiang, Yibo Ma, and Ruochen Xu. Omchat: A recipe to train multimodal language models with strong long context and video understanding. *arXiv preprint arXiv:2407.04923*, 2024b.
- Tiancheng Zhao, Qianqian Zhang, Kyusong Lee, Peng Liu, Lu Zhang, Chunxin Fang, Jiajia Liao, Kelei Jiang, Yibo Ma, and Ruochen Xu. Omchat: A recipe to train multimodal language models with strong long context and video understanding, 2024c. URL <https://arxiv.org/abs/2407.04923>.
- Wenting Zhao, Xiang Ren, Jack Hessel, Claire Cardie, Yejin Choi, and Yuntian Deng. Wildchat: 1m chatgpt interaction logs in the wild, 2024d. URL <https://arxiv.org/abs/2405.01470>.
- Zijia Zhao, Haoyu Lu, Yuqi Huo, Yifan Du, Tongtian Yue, Longteng Guo, Bingning Wang, Weipeng Chen, and Jing Liu. Needle in a video haystack: A scalable synthetic framework for benchmarking video mllms, 2024e. URL <https://arxiv.org/abs/2406.09367>.
- Yue Zhou, Litong Feng, Yiping Ke, Xue Jiang, Junchi Yan, Xue Yang, and Wayne Zhang. Towards vision-language geo-foundation model: A survey. *arXiv preprint arXiv:2406.09385*, 2024.
- Yongshuo Zong, Ondrej Bohdal, and Timothy Hospedales. VI-icl bench: The devil in the details of benchmarking multimodal in-context learning, 2024. URL <https://arxiv.org/abs/2403.13164>.

## Appendix Table of Contents

<b>A</b>	<b>Details of Benchmarks</b>	<b>19</b>
<b>B</b>	<b>Details of Single-Image Evaluation</b>	<b>19</b>
B.1	Benchmarks . . . . .	19
B.2	Comparison Models . . . . .	19
B.3	Results Analysis . . . . .	20
<b>C</b>	<b>Multimodal Needle-in-the-aystack Evaluation</b>	<b>20</b>

## A Details of Benchmarks

**Single-image Benchmarks.** We select seven commonly used evaluations to assess the model’s single-image understanding capabilities. These include:

- **GQA** (Hudson & Manning, 2019): A benchmark for real-world visual reasoning and compositional question answering.
- **MME** (Fu et al., 2023): A comprehensive benchmark focused on perception and cognition, from which we use the perception component.
- **MM-Vet** (Yu et al., 2023): Examines six core visual-linguistic (VL) capabilities and sixteen integrations derived from these capabilities.
- **ScienceQA** (Lu et al., 2022): Consists of 4,210 questions across various science topics, with detailed annotations.
- **SEED-Bench-v1** (Li et al., 2023): Evaluates comprehension across twelve dimensions in both image and video modalities; we use the image set.
- **MMBench** (Liu et al., 2023c): A systematically-designed benchmark across twenty ability dimensions.
- **MMMU** (Yue et al., 2024): Tests multi-modal models on multidisciplinary tasks requiring university-level knowledge, covering 183 subfields and 30 types of images.

**Multi-image Benchmarks.** To explore multi-image capabilities, we utilized:

- **MileBench** (Song et al., 2024): Assesses long-context scenario performance, focusing on Temporal, Semantic, and Information Retrieval (IR) components.
- **Video-MME** (Fu et al., 2024a): Covers 30 sub-fields to evaluate video analysis capabilities. We analyze 128 frames extracted uniformly from each video, independent of subtitles.
- **MVBench** (Li et al., 2024d): Addresses 20 challenging video tasks that are not effectively solved with a single frame.

## B Details of Single-Image Evaluation

The single-image evaluation aims to explore the model’s fundamental capabilities and the impact of extended long-context training on single-image understanding.

### B.1 Benchmarks

We utilized a series of benchmarks, including GQA (Hudson & Manning, 2019), MME (Fu et al., 2023), MM-Vet (Yu et al., 2023), ScienceQA (Lu et al., 2022), SEED-Bench-v1 (Li et al., 2023), MMBench (Liu et al., 2023c), and MMMU (Yue et al., 2024). These benchmarks assess various aspects of visual understanding and cognitive processing within a single-image context.

### B.2 Comparison Models

For a comprehensive comparison, we selected three commercial models for the single-image evaluation: GPT-4V<sup>9</sup> (OpenAI, 2024), Gemini-1.5<sup>10</sup> (Google, 2024), and Claude3-Opus<sup>11</sup>. Additionally, we included five open-source models to broaden the scope of evaluation: LLaVA-1.5-13B (Liu et al., 2023b), LLaVA-1.6-13B (Liu et al., 2024b), Phi-3-Vision-4.2B<sup>12</sup> and OmChat-8B (Zhao et al., 2024b).

---

<sup>9</sup>gpt-4-vision-preview

<sup>10</sup>gemini-1.5-flash

<sup>11</sup>claude-3-opus-20240229

<sup>12</sup><https://huggingface.co/microsoft/Phi-3-vision-128k-instruct>

Model	TFLOPs	#Token	GQA	MM-Vet	MME <sup>P</sup>	MMB	MMMU	SQA <sup>I</sup>	SEED <sub>img</sub> <sup>v1</sup>
<b>Proprietary Models</b>									
GPT-4V	-	-	-	67.7	1926.5	<b>81.3</b>	<b>56.8</b>	<b>82.1</b>	<b>69.1</b>
Gemini-1.5	-	-	-	65.8	<b>2148.9</b>	73.6	48.9	81.4	62.9
Claude3-Opus	-	-	-	<b>74.2</b>	1586.8	63.3	54.9	-	42.0
<b>Open-source MLLMs</b>									
OmChat	7.61	576	-	39.6	-	78.8	<b>45.9</b>	-	-
Phi-3-Vision	3.56	576	-	-	-	<b>80.5</b>	40.4	<b>90.8</b>	-
LLaVA-1.6	11.86	576	<b>65.4</b>	<b>44.9</b>	1445.0	70.0	36.2	73.6	<b>71.4</b>
LLaVA-1.5	11.86	576	63.3	36.1	1531.1	67.7	34.4	71.6	68.2
<b>LongLLaVA-9B</b>	1.52	144	62.2	40.5	<b>1630.1</b>	72.6	42.1	75.9	68.9
<b>LongLLaVA-A13B</b>	1.52	144	59.9	35.2	1523.9	63.7	39.2	73.4	65.3

Table 9: Single-image Evaluation. TFLOPs represents the number of floating-point operations required to infer 1 images. The highest scores for proprietary and open-source MLLMs are marked in bold. #Token refers to the token count for one image.

### B.3 Results Analysis

As shown in Table 9, LongLLaVA (single image) generally outperforms LLaVA-1.6-13B, despite both models having the same inference parameter size. This advantage is particularly notable in the MMU benchmarks, highlighting LongLLaVA (single image)’s strengths in handling comprehensive knowledge-based questions. Although LongLLaVA (single image)’s performance is slightly lower compared to some recently emerged high-performing models, it still demonstrates the potential of hybrid architectures in multi-model scenarios. To ensure complete reproducibility of our results, we only focus on four representative public datasets. Additionally, we find that LongLLaVA tends to underperform relative to LongLLaVA (single image). Addressing this issue may require incorporating more single-image data during the Multi-image Instruction-tuning phase.

## C Multimodal Needle-in-the-aystack Evaluation

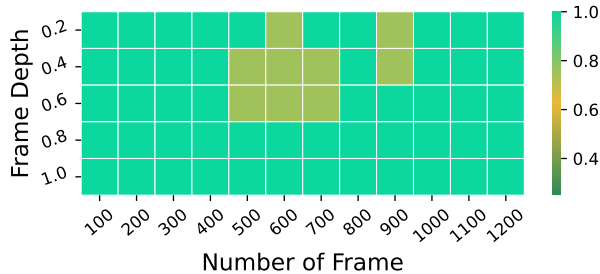


Figure 9: Video-NIAH (Zhang et al., 2024b) evaluated on one A800 80GB GPU.

Using the V-NIAH evaluation framework proposed in LongVA (Zhang et al., 2024b), we conduct a needle-in-the-haystack test to evaluate the model’s performance. As shown in Figure 9, LongLLaVA achieves nearly 100% retrieval accuracy on a set of 1200 images without requiring additional training.