

# GaNDLF-Synth: A Framework to Democratize Generative AI for (Bio)Medical Imaging

Sarthak PATI [HTTPS://ORCID.ORG/0000-0003-2243-8487](https://orcid.org/0000-0003-2243-8487) patis@iu.edu  
 Division of Computational Pathology, Department of Pathology and Laboratory Medicine, Indiana University School of Medicine, Indianapolis, IN, USA  
 Center for Federated Learning, Indiana University School of Medicine, Indianapolis, IN, USA  
 Medical Working Group, MLCommons, San Francisco, CA, USA

Szymon Mazurek <https://orcid.org/0009-0006-7557-0157> szmazurek@agh.edu.pl  
 AGH University of Krakow, Academic Computer Centre Cyfronet, Krakow, Poland

Spyridon Bakas <https://orcid.org/0000-0001-8734-6482> spbakas@iu.edu  
 Division of Computational Pathology, Department of Pathology and Laboratory Medicine, Indiana University School of Medicine, Indianapolis, IN, USA  
 Center for Federated Learning, Indiana University School of Medicine, Indianapolis, IN, USA  
 Indiana University Melvin and Bren Simon Comprehensive Cancer Center, Indianapolis, IN, USA  
 Department of Radiology & Imaging Sciences, Indiana University School of Medicine, Indianapolis, IN, USA  
 Department of Biostatistics & Health Data Science, Indiana University School of Medicine, Indianapolis, IN, USA  
 Department of Neurological Surgery, Indiana University School of Medicine, Indianapolis, IN, USA  
 Department of Computer Science, Luddy School of Informatics, Computing, and Engineering, Indiana University, Indianapolis, IN, USA  
 Medical Working Group, MLCommons, San Francisco, CA, USA

## Abstract

Generative Artificial Intelligence (GenAI) is a field of AI that creates new data samples from existing ones. It utilizes deep learning to overcome the scarcity and regulatory constraints of healthcare data by generating new data points that integrate seamlessly with original datasets. This paper explores the background and motivation for GenAI, and introduces the Generally Nuanced Deep Learning Framework for Synthesis (**GaNDLF-Synth**) to address a significant gap in the literature and move towards democratizing the implementation and assessment of image synthesis tasks in healthcare. GaNDLF-Synth describes a unified abstraction for various synthesis algorithms, including autoencoders, generative adversarial networks, and diffusion models. Leveraging the GANDLF-core framework, it supports diverse data modalities and distributed computing, ensuring scalability and reproducibility through extensive unit testing. The aim of GaNDLF-Synth is to lower the entry barrier for GenAI, and make it more accessible and extensible by the wider scientific community.

**Keywords:** Deep Learning, Synthesis, Generative Artificial Intelligence, Generative Adversarial Networks, Diffusion, Autoencoders, Framework, GaNDLF

## 1. Background

Modern artificial intelligence (AI) techniques, specifically those based on deep learning (DL), are extremely data hungry [Varoquaux and Cheplygina \(2022\)](#); [Baheti et al. \(2022\)](#); [Pati et al. \(2022\)](#). Healthcare data is relatively scarce compared to other types of data (such as those for computer vision [Deng et al. \(2009\)](#)) and is far more tightly regulated [Annas et al. \(2003\)](#); [Voigt and von dem Bussche \(2017\)](#); [Mantri et al. \(2019\)](#). Generative artificial intelligence (GenAI) encompasses a range of AI methods, techniques, and algorithms that are crafted to understand the inherent patterns and structures within a dataset, thus enabling them to

produce new data points that could seamlessly integrate with the original dataset [Epstein et al. \(2023\)](#); [Pinaya et al. \(2023\)](#). GenAI has come to the forefront of usage across various scientific domains, including and not limited to text-to-text, text-to-image, and image-to-image [Cao et al. \(2023\)](#); [Maerten and Soydaner \(2023\)](#); [Bandi et al. \(2023\)](#); [Gupta et al. \(2024\)](#); [Sengar et al. \(2024\)](#). There are a lot of opportunities for using GenAI in healthcare [Zhang and Kamel Boulos \(2023\)](#); [Shokrollahi et al. \(2023\)](#), particularly for imaging, where data, in addition to being scarce, is not readily shared across acquiring sites [Pati et al. \(2022\)](#).

There are multiple applications of GenAI in the context of medical imaging (Table 1). For example, with GenAI, it is a possibility of not using **real** patient imaging data at all and instead only using **synthesized** imaging data for downstream clinical tasks (e.g., using synthesized MRI scans for predicting patient outcomes). This provides increased privacy by alleviating concerns of models leaking training information [Song et al. \(2019\)](#); [Pati et al. \(2024\)](#). GenAI can potentially rectify the situations where there is gross data imbalance, especially for rare diseases, where positive cases are much fewer. GenAI could also potentially address the issue of class imbalance across sites in multi-institutional studies [Pati et al. \(2022, 2024\)](#); [Pati \(2023\)](#); [Pati et al. \(2021a\)](#); [Baid et al. \(2022\)](#); [Foley et al. \(2022\)](#); [Sheller et al. \(2020\)](#). GenAI models can be powerful in terms of learning data distribution in an unsupervised way—such trained architectures can be transferred as feature extractors for other problems, such as classification [Lin et al. \(2017\)](#); [Shrivastava et al. \(2017\)](#). GenAI models can be used as enhancers of data quality, as they can be trained to perform denoising, reconstruction, or super-resolution tasks [Frangi et al. \(2018\)](#). With proper training, there exists a possibility to train a model enabling the generation of different modalities based on some base examples, such as generating PET images (which are ionizing) from MR images (which are non-ionizing) [Dayarathna et al. \(2023\)](#). While such translations are difficult, they can possibly serve as an interesting approximation tool, and they have an added benefit reducing additional radiation to patients.

Table 1: Potential Applications and Benefits of GenAI in Medical Imaging

| Aspect                   | Description  |
|--------------------------|--|
| Data Imbalance           | GenAI can address gross data imbalance, especially for rare diseases, by generating more positive cases. It can also handle class imbalance across sites in multi-institutional studies <a href="#">Sheller et al. (2020)</a> ; <a href="#">Pati et al. (2022)</a> . |
| Unsupervised Learning    | GenAI models can learn data distribution in an unsupervised manner and be transferred as feature extractors for other tasks, such as classification <a href="#">Lin et al. (2017)</a> ; <a href="#">Shrivastava et al. (2017)</a> .                                  |
| Data Quality Enhancement | GenAI models can enhance data quality by performing tasks like denoising, reconstruction, or super-resolution <a href="#">Frangi et al. (2018)</a> .   |
| Modality Generation      | With proper training, GenAI models can generate different imaging modalities from base examples, such as generating PET images from MR <a href="#">Dayarathna et al. (2023)</a> , thus, serving as an approximation tool.  |
| Privacy                  | GenAI can enable the use of synthesized data instead of real patient data, which can increase privacy by reducing the risk of models leaking training information <a href="#">Song et al. (2019)</a> ; <a href="#">Pati et al. (2024)</a> .                          |

Image synthesis approaches can be broadly categorized into three types [Baraheem et al. \(2023\)](#) (an illustration of all these approaches has been shown in [Figure 1](#)):

1. **Autoencoder (AE)**: They are highly versatile, can be used as proxy feature extractors, and are able to learn robust features. At the same time, generating new samples may be difficult, tracking the latent representations is quite difficult, and they may be sensitive to hyper-parameter choice.
2. **Generative Adversarial Network (GAN)**: They can be used to create new samples relatively easily, and the inference is very fast. However, training these models is tricky because it depends a lot on choosing the right hyper-parameters. If not done correctly, the training can fail. Additionally, it needs a lot of data and takes a long time. There is usually no way to include an objective criterion to evaluate the synthetic samples during training.
3. **Diffusion (Diff)**: The images generated from these methods are usually very realistic (and are the current state-of-the-art), and they are simpler to optimize compared to either GANs or AEs. However, they are not very easy to comprehend, training and inference are very slow, and there is usually no way to include an objective criterion to evaluate the synthetic samples.

The current landscape of tools that perform image synthesis is highly limited, with authors preferring to publish their respective (and usually highly specialized) pipelines [Nie et al. \(2017, 2018\)](#); [Shin et al. \(2018\)](#); [Khader et al. \(2022\)](#) instead of any general-purpose tool, or with packages specifically designed for computer vision tasks [Park et al. \(2019\)](#); [Rombach et al. \(2022\)](#). The main reason for this is because computational pipelines for synthesis are highly customized (specific to the task at hand, the computational method, and other properties of the training process). MONAI Generative (MONAI-Gen) [Pinaya et al. \(2023\)](#) is a library that acts as an extension built on top of MONAI [Cardoso et al. \(2022\)](#) for GenAI. To the best of our knowledge, MONAI-Gen is the only cohesive software package that allows users access to a multitude of synthesis algorithms, whereas other approaches are more designed to showcase a single method or approach. However, training models using this library still requires a considerable amount of computational expertise, such as the selection of the appropriate training strategy, model topology, and other hyper-parameters. This level of expertise is usually not present in the healthcare domain. Additionally, it does not support GAN in an easy way, which could provide an important set of algorithms for healthcare (especially considering their propensity for having a built-in discriminator [Kazemian et al. \(2020\)](#); [Singh and Raza \(2021\)](#); [Xun et al. \(2022\)](#); [Chen et al. \(2022\)](#)).

In this manuscript, we present the Generally Nuanced Deep Learning Framework for Synthesis (**GaNDLF-Synth**: [gandlf-synth.org](https://gandlf-synth.org)), general-purpose tool for both the computational and clinical researcher interested in exploring and evaluating various image synthesis approaches for a given task. Since GaNDLF-Synth builds on top of currently available tools and libraries, including MONAI-Gen and GaNDLF-Core [Pati et al. \(2021b, 2023\)](#) ([gandlf.org](https://gandlf.org)), it leverage the power and understanding of the community. Specifically, these could include 1) a lot of current state-of-the-art implementations (MONAI-Gen) [Cardoso et al. \(2022\)](#); [Pinaya et al. \(2023\)](#), 2) distributed compute (DeepSpeed) [Rasley et al.](#)

(2020), 3) diverse data types (GaNDLF-Core) Pati *et al.* (2023), 4) optimization (OpenVINO) Thakur *et al.* (2021), 5) secure containerization (MLCube) Karargyris *et al.* (2023), and 6) direct ties with the Linux Foundation’s OpenFL library for federated learning studies Foley *et al.* (2022).

## 2. Summary

GaNDLF-Synth is designed as a higher-level abstraction supporting synthesis approaches like AE, GANs, and Diff models, enabling users to compare multiple algorithms for the same use case (Table 1) and assess their relative utility. As a Python library extension to GaNDLF, it offers a zero/low code interface, making it accessible to both computational researchers, who benefit from a unified platform for applying novel methods, and clinical researchers, who can train multiple algorithms without coding. GaNDLF-Synth is continuously updated to incorporate the latest synthesis approaches, ensuring it remains a cutting-edge tool for researchers. It can be easily installed from either Git or pip by following the installation instructions in the repository: [github.com/mlcommons/GaNDLF-Synth](https://github.com/mlcommons/GaNDLF-Synth).

## 3. Discussion

In this manuscript, we present **GaNDLF-Synth**, a zero/low-code software package that enables researchers to use GenAI methods without any software development expertise. The zero/low-code approach lowers the entry barrier and offers a high level of unified abstraction for diverse synthesis algorithm pipelines, including AE, GAN, and Diff models. This makes GenAI approachable and extensible for all researchers working in the medical imaging domain, allowing them to easily tackle multiple types of synthesis models (each with highly heterogeneous training mechanisms) for the same data. GaNDLF-Synth is built on general-purpose tools (such as GaNDLF-Core Pati *et al.* (2021b, 2023) and MONAI-Gen Pinaya *et al.* (2023)) it has a wide range of out-of-the-box support for various data processing and different modalities, including radiology and histopathology.

Training any synthesis model requires a great deal of computational expertise, including understanding the model topology and design, choosing the appropriate optimizer and scheduler strategies, and identifying the best metric to use for the task at hand Maier-Hein *et al.* (2024). By ensuring a unified abstraction layer that can communicate with multiple types of synthesis approaches, GaNDLF-Synth alleviates many of these concerns regarding the design of the training pipeline, further democratizing synthesis approaches and making them more accessible to healthcare researchers. Given that synthesis approaches are highly application-specific Elasri *et al.* (2022); Zhan *et al.* (2023), providing researchers with a cohesive pipeline to train multiple approaches enables a more comprehensive analysis of different synthesis methods for their data.

We have validated this tool by leveraging publicly available datasets to train multiple synthesis models. We compared the synthesized images from each of these models with real images using first-order radiomic features. Our analyses show that the synthetic images are very similar in characteristics to the real images. The trained diffusion model approach performed the best for this specific use case, albeit with a significant inference time of

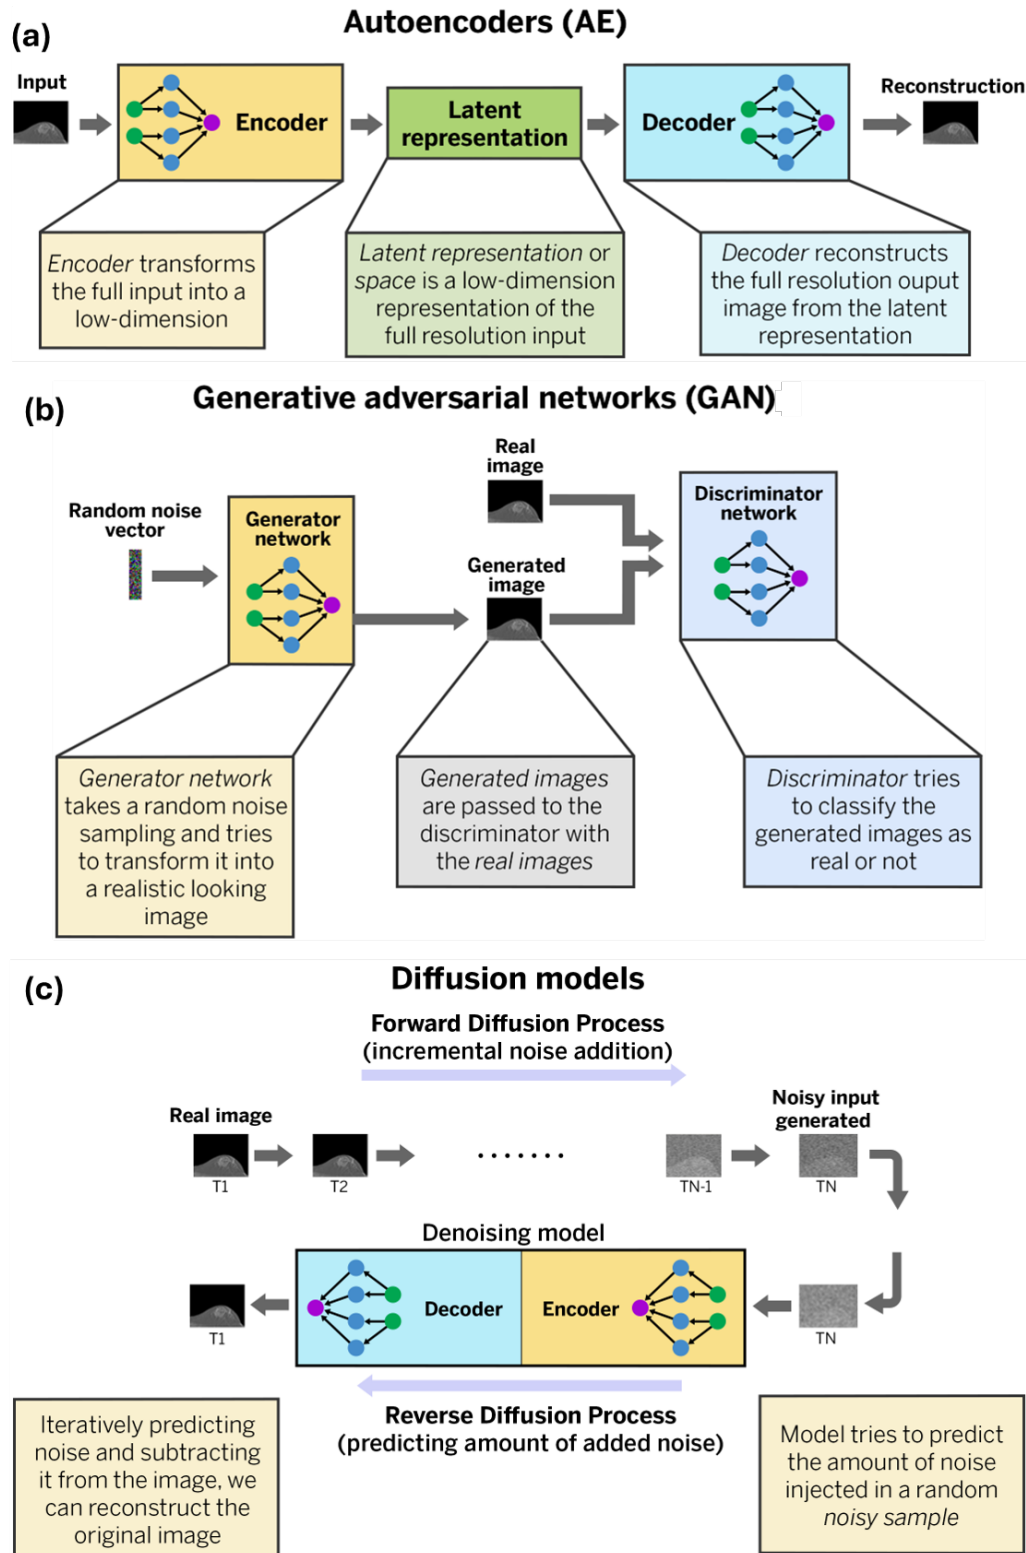


Figure 1: High-level illustrations for (a) Autoencoders (AE), (b) Generative Adversarial networks (GAN), and (c) Diffusion models.

around 312 hours per sample. The autoencoder model performed reasonably well and was much faster, with an inference time of around 1 second per sample.

Finally, by having seamless support for DeepSpeed [Rasley et al. \(2020\)](#), GaNDLF-Synth also enables users to easily perform distributed computing i.e., the ability to utilize a wide array of heterogeneous compute capabilities (such as CPU/GPU on a single node or multiple GPUs on a single or multiple nodes). This can take the form of data parallelism [Li et al. \(2020\)](#) (i.e., splitting the data across multiple accelerator cards, enabling faster training), or model parallelism [Castelló et al. \(2019\)](#); [Zhuang et al. \(2023\)](#) (i.e., splitting the model across multiple accelerator cards, enabling the training of larger models). This enables GaNDLF-Synth to maximize throughput without requiring additional code. Further research is needed to properly quantify the effect of such general-purpose tools on other types of data, such as 3D radiology and histopathology images, as well as non-imaging data.

## 4. Resource Availability

### 4.1 Summary Statement

By enabling training and inference of complex GenAI methods using just text files, GaNDLF-Synth aims to democratize the use of synthesis approaches in healthcare, which has thus far required a significant amount of computational expertise.

### 4.2 Code Location

The GaNDLF-Synth framework showcased in this manuscript is available to use through its public repository: [github.com/mlcommons/GaNDLF-Synth](https://github.com/mlcommons/GaNDLF-Synth).

### 4.3 Potential Use Cases

There are multiple applications of GenAI in healthcare, and some of them are highlighted in [Table 1](#). Essentially, GenAI can be used to generate realistic healthcare imaging data based on a population cohort. The use cases of such techniques can be towards preservation of privacy (where a model for a downstream task is trained on the “synthetic” data as opposed to “real” patient data) as well as to data augmentation (where a model for a downstream task can be augmented with new data to improve its performance). Additionally, as most of the generative models are trained in an unsupervised manner, such models are capable of learning general data distribution properties (such as generating missing parts of images [Kofler et al. \(2023\)](#), or for images affected by motion artefacts [Xue et al. \(2012\)](#)). The pre-trained model blocks can be then fine-tuned for specific tasks (segmentation, classification). This approach is beneficial, especially in the scenario when the data for downstream tasks is scarce.

### 4.4 Licensing

The license used is [Apache 2.0](#).

### 4.5 Ethical Considerations

Fully de-identified and anonymized datasets were used to perform validation of this tool.

The work follows appropriate ethical standards in conducting research and writing the manuscript, following all applicable laws and regulations regarding treatment of animals or human subjects.

## 5. Methods

### 5.1 Software Stack and Flowchart

**GaNDLF-Synth** is built on well-known public libraries, such as PyTorch [Paszke et al. \(2019\)](#), Lightning [Falcon \(2019\)](#), MONAI-Gen [Pinaya et al. \(2023\)](#), and SimpleITK [Lowekamp et al. \(2013\)](#), ensuring the long-term sustainability of the project dependencies. By having GaNDLF [Pati et al. \(2021b, 2023\)](#) as a core dependency, GaNDLF-Synth inherits the majority of the user experience, including the ability to interact with the entire codebase using just text-based YAML files. The data used for training and inference is passed through CSV files. This combination lowers the barrier for users to start gaining experience with synthesis-based models while allowing computational experts to inject reproducibility into their synthesis routines. A high-level illustration of the stack is shown in Figure 2.a.

### 5.2 Functionalities

**GaNDLF-Synth** adopts a zero/low code approach pioneered through its core dependency with GaNDLF [Pati et al. \(2023\)](#), allowing users to configure experiments via YAML files (i.e., structured text files) that are automatically parsed and validated. This removes extensive programming effort on the user side while providing a large degree of flexibility when needed. For example, GaNDLF-Synth streamlines the construction of the data loader (including pre-processing and augmentation routines) by only requiring users to set up the data directory according to the chosen labeling paradigm, and constructing a simple text-based CSV file which provides the input data and the appropriate targets.

GaNDLF-Synth provides a highly customizable abstraction layer for model design which addresses the heterogeneous nature of their various computing pipelines (e.g., AE approaches might need a different set of losses compared to GANs, and Diff models would need iterative noise removal). Additionally, it currently provides end users with a wide library of out-of-the-box models that can be easily used for real-world use cases focused on synthesis. It also offers an easy way to organize and structure code which allows developers and advanced users to include their custom solutions with little overhead. It also enables scalability of experiments by natively supporting distributed training and inference strategies, such as DeepSpeed [Rasley et al. \(2020\)](#) and data distributed parallel.

GaNDLF-Synth supports both unconditional and conditional generation, enabling the creation of models in fully unconditional and conditional setups. It automatically handles output logging, enabling effective metric tracking, and supports highly customizable checkpointing, which is crucial for fault tolerance and portability of trained models. The checkpoints are fully compatible with the Lightning framework format. Additionally, GaNDLF-Synth integrates with popular MLOps [Kreuzberger et al. \(2023\)](#) tools for experiment tracking, both externally hosted like WandB and locally deployed like MLFlow [Alla and Adari \(2021\)](#). An illustration of the workflow is shown in Figure 2.b.

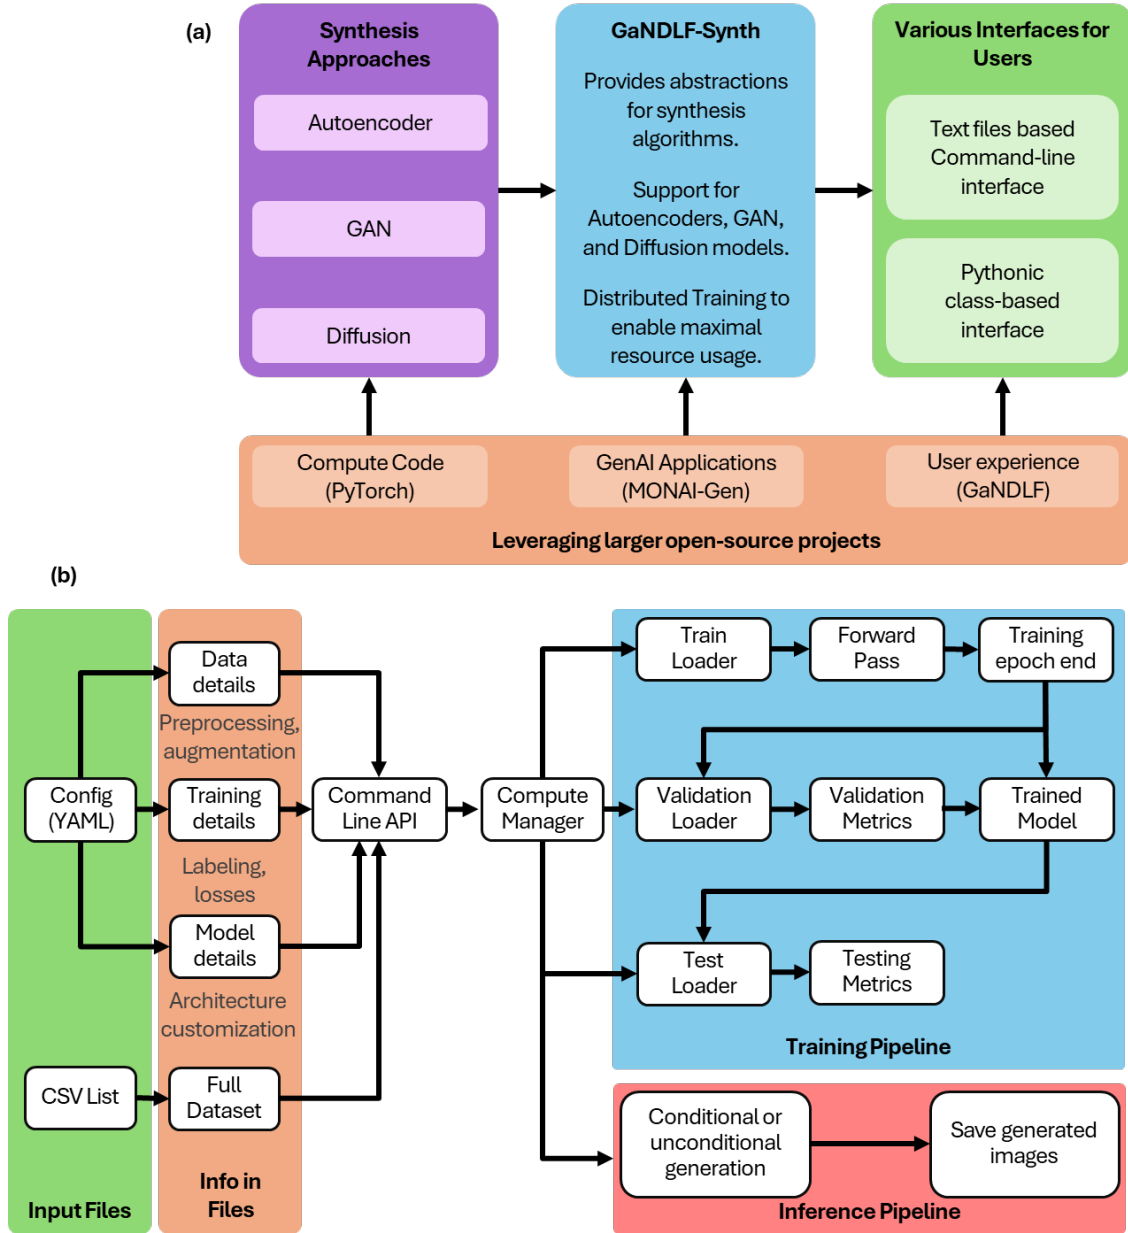


Figure 2: Illustration showcasing the internal components of **GaNDLF-Synth**. (a) is showcasing the software stack, with special focus on the usage of existing functionalities from PyTorch and GaNDLF for compute functionality and user experience, and leveraging a customizable interface to allow easy algorithmic extensions. (b) is showcasing the flowchart depicting the overall training and inference procedure offered in GaNDLF-Synth.



## 6. Validation

### 6.1 Code Reproducibility

All training and inference processes are based on text-based configurations, which can be easily versioned using Git. Samples of various configurations are provided in the repository to facilitate reproducibility and transparency. Additionally, the codebase is comprehensively covered with multiple continuous integration (CI)/continuous deployment (CD) pipelines through GitHub Actions [Kinsman et al. \(2021\)](#); [Saroar and Nayebi \(2023\)](#). Each pull request undergoes rigorous evaluation against existing code coverage and unit tests, ensuring the robustness and reliability of the code.

### Conflicts of Interest

We declare that we do not have any conflicts of interest.

### Acknowledgments

Research reported in this publication was partly supported by the Informatics Technology for Cancer Research (ITCR) program of the National Cancer Institute (NCI) of the National Institutes of Health (NIH) under award numbers U01CA242871 and U24CA279629. The content of this publication is solely the responsibility of the authors and does not represent the official views of the NIH.

This research was supported in part by Lilly Endowment, Inc., through its support for the Indiana University Pervasive Technology Institute.

We gratefully acknowledge Polish high-performance computing infrastructure PLGrid (HPC Center: ACK Cyfronet AGH) for providing computer facilities and support within computational grant no. PLG/2024/017091.

### References

- Sridhar Alla and Suman Kalyan Adari. *Beginning MLOps with MLFlow*. Springer, 2021. ISBN 978-1-4842-6549-9. .
- George J Annas et al. Hipaa regulations-a new era of medical-record privacy? *New England Journal of Medicine*, 348(15):1486–1490, 2003. .
- Bhakti Baheti, Sarthak Pati, Bjoern Menze, and Spyridon Bakas. Leveraging 2d deep learning imagenet-trained models for native 3d medical image analysis. In *International MICCAI Brainlesion Workshop*, pages 68–79. Springer, 2022. .
- Ujjwal Baid, Sarthak Pati, Tahsin M Kurc, Rajarsi Gupta, Erich Bremer, Shahira Abousamra, Siddhesh P Thakur, Joel H Saltz, and Spyridon Bakas. Federated learning for the classification of tumor infiltrating lymphocytes. *arXiv preprint arXiv:2203.16622*, 2022. .

- Ajay Bandi, Pydi Venkata Satya Ramesh Adapa, and Yudu Eswar Vinay Pratap Kumar Kuchi. The power of generative ai: A review of requirements, models, input–output formats, evaluation metrics, and challenges. *Future Internet*, 15(8):260, 2023. .
- Samah Saeed Baraheem, Trung-Nghia Le, and Tam V Nguyen. Image synthesis: a review of methods, datasets, evaluation metrics, and future outlook. *Artificial Intelligence Review*, 56(10):10813–10865, 2023. .
- Yihan Cao, Siyu Li, Yixin Liu, Zhiling Yan, Yutong Dai, Philip S Yu, and Lichao Sun. A comprehensive survey of ai-generated content (aigc): A history of generative ai from gan to chatgpt. *arXiv preprint arXiv:2303.04226*, 2023. .
- M Jorge Cardoso, Wenqi Li, Richard Brown, Nic Ma, Eric Kerfoot, Yiheng Wang, Benjamin Murrey, Andriy Myronenko, Can Zhao, Dong Yang, et al. Monai: An open-source framework for deep learning in healthcare. *arXiv preprint arXiv:2211.02701*, 2022. .
- Adrián Castelló, Manuel F Dolz, Enrique S Quintana-Ortí, and José Duato. Analysis of model parallelism for distributed neural networks. In *Proceedings of the 26th European MPI Users’ Group Meeting*, pages 1–10, 2019. .
- Yizhou Chen, Xu-Hua Yang, Zihan Wei, Ali Asghar Heidari, Nenggan Zheng, Zhicheng Li, Huiling Chen, Haigen Hu, Qianwei Zhou, and Qiu Guan. Generative adversarial networks in medical image augmentation: a review. *Computers in Biology and Medicine*, 144:105382, 2022. .
- Sanuwani Dayarathna, Kh Tohidul Islam, Sergio Uribe, Guang Yang, Munawar Hayat, and Zhaolin Chen. Deep learning based synthesis of mri, ct and pet: Review and analysis. *Medical Image Analysis*, page 103046, 2023. .
- Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *2009 IEEE conference on computer vision and pattern recognition*, pages 248–255. Ieee, 2009. .
- Mohamed Elasri, Omar Elharrouss, Somaya Al-Maadeed, and Hamid Tairi. Image generation: A review. *Neural Processing Letters*, 54(5):4609–4646, 2022. .
- Ziv Epstein, Aaron Hertzmann, Investigators of Human Creativity, Memo Akten, Hany Farid, Jessica Fjeld, Morgan R Frank, Matthew Groh, Laura Herman, Neil Leach, et al. Art and the science of generative ai. *Science*, 380(6650):1110–1111, 2023. .
- William A Falcon. Pytorch lightning. *GitHub*, 3, 2019. . URL <https://github.com/Lightning-AI/lightning>.
- Patrick Foley, Micah J Sheller, Brandon Edwards, Sarthak Pati, Walter Riviera, Mansi Sharma, Prakash Narayana Moorthy, Shih-han Wang, Jason Martin, Parsa Mirhaji, et al. Openfl: the open federated learning library. *Physics in Medicine & Biology*, 67(21):214001, 2022. .
- Alejandro F Frangi, Sotirios A Tsaftaris, and Jerry L Prince. Simulation and synthesis in medical imaging. *IEEE transactions on medical imaging*, 37(3):673–679, 2018. .

- Priyanka Gupta, Bosheng Ding, Chong Guan, and Ding Ding. Generative ai: A systematic review using topic modelling techniques. *Data and Information Management*, page 100066, 2024. .
- Alexandros Karargyris, Renato Umeton, Micah J Sheller, Alejandro Aristizabal, Johnu George, Anna Wuest, Sarthak Pati, Hasan Kassem, Maximilian Zenk, Ujjwal Baid, et al. Federated benchmarking of medical artificial intelligence with medperf. *Nature machine intelligence*, 5(7):799–810, 2023. .
- Salome Kazemina, Christoph Baur, Arjan Kuijper, Bram van Ginneken, Nassir Navab, Shadi Albarqouni, and Anirban Mukhopadhyay. Gans for medical image analysis. *Artificial intelligence in medicine*, 109:101938, 2020. .
- Firas Khader, Gustav Mueller-Franzes, Soroosh Tayebi Arasteh, Tianyu Han, Christoph Haarbuerger, Maximilian Schulze-Hagen, Philipp Schad, Sandy Engelhardt, Bettina Baessler, Sebastian Foersch, et al. Medical diffusion: denoising diffusion probabilistic models for 3d medical image generation. *arXiv preprint arXiv:2211.03364*, 2022. .
- Timothy Kinsman, Mairieli Wessel, Marco A Gerosa, and Christoph Treude. How do software developers use github actions to automate their workflows? In *2021 IEEE/ACM 18th International Conference on Mining Software Repositories (MSR)*, pages 420–431. IEEE, 2021. .
- Florian Kofler, Felix Meissen, Felix Steinbauer, Robert Graf, Eva Oswald, Ezequiel de da Rosa, Hongwei Bran Li, Ujjwal Baid, Florian Hoelzl, Oezguen Turgut, et al. The brain tumor segmentation (brats) challenge 2023: Local synthesis of healthy brain tissue via inpainting. *arXiv preprint arXiv:2305.08992*, 2023. .
- Dominik Kreuzberger, Niklas K uhl, and Sebastian Hirschl. Machine learning operations (mlops): Overview, definition, and architecture. *IEEE access*, 11:31866–31879, 2023. .
- Shen Li, Yanli Zhao, Rohan Varma, Omkar Salpekar, Pieter Noordhuis, Teng Li, Adam Paszke, Jeff Smith, Brian Vaughan, Pritam Damania, et al. Pytorch distributed: Experiences on accelerating data parallel training. *arXiv preprint arXiv:2006.15704*, 2020. .
- Daoyu Lin, Kun Fu, Yang Wang, Guangluan Xu, and Xian Sun. Marta gans: Unsupervised representation learning for remote sensing image classification. *IEEE Geoscience and Remote Sensing Letters*, 14(11):2092–2096, 2017. .
- Bradley C Lowekamp, David T Chen, Luis Ib a nez, and Daniel Blezek. The design of simpleitk. *Frontiers in neuroinformatics*, 7:45, 2013. .
- Anne-Sofie Maerten and Derya Soydaner. From paintbrush to pixel: A review of deep neural networks in ai-generated art. *arXiv preprint arXiv:2302.10913*, 2023. .
- Lena Maier-Hein, Annika Reinke, Patrick Godau, Minu D Tizabi, Florian Buettner, Evangelia Christodoulou, Ben Glocker, Fabian Isensee, Jens Kleesiek, Michal Kozubek, et al. Metrics reloaded: recommendations for image analysis validation. *Nature methods*, 21(2):195–212, 2024. .

- Manisha Mantri, R Rajamenakshi, and Gaur Sunder. Addressing data privacy in digital health: Discussion on policies, regulations and technical standards in india. *THE FUTURES OF EHEALTH*, page 115, 2019. .
- Dong Nie, Roger Trullo, Jun Lian, Caroline Petitjean, Su Ruan, Qian Wang, and Dinggang Shen. Medical image synthesis with context-aware generative adversarial networks. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 417–425. Springer, 2017. .
- Dong Nie, Roger Trullo, Jun Lian, Li Wang, Caroline Petitjean, Su Ruan, Qian Wang, and Dinggang Shen. Medical image synthesis with deep convolutional adversarial networks. *IEEE Transactions on Biomedical Engineering*, 2018. .
- Taesung Park, Ming-Yu Liu, Ting-Chun Wang, and Jun-Yan Zhu. Semantic image synthesis with spatially-adaptive normalization. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 2337–2346, 2019. .
- Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, et al. Pytorch: An imperative style, high-performance deep learning library. In *Advances in neural information processing systems*, pages 8026–8037, 2019. .
- Sarthak Pati. 3.11 federated learning and reproducibility in healthcare. *Inverse Biophysical Modeling and Machine Learning in Personalized Oncology*, page 54, 2023.
- Sarthak Pati, Ujjwal Baid, Maximilian Zenk, Brandon Edwards, Micah Sheller, G Anthony Reina, Patrick Foley, Alexey Gruzdev, Jason Martin, Shadi Albarqouni, et al. The federated tumor segmentation (fets) challenge. *arXiv preprint arXiv:2105.05874*, 2021a. .
- Sarthak Pati, Siddhesh P Thakur, Megh Bhalerao, Spyridon Thermos, Ujjwal Baid, Karol Gotkowski, Camila Gonzalez, Orhun Guley, Ibrahim Ethem Hamamci, Sezgin Er, et al. Gandlf: A generally nuanced deep learning framework for scalable end-to-end clinical workflows in medical imaging. *arXiv preprint arXiv:2103.01006*, 2021b. .
- Sarthak Pati, Ujjwal Baid, Brandon Edwards, Micah Sheller, Shih-Han Wang, G Anthony Reina, Patrick Foley, Alexey Gruzdev, Deepthi Karkada, Christos Davatzikos, et al. Federated learning enables big data for rare cancer boundary detection. *Nature communications*, 13(1):7346, 2022. .
- Sarthak Pati, Siddhesh P Thakur, Ibrahim Ethem Hamamci, Ujjwal Baid, Bhakti Baheti, Megh Bhalerao, Orhun Güley, Sofia Mouchtaris, David Lang, Spyridon Thermos, et al. Gandlf: the generally nuanced deep learning framework for scalable end-to-end clinical workflows. *Communications Engineering*, 2(1):23, 2023. .
- Sarthak Pati, Sourav Kumar, Amokh Varma, Brandon Edwards, Charles Lu, Liangqiong Qu, Justin J Wang, Anantharaman Lakshminarayanan, Shih-han Wang, Micah J Sheller, et al. Privacy preservation for federated learning in health care. *Patterns*, 5(7), 2024. .

- Walter HL Pinaya, Mark S Graham, Eric Kerfoot, Petru-Daniel Tudosiu, Jessica Dafflon, Virginia Fernandez, Pedro Sanchez, Julia Wolleb, Pedro F Da Costa, Ashay Patel, et al. Generative ai for medical imaging: extending the monai framework. *arXiv preprint arXiv:2307.15208*, 2023. .
- Jeff Rasley, Samyam Rajbhandari, Olatunji Ruwase, and Yuxiong He. Deepspeed: System optimizations enable training deep learning models with over 100 billion parameters. In *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, pages 3505–3506, 2020. .
- Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10684–10695, 2022. .
- Sk Golam Saroar and Maleknaz Nayebi. Developers’ perception of github actions: A survey analysis. In *Proceedings of the 27th International Conference on Evaluation and Assessment in Software Engineering*, pages 121–130, 2023. .
- Sandeep Singh Sengar, Affan Bin Hasan, Sanjay Kumar, and Fiona Carroll. Generative artificial intelligence: A systematic review and applications. *arXiv preprint arXiv:2405.11029*, 2024. .
- Micah J Sheller, Brandon Edwards, G Anthony Reina, Jason Martin, Sarthak Pati, Aikaterini Kotrotsou, Mikhail Milchenko, Weilin Xu, Daniel Marcus, Rivka R Colen, et al. Federated learning in medicine: facilitating multi-institutional collaborations without sharing patient data. *Scientific reports*, 10(1):12598, 2020. .
- Hoo-Chang Shin, Neil A Tenenholtz, Jameson K Rogers, Christopher G Schwarz, Matthew L Senjem, Jeffrey L Gunter, Katherine P Andriole, and Mark Michalski. Medical image synthesis for data augmentation and anonymization using generative adversarial networks. In *Simulation and Synthesis in Medical Imaging: Third International Workshop, SASHIMI 2018, Held in Conjunction with MICCAI 2018, Granada, Spain, September 16, 2018, Proceedings 3*, pages 1–11. Springer, 2018. .
- Yasin Shokrollahi, Sahar Yarmohammadtoosky, Matthew M Nikahd, Pengfei Dong, Xianqi Li, and Linxia Gu. A comprehensive review of generative ai in healthcare. *arXiv preprint arXiv:2310.00795*, 2023. .
- Ashish Shrivastava, Tomas Pfister, Oncel Tuzel, Joshua Susskind, Wenda Wang, and Russell Webb. Learning from simulated and unsupervised images through adversarial training. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 2107–2116, 2017. .
- Nripendra Kumar Singh and Khalid Raza. Medical image generation using generative adversarial networks: A review. *Health informatics: A computational perspective in healthcare*, pages 77–96, 2021. .

- Liwei Song, Reza Shokri, and Prateek Mittal. Membership inference attacks against adversarially robust deep learning models. In *2019 IEEE Security and Privacy Workshops (SPW)*, pages 50–56. IEEE, 2019. .
- Siddhesh P Thakur, Sarthak Pati, Ravi Panchumarthy, Deepthi Karkada, Junwen Wu, Dmitry Kurtaev, Chiharu Sako, Prashant Shah, and Spyridon Bakas. Optimization of deep learning based brain extraction in mri for low resource environments. In *International MICCAI Brainlesion Workshop*, pages 151–167. Springer, 2021. .
- Gaël Varoquaux and Veronika Cheplygina. Machine learning for medical imaging: methodological failures and recommendations for the future. *NPJ digital medicine*, 5(1):1–8, 2022. .
- Paul Voigt and Axel von dem Bussche. *The EU General Data Protection Regulation (GDPR): A Practical Guide*. Springer, 2017. ISBN 978-3-031-62328-8.
- Hui Xue, Saurabh Shah, Andreas Greiser, Christoph Guetter, Arne Littmann, Marie-Pierre Jolly, Andrew E Arai, Sven Zuehlsdorff, Jens Guehring, and Peter Kellman. Motion correction for myocardial t1 mapping using image registration with synthetic image estimation. *Magnetic resonance in medicine*, 67(6):1644–1655, 2012. .
- Siyi Xun, Dengwang Li, Hui Zhu, Min Chen, Jianbo Wang, Jie Li, Meirong Chen, Bing Wu, Hua Zhang, Xiangfei Chai, et al. Generative adversarial networks in medical image segmentation: A review. *Computers in biology and medicine*, 140:105063, 2022. .
- Fangneng Zhan, Yingchen Yu, Rongliang Wu, Jiahui Zhang, Shijian Lu, Lingjie Liu, Adam Kortylewski, Christian Theobalt, and Eric Xing. Multimodal image synthesis and editing: A survey and taxonomy. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2023. .
- Peng Zhang and Maged N Kamel Boulos. Generative ai in medicine and healthcare: promises, opportunities and challenges. *Future Internet*, 15(9):286, 2023. .
- Yonghao Zhuang, Lianmin Zheng, Zhuohan Li, Eric Xing, Qirong Ho, Joseph Gonzalez, Ion Stoica, Hao Zhang, and Hexu Zhao. On optimizing the communication of model parallelism. *Proceedings of Machine Learning and Systems*, 5, 2023. .