

SCALING OFFLINE MODEL-BASED RL VIA JOINTLY-OPTIMIZED WORLD-ACTION MODEL PRETRAINING

Jie Cheng^{1,2}, Ruixi Qiao¹, Gang Xiong^{1,2}, Qinghai Miao², Yingwei Ma³,
 Binhua Li³, Yongbin Li^{3*}, Yisheng Lv^{1,2*}

¹State Key Laboratory of Multimodal Artificial Intelligence Systems, CASIA

²Artificial Intelligence, University of Chinese Academy of Sciences

³Alibaba Group

ABSTRACT

A significant aspiration of offline reinforcement learning (RL) is to develop a generalist agent with high capabilities from large and heterogeneous datasets. However, prior approaches that scale offline RL either rely heavily on expert trajectories or struggle to generalize to diverse unseen tasks. Inspired by the excellent generalization of world model in conditional video generation, we explore the potential of image observation-based world model for scaling offline RL and enhancing generalization on novel tasks. In this paper, we introduce JOWA: **J**ointly-**O**ptimized **W**orld-**A**ction model, an offline model-based RL agent pretrained on multiple Atari games to learn general-purpose representation and decision-making ability. Our method jointly optimizes a world-action model through shared transformer backbone, which stabilize temporal difference learning with large models during pretraining. Moreover, we propose an provably efficient and parallelizable planning algorithm to compensate for the Q-value estimation error and thus search out better policies. Experimental results indicate that our largest agent, with 150 million parameters, achieves 78.9% human-level performance on pretrained games using only 10% subsampled offline data, outperforming existing state-of-the-art large-scale offline RL baselines by 31.6% on average. Furthermore, JOWA scales favorably with model capacity and can sample-efficiently transfer to novel games using only 5k offline fine-tuning data corresponding to about 4 trajectories per game, which demonstrates superior generalization of JOWA. We will release codes at <https://github.com/CJReinforce/JOWA>.

1 INTRODUCTION

In recent years, building large-scale generalist models capable of solving multiple tasks has become a dominant research focus in natural language processing (NLP) and multi-modality. Notable examples include large language models (Brown et al., 2020; Ouyang et al., 2022; Touvron et al., 2023; Team et al., 2023) and large vision-language models (Zhu et al., 2023; Liu et al., 2024; Bai et al., 2023), which deliver outstanding performance across a wide range of tasks and adapt quickly to new ones through few-shot or in-context learning. Their success is largely driven by the scaling law (Kaplan et al., 2020), which posits that increasing model size and data leads to improved performance. However, similar scaling trends have not been extensively observed in reinforcement learning (RL).

Unlike in vision and language domains, RL has traditionally favored smaller models tailored to single tasks or multiple tasks within the same environment. Concerningly, previous studies have shown that scaling model capacity can lead to instabilities or performance degradation (Kumar et al., 2020a; Ota et al., 2021; Sokar et al., 2023), explaining the continued dominance of shallow CNN networks in vision-based RL tasks (Mnih, 2013). While some efforts have been made to scale offline RL across multiple tasks (Lee et al., 2022; Reed et al., 2022; Xu et al., 2022; Wu et al., 2024), they predominantly rely on supervised learning (SL) approaches, such as conditional behavior cloning, rather than temporal difference (TD) learning, and heavily rely on large amounts of expert trajectories. Kumar et al. (2023) scaled offline Q-learning using ResNet-based representation network with

*Corresponding authors

separate Q-heads for each game, but this approach only learns generalizable representations and still requires substantial data and gradient steps to adapt to unseen games due to reset of Q-heads during fine-tuning. Therefore, *scaling TD-based offline RL for simultaneous general-purpose representation and decision-making remains a critical challenge*. While Hansen et al. (2024) attempted to address this challenge for continuous control tasks with low-dimensional proprioceptive states using model-based RL, it lacks generalization due to heterogeneous proprioceptors across task domains.

Meanwhile, world model has decoupled from model-based RL and evolved into a distinct research area within computer vision and multi-modality, primarily focusing on conditional video generation (Hong et al., 2022; Blattmann et al., 2023; Yu et al., 2023; Yang et al., 2024). Notably, SORA (Brooks et al., 2024) has demonstrated superior generalization performance as a world simulator through large-scale training of generative models on time-series image data. This motivates our investigation into a compelling question: *“Can image observation-based world model scale offline RL across multiple tasks while enhancing generalization to diverse unseen tasks?”*

To address this question, we introduce JOWA: **J**ointly-**O**ptimized **W**orld-**A**ction model, an offline model-based RL agent pretrained across multiple visual games. Crucially, JOWA unlocks scaling trends and achieves sample-efficient adaption to novel games. By utilizing a shared transformer backbone for both the world model and Q-value criticism, JOWA learns both generalizable representations and decision-making skills. This architecture allows the transformer to absorb gradients back-propagated from both world modeling and TD losses, enabling joint optimization. The world modeling loss acts as a regularizer, stabilizing TD-learning for large models. Additionally, we propose a provably efficient and parallelizable planning algorithm to compensate for the Q-value estimation error, allowing for consistent identification of the optimal policy at inference time and sample-efficient transfer to novel games.

To evaluate the performance of JOWA, we train a single model to play 15 Atari games, similar to Lee et al. (2022); Kumar et al. (2023) but using a reduced yet sufficient dataset of 10M transitions per game—termed as the low-data regime to highlight the data efficiency. This setup presents a significant challenge due to the diverse nature of games, each with unique dynamics, rewards, visuals, and agent embodiments. To further test JOWA’s generalization ability, we perform offline fine-tuning on 5 unseen games, using minimal fine-tuning data.

Our contributions are threefold: First, we introduce JOWA, an offline model-based RL method capable of training a single high-performing generalist agent across multiple Atari games. JOWA attains 78.9% human-level performance on pretrained games using only 10% of the original dataset (Agarwal et al., 2020), outperforming existing state-of-the-art large-scale offline RL baselines by 31.6% on average. Second, we demonstrate that JOWA unlocks scaling trends, with performance improving as model capacity increases. Third, JOWA enables sample-efficient transfer to diverse unseen games with 64.7% DQN-normalized score using only 5k transitions per game. Our ablation studies highlight the significance of two key design features of JOWA: joint optimization and planning, along with other training choices. Due to the extensive training time, we will release all training, evaluation, and fine-tuning codes, as well as model weights, to support future research.

2 RELATED WORK

Offline Reinforcement Learning. Offline RL algorithms learn a policy entirely from the static offline dataset without online interactions. Model-free offline RL incorporates conservatism to mitigate extrapolation error (Jin et al., 2021) primarily through policy constraints (Fujimoto et al., 2019; Kumar et al., 2019; Peng et al., 2019; Nair et al., 2020; Kostrikov et al., 2021; Fujimoto & Gu, 2021) and value regularization (Kumar et al., 2020b). In contrast, model-based offline RL approximates the environment using learned world models and performs conservative policy optimization (Lu et al., 2021; Yu et al., 2020b; 2021; Schrittwieser et al., 2021). While these works focus on single-task settings, our work explores scaling offline model-based RL across diverse, challenging multi-task Atari games (Lee et al., 2022; Kumar et al., 2023; Wu et al., 2024) aiming for sample-efficient transfer to novel games. We employ CQL (Kumar et al., 2020b) to estimate conservative Q-values, leveraging its simplicity and effectiveness on vision-based offline RL tasks.

Mutli-Task Reinforcement Learning. Multi-task reinforcement learning (MTRL) aims to learn a shared policy for diverse tasks, with various approaches proposed in the literature (Teh et al., 2017;

Song et al., 2019; Xu et al., 2020; Yang et al., 2020; Sodhani et al., 2021). A common approach is to formulate the multi-task model as task-condition (Yu et al., 2020a), such as language-conditioned tasks (Lynch & Sermanet, 2020; Ahn et al., 2022; Jang et al., 2022) and goal-conditional RL (Plappert et al., 2018). In multi-task offline RL, conditional sequence modeling approaches based on decision transformer (Chen et al., 2021) or diffusion model (Janner et al., 2022) typically rely on large amounts of expert trajectories (Reed et al., 2022; Xu et al., 2022; Lee et al., 2022; Wu et al., 2024; Hu et al., 2024; He et al., 2024). Beyond conditional behavior cloning (BC) methods, Scaled-QL (Kumar et al., 2023) scales offline Q-learning using a shared feature network across tasks with separate Q-value heads for each task. Our work advances offline TD learning to multi-task settings without task-specific Q-value heads through a jointly-optimized world-action model. Table 1 compares experimental environments and open-source status of multi-task offline RL algorithms. Following Lee et al. (2022); Kumar et al. (2023); Wu et al. (2024), we focus on the multi-game regime, which presents greater challenges due to high-dimensional observations and diverse, stochastic environment dynamics. Due to the prohibitive long training time, we advocate for open-sourcing codes and checkpoints to facilitate progress in this field.

Table 1: Comparison of methods in multi-task offline RL. ♣ and ♠ represent two training paradigms of agents: conditional BC and TD-learning, respectively.

Method	Experimental environment					Open source code		
	Benchmark	Observation space	Action space	Dynamics		Train	Eval	Check-points
				per task	across tasks			
MTDIFF♣ (He et al., 2024)	Meta-World or DMControl	state	continuous	deterministic	same or similar	✓	✓	✗
HarmoDT♣ (Hu et al., 2024)						✓	✓	✗
TD-MPC2♠ (Hansen et al., 2024)						✓	✓	✓
MGDT♣ (Lee et al., 2022)	Atari 2600	pixels	discrete	stochastic	diverse	✗	✓	✓
Elastic DT♣ (Wu et al., 2024)						✓	✓	✗
Scaled-QL♠ (Kumar et al., 2023) ¹						✗	✗	✗
JOWA (ours)♠						✓	✓	✓

3 PRELIMINARIES AND PROBLEM SETUP

3.1 ONLINE DISTRIBUTIONAL RL (C51)

In distributional RL, the distribution Z over returns replaces the Q-value in the Bellman optimality equation. The Q-value is the mean of the value distribution Z that can be computed through a distributional Bellman optimality operator (Bellemare et al., 2017),

$$\mathcal{T}^* Z(s, a) := \frac{D}{\gamma} R(s, a) + \gamma Z(s', \arg \max_{a'} Q(s', a')) \quad (1)$$

where the formula $Y \stackrel{D}{=} U$ denotes equality of probability laws, that is the random variable Y is distributed according to the same law as U . The C51 algorithm (Bellemare et al., 2017) models $Z(s, a)$ using a discrete distribution supported on N fixed atoms $z_1 \leq \dots \leq z_N$ uniformly spaced over a predetermined interval. Given a current value distribution, C51 applies a projection step to map the target distribution onto its finite element support and optimizes as follows:

$$\mathcal{L}_{\text{TD}} = D_{\text{KL}}(\mathcal{T}^* Z_{\theta} - (s, a) \| Z_{\theta}(s, a)) \quad (2)$$

3.2 VALUE REGULARIZATION BASED OFFLINE RL (CQL)

To be conservatism on unseen actions, CQL (Kumar et al., 2020b) introduces a regularizer to the TD-loss, which minimizes Q-values for unseen actions while maximizing Q-values for actions in the dataset to counteract excessive underestimation. The loss function for CQL is given by:

$$\mathcal{L}_{\text{CQL}} = \alpha \left(\mathbb{E}_{s \sim \mathcal{D}} \left[\log \left(\sum_{a'} \exp(Q_{\theta}(s, a')) \right) \right] - \mathbb{E}_{s, a \sim \mathcal{D}} [Q_{\theta}(s, a)] \right) + \mathcal{L}_{\text{TD}} \quad (3)$$

¹Scaled-QL released the preliminary code in <https://tinyurl.com/scaled-ql-code>, which is not run-able out-of-the-box.

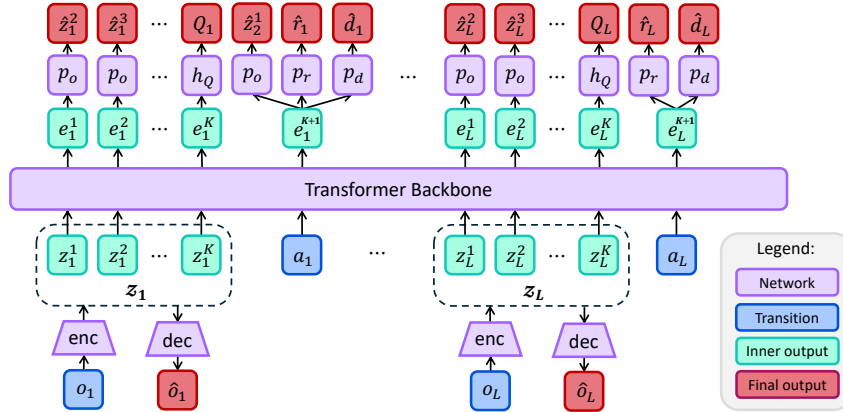


Figure 1: Architecture of JOWA. We use a shared transformer backbone for both world modeling and Q-value criticism to enable joint optimization. VQ-VAE tokenizes images into visual tokens. The sum of vocabulary embeddings, position embeddings and task embeddings forms the input embeddings space for the transformer backbone.

COMBO (Yu et al., 2021), a model-based variant of CQL, uses the following loss function:

$$\begin{aligned} \mathcal{L}_{\text{COMBO}} = & \alpha (\mathbb{E}_{s,a \sim \rho_{\hat{\mathcal{M}}}(s,a)} [Q_{\theta}(s,a)] - \mathbb{E}_{s,a \sim \mathcal{D}} [Q_{\theta}(s,a)]) \\ & + \frac{1}{2} \mathbb{E}_{s,a,s' \sim d_f} \left[(\mathcal{T}^* Q_{\theta}(s,a) - Q_{\theta}(s,a))^2 \right] \end{aligned} \quad (4)$$

where $\hat{\mathcal{M}}$ is the imagined Markovian Decision Process induced by the world model. $\rho_{\hat{\mathcal{M}}}(s,a)$ is the occupancy measure of current policy within $\hat{\mathcal{M}}$. d_f is an f -interpolation between the offline dataset and synthetic rollouts from the world model: $d_f = f d_{\mathcal{D}} + (1-f) d_{\hat{\mathcal{M}}}$, where $f \in [0, 1]$.

3.3 PROBLEM SETUP

We consider a multi-task offline RL problem: given a static dataset of transitions $\mathcal{D} = \{(s_t, a_t, r_t, d_t, s_{t+1})_i\}$ collected from various environments with arbitrary behaviour policies, our goal is to learn a single policy that maximize the expected return $\mathcal{R}_t = \sum_{k \geq t} \gamma^{k-t} r_k$ on all considered environments and can be efficiently fine-tuned to new tasks, where γ is the discount factor.

Considering the computational demands and resource limitations, we use a subset of 15 games from Atari 2600 for training. The whole training process took approximately 12 days on A100 GPUs. Our offline dataset is derived from the the DQN-Replay dataset (Agarwal et al., 2020), which consists of 84×84 grayscale images as observations and a full action space of 18 discrete actions.

4 JOINTLY-OPTIMIZED WORLD-ACTION MODEL

In this section, we first detail the architecture of JOWA and the loss functions for joint optimization in section 4.1. Next, we introduce the provably efficient and parallelizable planning algorithm employed to compensate for the Q-value estimation error in section 4.2. Finally, we present the overall training and sample-efficient fine-tuning pipelines in section 4.3.

4.1 WORLD-ACTION MODEL

4.1.1 ARCHITECTURE

Figure 1 illustrates JOWA’s architecture, which uses a transformer backbone (Vaswani, 2017) to simultaneously learn world dynamics and Q-values across environments. This dual capability is achieved through distinct prediction heads that process the transformer’s output embedding e . The world dynamics are modeled via supervised learning using three heads: next observation token predictor p_o , reward predictor p_r , and termination predictor p_d . The Q-values head h_Q learns the

Q-function through TD-learning, based on implicit representations of historical trajectories. In the following sections, we refer to the $\{\text{transformer}, p_o, p_r, p_d\}$ components as the "world-part" with parameters θ , and the $\{\text{transformer}, h_Q\}$ components as the "action-part" with parameters ϕ .

We use VQ-VAE, a discrete autoencoder, to tokenize image observations, representing high-dimensional images as a sequence of K tokens. The VQ-VAE is trained with an equally weighted combination of L_1 reconstruction loss, commitment loss (Van Den Oord et al., 2017), and perceptual loss (Esser et al., 2021). Then the transformer operates on the interleaved observation and action tokens represented as $(z_0^1, \dots, z_0^K, a_0, \dots, z_L^1, \dots, z_L^K, a_L)$, where L is the maximum timesteps of the trajectory segments. For multi-task learning, we incorporate learnable task embeddings for both observation and action tokens.

4.1.2 TRAINING OF WORLD-PART MODULE

At each timestep t , the world-part module models the following distributions:

$$\text{Dynamics predictor: } \hat{z}_t^k \sim p_o(\hat{z}_t^k | f(z_{\leq t-1}, z_t^{<k}, a_{\leq t-1}, u)) \quad (5)$$

$$\text{Reward predictor: } \hat{r}_t \sim p_r(\hat{r}_t | f(z_{\leq t}, a_{\leq t}, u)) \quad (6)$$

$$\text{Termination predictor: } \hat{d}_t \sim p_d(\hat{d}_t | f(z_{\leq t}, a_{\leq t}, u)) \quad (7)$$

where f represents the transformer backbone, u is the task ID to index the corresponding task embedding, $k \in \{1, \dots, K\}$, and $t \in \{1, \dots, L\}$.

To unify the type of loss functions for balanced training (Vandenhende et al., 2021), we convert scalar rewards to ternary quantities $\{-1, 0, 1\}$ using the sign function. This allows all three predictors to be optimized as classification problems using cross-entropy loss. Given L -timesteps segments sampled from the offline dataset, the loss function for the world-part module is formulated as:

$$\mathcal{L}_{\text{world}}(\theta) = \frac{1}{L} \sum_{t=1}^L \left[\frac{1}{K} \sum_{k=1}^K -\ln p_o(\hat{z}_t^k | f(z_{\leq t-1}, z_t^{<k}, a_{\leq t-1}, u)) - \ln p_r(\hat{r}_t | f(z_{\leq t}, a_{\leq t}, u)) - \ln p_d(\hat{d}_t | f(z_{\leq t}, a_{\leq t}, u)) \right] \quad (8)$$

4.1.3 TRAINING OF ACTION-PART MODULE

We use CQL (Kumar et al., 2020b) for offline TD-learning. To ensure training stability and enhance scaling performance (Farebrother et al., 2024), we employ distributional TD-error (Bellemare et al., 2017) instead of the mean-square TD-error, maintaining consistency with the $\mathcal{L}_{\text{world}}$ loss type.

The action-part module computes the return distribution for all actions given an observation and historical information. For an observation-action pair (o_t, a_t) , the return distribution \mathcal{Z} is formulated as: $\mathcal{Z}(o_t, a_t) = h_Q(f(z_{\leq t}, a_{\leq t}, u))[a_t]$. The value function $Q(o_t, a_t)$ is the mean of $\mathcal{Z}(o_t, a_t)$. Then the loss function for the action-part module is formulated as:

$$\mathcal{L}_{\text{action}}(\phi) = \alpha [\log(\sum_a \exp(Q(o_t, a))) - Q(o_t, a_t)] + D_{\text{KL}}(\mathcal{T}^* \mathcal{Z}^-(o_t, a_t) \| \mathcal{Z}(o_t, a_t)) \quad (9)$$

where \mathcal{T}^* is the distributional Bellman optimality operator defined in Equation (1), and \mathcal{Z}^- is the target distribution computed through a target Q-values head h_{Q^-} .

Therefore, the joint optimization objective for the world-action model is formulated as:

$$\mathcal{L}(\theta, \phi) = \beta \mathcal{L}_{\text{world}}(\theta) + \mathcal{L}_{\text{action}}(\phi) \quad (10)$$

with the coefficient $\beta > 0$. We set $\beta = 0.1$ in our experiments.

Both $\mathcal{L}_{\text{world}}$ and $\mathcal{L}_{\text{action}}$ back-propagate gradients to the transformer. Previous works observed that TD methods suffer from greater instability with larger model size (Kumar et al., 2020a; Sokar et al., 2023). However, through jointly optimizing the world-action model, $\mathcal{L}_{\text{world}}$ serves as a regularizer to stabilize TD-learning in large-scale models. Moreover, the world-part module enables planning at decision time for optimal inference and sample-efficient transfer, detailed in the following sections.

4.2 PARALLELIZABLE PLANNING AT INFERENCE TIME

The world-part module enables planning at decision time to compensate for inaccurate Q-value estimates, allowing JOWA to consistently search out the optimal policy. We model this process as a tree search problem and present a practical, parallelizable search algorithm.

Given an estimated optimal Q-value \hat{Q}^* , a learned world model with dynamic predictor \hat{P} and reward predictor \hat{r} , our objective is to find the optimal action a_0^* maximizing the ground-truth optimal Q-value Q^* , starting from initial state s_0 . To do so, we rewrite the Bellman optimality equation as:

$$Q^*(s_0, a_0) = \max_{\pi_{Q^*}} \mathbb{E}_{\substack{s_1, \dots, s_H \sim P \\ a_1, \dots, a_{H-1} \sim \pi_{Q^*}}} \left[\sum_{t=0}^{H-1} \gamma^t r(s_t, a_t) + \gamma^H \max_{a_H} Q^*(s_H, a_H) \right] \quad (11)$$

where π_{Q^*} is the policy induced by the optimal Q-function. The proof is provided in the Appendix A. For Equation (11), the optimal policy is the greedy policy based on Q^* .

To derive the search objective function, we follow three steps: (i) replace the ground-truth functions in the right side of Equation (11) with estimated or learned functions. (ii) leverage the estimated optimal Q-function \hat{Q}^* to reduce the policy space for search, restricting the actions to those with top- K highest Q-values. Denote the constrained policy space as $\Pi_{\hat{Q}^*}$, where $\forall \pi \in \Pi_{\hat{Q}^*}, \forall s \in \mathcal{S}, \forall a \notin \text{top-}K(\hat{Q}^*(s, \cdot))$, we have $\pi(a|s) = 0$. (iii) maximize over a_0 on both sides of Equation (11) to find the optimal initial action, considering the restriction in the second step. Finally, the resulting objective function is formulated as:

$$\max_{\pi \in \Pi_{\hat{Q}^*}} \mathbb{E}_{\substack{s_1, \dots, s_H \sim \hat{P} \\ a_0, \dots, a_{H-1} \sim \pi}} \left[\underbrace{\sum_{t=0}^{H-1} \gamma^t \hat{r}(s_t, a_t)}_{\text{income-to-date}} + \underbrace{\gamma^H \max_{a_H} \hat{Q}^*(s_H, a_H)}_{\text{income-to-go}} \right] \quad (12)$$

Detailed derivation is provided in the Appendix B. Then we show the error bound of search-based optimal Q-function in Theorem 4.1, with the formal theorem and its proof in Appendix C.

Theorem (Informal) 4.1. *Denote the search-based optimal Q-function as $f(s, a)$. Assume the learned reward function \hat{r} to be L_r -Lipschitz and the estimated optimal Q-function \hat{Q}^* to be L_Q -Lipschitz. Assume the estimation errors of the learned state transition, reward, and Q-value are bounded by $\epsilon_s, \epsilon_r, \epsilon_Q$ respectively. Then we have the error between search-based optimal Q-value $f(s, a)$ and ground-truth optimal Q-value $Q^*(s, a)$ bounded as:*

$$\|f(s, a) - Q^*(s, a)\| \leq \frac{1 - \gamma^H}{1 - \gamma} \epsilon_r + \left(\frac{\gamma - \gamma^H}{1 - \gamma} \epsilon_r + \gamma^H \epsilon_Q \right) \epsilon_s + \gamma^H \epsilon_Q \quad (13)$$

Under the following condition, the search-based optimal Q-function f has an upper error bound no greater than the estimated optimal Q-function \hat{Q}^ :*

$$\frac{1}{1 - \gamma} \epsilon_r + \left(\frac{\gamma}{1 - \gamma} \frac{L_r - \gamma^H L_Q}{1 - \gamma^H} - \frac{L_r - L_Q}{1 - \gamma} \frac{\gamma^H}{1 - \gamma^H} \right) \epsilon_s \leq \epsilon_Q \quad (14)$$

To optimize objective function (12), we interact with the imagined MDP induced by the learned world model using the constrained policy $\pi \in \Pi_{\hat{Q}^*}$ for H steps, starting from s_0 . We then compute the total income (income-to-date plus income-to-go) for all leaf nodes to identify the optimal path. The first edge of this path is the optimal initial action.

We implement this search using beam search, an efficient decoding algorithm common in NLP. At each timestep, we retain only K states with the top- K total income values. The horizon H and beam width K are hyper-parameters, with $K = 1$ or $H = 0$ degenerating to a \hat{Q}^* -based greedy policy. The algorithm calls the world model $K^2(H - 1) + K$ times but only takes H times as long as the forward propagation of the world model due to parallelizability between K beams.

4.3 TRAINING AND FINE-TUNING PIPELINES

Our multi-task offline RL pretraining consists of two stages:

- **Stage 1:** Sample trajectory segments from datasets. Train the VQ-VAE tokenizer using image observations. Train the world-part module using segments with loss (8) for M_1 steps.
- **Stage 2:** Freeze the VQ-VAE tokenizer. Sample segments and jointly optimize the world-action model with loss function (10) for M_2 steps.

We employ this two-stage training approach to stabilize and accelerate the overall training process. In our pretraining experiments, we set $M_1 = 250k$ and $M_2 = 1.5M$, totaling 1.75M gradient steps.

For sample-efficient transfer to unseen games, we adopt a similar two-stage offline fine-tuning pipeline, but unfreeze all components of JOWA in both two stages. In stage 1, we fine-tune JOWA using real data for 3k steps. In stage 2, we enable planning to synthesize high-quality data, using 3/4 batch of real and 1/4 batch of synthetic data with COMBO loss for 7k steps. Detailed fine-tuning protocol is shown in Appendix E.2.

5 EXPERIMENTS

We design our experiments to answer the following questions: **(1)** How does JOWA perform on multi-games in low-data regime? **(2)** Can JOWA effectively leverage higher model capacity? **(3)** Does the pre-trained JOWA sample-efficiently transfer to new games?

5.1 EXPERIMENTAL SETUP

Dataset. We use the Atari trajectory dataset from Agarwal et al. (2020), which contains 50M transitions from each of 5 separate training runs. Due to the prohibitive long training time on full games, we select a subset of 20 games, maintaining the difficulty distribution of full games defined by Gulcehre et al. (2020). These 20 games are introduced in Appendix D. 15 of those games are used for training, and 5 games are held out for OOD generalization experiments. Following Lee et al. (2022); Kumar et al. (2023); Wu et al. (2024), we use data from 2 out of 5 training runs. To investigate performance in low-data regime, we uniformly draw 10% of transitions at random, as per Agarwal et al. (2020); Kumar et al. (2020a), resulting in 10M transitions per game.

Training and Fine-tuning. We implement our world-action model based on GPT-2 (Brown et al., 2020). We train a total of three variants of JOWA: JOWA-150M (150M parameters), JOWA-70M, and JOWA-40M. We set the number of visual tokens K to 36 and sequence length L to 8 game frames, resulting in sequences of 296 tokens. We pretrain all JOWA models on A100 GPUs for 1.75M steps using the AdamW optimizer (Loshchilov & Hutter, 2018) with learning rates of $1 \cdot 10^{-4}$ and $5 \cdot 10^{-5}$ for two stages respectively, and a batch size of 512 for both stages. For fine-tuning on novel games, we train for 10k gradient steps with a batch size of 32 and 5k transitions. We compare JOWA with the following baselines: (i) Multi-Task BC (MTBC) (ii) Multi-Game DT (MGDT) (Lee et al., 2022) (iii) Elastic DT (EDT) Wu et al. (2024) (iv) Scaled-QL (SQL) Kumar et al. (2023). For fair comparison, all methods use the same batch size of 512 and 1.75M gradient steps. The implementation details of all baselines are provided in the Appendix E.1.

Evaluation and Metrics. During evaluation, we set the inverse temperature κ to 10 for EDT and MGDT for expert action inference. We enable planning for JOWA, setting the planning horizon H to 2 for all games and adjust the beam width K base on the size of valid action space of each game. See Appendix E.3 for the detailed evaluation protocol. We measure performance using human normalized scores (HNS) (Mnih et al., 2015), i.e. $(\text{score} - \text{score}_{\text{random}})/(\text{score}_{\text{human}} - \text{score}_{\text{random}})$. To create an aggregate comparison metric across all games, we use inter-quartile mean (IQM) of human-normalized scores, following evaluation best practices proposed in (Agarwal et al., 2021).

More details on hyperparameters, network architecture, algorithm implementation, and protocols for fine-tuning, and evaluation are provided in the Appendix E.

5.2 HOW DOES JOWA PERFORM ON MULTI-GAMES IN LOW-DATA REGIME?

We summarize our main results in Table 2. This table shows the performance of JOWA alongside all best performing sizes of baselines trained with 10% subsampled dataset. MTBC, MGDT, and EDT

Table 2: Returns on the 15 Atari games for best performing sizes of multi-game models trained with the 10% subsampled dataset. Bold numbers indicate the top methods.

Game	Random	Human	MTBC	MGDT	EDT	SQL	JOWA		
			120M	200M	200M	80M	40M	70M	150M
Assault	222.4	742.0	1203.5	1741.5	1915.5	2292	1578.3	1733.9	2302
Atlantis	12850	29028.1	37812.5	2565750	2108166.7	49100	41662.5	570862.5	2690387.5
BeamRider	363.9	16926.5	786	6011.3	4149.8	7023.5	880.3	2547.4	3498
Berzerk	123.7	2630.4	655	444.5	350	312.5	395	441.9	739
Carnival	0	3800	5560	2610	3678.8	1940	4685	4070	5316
Centipede	2090.9	12017	4046.6	4604	3389.9	3650.3	5669.3	4475.6	4677
ChopperCommand	811.0	7387.8	256.3	3300.8	3443.8	853.8	3118.8	2568.8	3812.5
DemonAttack	152.1	1971	2611.3	6549.4	3455.7	7936.5	1233.8	4584.4	3547.8
NameThisGame	2292.3	8049	6045	6610.5	7060	6461.7	7335.6	12706.9	11421
Phoenix	761.4	7242.6	1446.9	5120.5	5320	4961.7	1608.8	5065	5348
Seaquest	68.4	42054.7	120	2720	3160.4	650	1033.1	1490	2725
SpaceInvaders	148	1668.7	605	742.5	513.8	714.4	694.7	969.1	744.7
StarGunner	664.0	10250	1493.8	8625.5	9550	4728.6	5737.5	21231.3	18150
TimePilot	3568	5229.2	762.5	3866.7	2812.5	4072.7	3268.8	3831.3	3669
Zaxxon	32.5	9173.3	0	462.5	325.5	0	0	225	2163
#Superhuman	0	N/A	4	3	4	3	3	4	6
Median HNS	0.000	1.000	0.197	0.391	0.400	0.387	0.360	0.390	0.456
IQM HNS	0.000	1.000	0.329	0.498	0.502	0.420	0.371	0.476	0.789

represent (conditional) behavior cloning methods, while Scaled-QL and JOWA represent Q-learning methods. Despite the constraints on the amount of data, JOWA achieves superior performance with comparable or fewer parameters than baselines. Specifically, JOWA-150M attains an IQM human-normalized score of 78.9% in low-data regime, surpassing MGDT-200M (49.8%) and EDT-200M (50.2%), despite these two models having more parameters and utilizing data augmentation during pretraining. JOWA-70M achieves an IQM human-normalized score of 47.6%, outperforming Scaled-QL-80M (42.0%). JOWA maintains its performance advantage when comparing median human-normalized scores. These results demonstrate JOWA’s sample efficiency in learning from heterogeneous offline data.

5.3 HOW DOES JOWA SCALES WITH MODEL SIZE?

Scaling law depicts the positive correlation between model capacity and performance. Following Lee et al. (2022); Kumar et al. (2023), we investigate JOWA’s ability to leverage higher capacity architectures. For comparison of scaling trends, we establish 2 baselines: (i) MTBC scaled to 34M, 65M and 120M parameters. (ii) MGDT with 40M and 200M parameters. We scale JOWA by increasing the size of the transformer backbone and Q-values heads, resulting in 3 variants with 40M, 70M, and 150M parameters. Figure 2 shows the scaling trends for the 3 algorithms, which demonstrates that JOWA’s performance reliably increases as the model size grows. Although previous works observed that TD-learning suffer from greater instability with larger model size (Lee et al., 2022; Sokar et al., 2023), JOWA scales TD-learning through a scalable transformer architecture and an auxiliary regularization loss $\mathcal{L}_{\text{world}}$ to stabilize the TD-learning in large models. Notably, JOWA exhibits the steepest scaling curve among all algorithms, highlighting the great scalability potential of offline model-based RL.

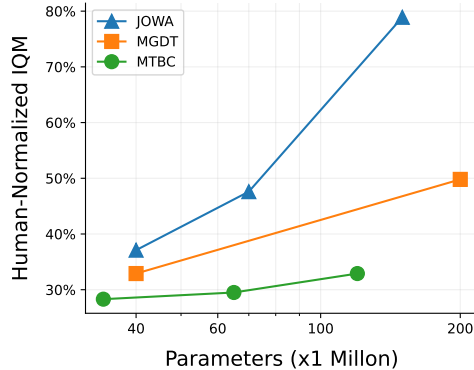


Figure 2: Scaling trends for different algorithms on training set games.

5.4 CAN JOWA SAMPLE-EFFICIENTLY TRANSFER TO NEW GAMES?

Rapid adaptation to downstream tasks is a natural and well-motivated benefit of pretraining. In this section, we study how the pretrained world-action model enables rapid and sample-efficient fine-

Table 3: Fine-tuning performance on unseen games using 5k transitions, measured in terms of DQN-normalized score, following Lee et al. (2022). See Table 17 in Appendix F for raw scores.

Game	MTBC 120M	MGDT 200M	EDT 200M	SQL 80M	JOWA 150M	JOWA-150M (scratch)
Mean	0.164	0.422	0.430	0.360	0.647	0.196
Median	0.215	0.354	0.325	0.284	0.615	0.173
IQM	0.205	0.377	0.380	0.355	0.647	0.181

tuning on new games. To investigate this question, we fine-tune pretrained agents on 5 held-out games using uniformly subsampled 5k expert-level transitions (last 20% of DQN-Replay (Agarwal et al., 2020)) per game as the benchmark. These tiny amounts of transitions corresponding to approximately 4 trajectories from DQN-Replay per fine-tuned game on average, which is similar to the settings of few-shot learning and extremely challenging. For comparison, we fine-tune the largest agents of baselines alongside a no-pretrain baseline, JOWA-150M (scratch) trained on each held-out game from scratch. All pretrained agents are fine-tuned for 10k steps while JOWA-150M (scratch) is trained for 100k gradient steps. Detailed fine-tuning protocol is shown in Appendix E.2. We report results in terms of DQN-normalized score, following Lee et al. (2022); Kumar et al. (2023).

We summarize the fine-tuning results in Table 3. This table shows that the fine-tuned JOWA-150M attains 64.7% IQM DQN-normalized score across 5 held-out games, outperforming baselines by 34.7% on average. These results demonstrates that the learned general-purpose representation and decision-making of JOWA helps rapid and sample-efficient transfer to novel games.

5.5 ABLATION STUDY

In this section, we conduct a series of controlled ablation studies to evaluate the impact of key design choices in JOWA, including planning, different training losses, and architecture designs. These experiments aim to provide empirical evidence to support our design decisions and offer valuable insights for future research in this domain.

Effects of planning at decision time.

We evaluate our 3 variants models with or without planning on the pretrained games and report the IQM aggregated human-normalized score across 15 games in Table 4. Observe that the addition of planning improves 13.5% performance on average and 28.1% on maximum for JOWA-150M. Even without planning, JOWA still demonstrates scaling trends with the growth of parameter size, but at a slower scaling rate.

Table 4: Performance on the 15 Atari games for 3 variants of JOWA evaluated with or without planning reported in terms of the IQM human-normalized score.

	JOWA-150M	JOWA-70M	JOWA-40M
without planning	50.8%	45.1%	27.1%
with planning	78.9%	47.6%	37.1%
improvement (↑)	+28.1%	+2.5%	+10.0%

The subsequent ablation experiments require training from scratch in multi-game regime. For time-saving, we consider a subset of 6 games in the following experiments: Assault, Carnival, Centipede, NameThisGame, Phoenix, SpaceInvaders. We train all models with 10% randomly subsampled data per game for 1M gradient steps and fix the parameter size to 40M.

Table 5: The mean, median, and IQM human-normalized score on the 6 Atari games for various training choices. See Table 18 in Appendix F for raw scores.

Game	Origin	Different training losses				Q-heads ensemble		No task embedding	Synthetic data in pretraining
		No CQL	No $\mathcal{L}_{\text{world}}$	sg($\mathcal{L}_{\text{action}}$)	MSE	Equal	Random		
Mean HNS	1.183	0.613	0.917	0.293	0.189	1.209	1.026	0.964	0.448
Median HNS	1.078	0.696	0.489	0.304	0.118	0.975	0.921	0.721	0.452
IQM HNS	1.123	0.637	0.659	0.307	0.126	1.049	0.931	0.824	0.464

Different training losses. We train models with each of the following 5 loss functions to investigate the impact of each loss term: (i) original loss defined in Equation (10), (ii) No CQL regularization in $\mathcal{L}_{\text{action}}$, which means no conservative constraints, (iii) No $\mathcal{L}_{\text{world}}$, which means training a model-free transformer-based critic network using $\mathcal{L}_{\text{action}}$, (iv) gradients of $\mathcal{L}_{\text{action}}$ not back-propagated to transformer backbone, denoted as sg($\mathcal{L}_{\text{action}}$) for short, which means optimizing

the world model and critic network separately, (v) mean square error (MSE) instead of distributional TD-loss. The results of different training losses are shown in the third main column of Table 5.

Observe that the $\text{sg}(\mathcal{L}_{\text{action}})$ and MSE loss fail to train qualified multi-game agents. We empirically observe that agents trained with MSE TD-loss always over-optimize the CQL regularization term regardless of the value of coefficient α (tested with $\alpha \in \{0.01, 0.05, 0.1\}$), resulting in extreme Q-values for in-domain state-actions and low Q-values for OOD actions. The fail of $\text{sg}(\mathcal{L}_{\text{action}})$ underscores the importance of joint-optimization in the world-action model. Comparing the original loss with the no $\mathcal{L}_{\text{world}}$ configuration demonstrates that scaling model-based multi-game RL is more efficient than model-free RL. Overall, the original loss outperforms all variant losses by a large margin, indicating the effectiveness of every loss terms and their combination proves essential for the overall success of JOWA.

Ensemble of Q-value heads. We run JOWA-40M with ensembled Q-heads, where the Q-distribution is a weighted sum of distributions from multiple Q-heads. The original configuration uses a single Q-head. In this experiment, we set the number of multi Q-heads to 3 and compare 2 ensemble approaches: equal weights or random weights like REM (Agarwal et al., 2020). We report the results in the forth main column of Table 5. Although the equal weighted ensemble slightly outperforms random weights, we have not observed significant improvements of multi Q-heads over single Q-head. We leave the better way of distributional-Q ensemble for future work.

Effects of task embedding. We run JOWA-40M without task embedding, using only the sum of vocabulary embedding and position embedding as input for transformer. We report results in the fifth main column of Table 5. Observe that the addition of task embedding improves 21.9% and 35.7% for mean and median human-normalized score respectively.

Effects of synthetic data in pretraining. By default, we do not use planning or synthetic data during pretraining due to the significant increase in training time (approximately 5 times slower, extending training to over a month). For this ablation study, we enable synthetic data in pretraining for JOWA-40M and train on 6 games for 1M steps with the same batch size and all other hyperparameters, which takes 31 days. Specifically, we sample batch of 4-frames segments and interact in the imagined MDP with ϵ -greedy policy to synthesis the last 4 steps. Then we optimize the world-action model with half batch of real data and half batch of synthetic data using COMBO (Yu et al., 2021) loss in Equation (4) as $\mathcal{L}_{\text{action}}$. The results are shown in the last main column of Table 5.

Suprisingly, we observe negative gains from incorporating synthetic data. We hypothesize twofold reasons: (i) accumulation of inference errors over steps causes synthetic steps to deviate significantly from the ground-truth distribution, (ii) COMBO’s over-penalization of Q-values for unseen state-action pairs results in overly conservative agents. Due to the unbearable training time, further investigation into more effective methods for utilizing synthetic data in multi-game RL pretraining is left for future work.

6 CONCLUSION

In this work, we introduce JOWA: **J**ointly-**O**ptimized **W**orld-**A**ction model, a single offline model-based RL agent capable of playing multiple Atari games. JOWA uses a shared transformer backbone for both the world modeling and the Q-value criticism, enabling joint optimization. We propose a parallelizable planning algorithm to consistently identify the optimal policy during inference. As we hoped, by increasing model parameters, JOWA unlocks scaling trends in performance and exceed prior large-scale offline RL methods in multi-games regime. Furthermore, by training a large-capacity model on a diverse set of games, we show that JOWA can sample-efficiently adapt to novel games, leveraging its generalizable world model for planning. Our ablation studies validate the efficacy of joint optimization and our planning method, while also demonstrating that scaling offline model-based RL is more efficient than offline model-free RL. To facilitate future research, we will release all training and evaluation codes, along with pretrained model checkpoints.

Limitations. Due to the computation resources required, we could not experiment on full Atari 2600 games with complete datasets, as this would take approximately two months of training time. Additionally, while using synthetic data to train agents is common in single-task online model-based RL algorithms, we observe it yields negative gains in multi-game RL pretraining. Therefore, how to effectively use synthetic data for multi-task pretraining is an interesting direction for future work.

REFERENCES

- Rishabh Agarwal, Dale Schuurmans, and Mohammad Norouzi. An optimistic perspective on offline reinforcement learning. In *International conference on machine learning*, pp. 104–114. PMLR, 2020.
- Rishabh Agarwal, Max Schwarzer, Pablo Samuel Castro, Aaron C Courville, and Marc Bellemare. Deep reinforcement learning at the edge of the statistical precipice. *Advances in neural information processing systems*, 34:29304–29320, 2021.
- Michael Ahn, Anthony Brohan, Noah Brown, Yevgen Chebotar, Omar Cortes, Byron David, Chelsea Finn, Chuyuan Fu, Keerthana Gopalakrishnan, Karol Hausman, et al. Do as i can, not as i say: Grounding language in robotic affordances. *arXiv preprint arXiv:2204.01691*, 2022.
- Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou, and Jingren Zhou. Qwen-vl: A frontier large vision-language model with versatile abilities. *arXiv preprint arXiv:2308.12966*, 2023.
- Marc G Bellemare, Will Dabney, and Rémi Munos. A distributional perspective on reinforcement learning. In *International conference on machine learning*, pp. 449–458. PMLR, 2017.
- Andreas Blattmann, Tim Dockhorn, Sumith Kulal, Daniel Mendelevitch, Maciej Kilian, Dominik Lorenz, Yam Levi, Zion English, Vikram Voleti, Adam Letts, et al. Stable video diffusion: Scaling latent video diffusion models to large datasets. *arXiv preprint arXiv:2311.15127*, 2023.
- Tim Brooks, Bill Peebles, Connor Holmes, Will DePue, Yufei Guo, Li Jing, David Schnurr, Joe Taylor, Troy Luhman, Eric Luhman, Clarence Ng, Ricky Wang, and Aditya Ramesh. Video generation models as world simulators. 2024. URL <https://openai.com/research/video-generation-models-as-world-simulators>.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners. In H. Larochelle, M. Ranzato, R. Hadsell, M.F. Balcan, and H. Lin (eds.), *Advances in Neural Information Processing Systems*, volume 33, pp. 1877–1901. Curran Associates, Inc., 2020.
- Lili Chen, Kevin Lu, Aravind Rajeswaran, Kimin Lee, Aditya Grover, Misha Laskin, Pieter Abbeel, Aravind Srinivas, and Igor Mordatch. Decision transformer: Reinforcement learning via sequence modeling. *Advances in neural information processing systems*, 34:15084–15097, 2021.
- Tri Dao, Dan Fu, Stefano Ermon, Atri Rudra, and Christopher Ré. Flashattention: Fast and memory-efficient exact attention with io-awareness. *Advances in Neural Information Processing Systems*, 35:16344–16359, 2022.
- Patrick Esser, Robin Rombach, and Bjorn Ommer. Taming transformers for high-resolution image synthesis. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 12873–12883, 2021.
- Jesse Farebrother, Jordi Orbay, Quan Vuong, Adrien Ali Taïga, Yevgen Chebotar, Ted Xiao, Alex Irpan, Sergey Levine, Pablo Samuel Castro, Aleksandra Faust, et al. Stop regressing: Training value functions via classification for scalable deep rl. *arXiv preprint arXiv:2403.03950*, 2024.
- Scott Fujimoto and Shixiang Shane Gu. A minimalist approach to offline reinforcement learning. *Advances in neural information processing systems*, 34:20132–20145, 2021.
- Scott Fujimoto, David Meger, and Doina Precup. Off-policy deep reinforcement learning without exploration. In *International conference on machine learning*, pp. 2052–2062. PMLR, 2019.
- Caglar Gulcehre, Ziyu Wang, Alexander Novikov, Thomas Paine, Sergio Gómez, Konrad Zolna, Rishabh Agarwal, Josh S Merel, Daniel J Mankowitz, Cosmin Paduraru, et al. RL unplugged: A suite of benchmarks for offline reinforcement learning. *Advances in Neural Information Processing Systems*, 33:7248–7259, 2020.

- Nicklas Hansen, Hao Su, and Xiaolong Wang. Td-mpc2: Scalable, robust world models for continuous control, 2024.
- Haoran He, Chenjia Bai, Kang Xu, Zhuoran Yang, Weinan Zhang, Dong Wang, Bin Zhao, and Xuelong Li. Diffusion model is an effective planner and data synthesizer for multi-task reinforcement learning. *Advances in neural information processing systems*, 36, 2024.
- Wenyi Hong, Ming Ding, Wendi Zheng, Xinghan Liu, and Jie Tang. Cogvideo: Large-scale pre-training for text-to-video generation via transformers. In *The Eleventh International Conference on Learning Representations*, 2022.
- Shengchao Hu, Ziqing Fan, Li Shen, Ya Zhang, Yanfeng Wang, and Dacheng Tao. Harmodt: Harmony multi-task decision transformer for offline reinforcement learning. In *International Conference on Machine Learning*, 2024.
- Eric Jang, Alex Irpan, Mohi Khansari, Daniel Kappler, Frederik Ebert, Corey Lynch, Sergey Levine, and Chelsea Finn. Bc-z: Zero-shot task generalization with robotic imitation learning. In *Conference on Robot Learning*, pp. 991–1002. PMLR, 2022.
- Michael Janner, Yilun Du, Joshua Tenenbaum, and Sergey Levine. Planning with diffusion for flexible behavior synthesis. In *International Conference on Machine Learning*, pp. 9902–9915. PMLR, 2022.
- Ying Jin, Zhuoran Yang, and Zhaoran Wang. Is pessimism provably efficient for offline rl? In *International Conference on Machine Learning*, pp. 5084–5096. PMLR, 2021.
- Justin Johnson, Alexandre Alahi, and Li Fei-Fei. Perceptual losses for real-time style transfer and super-resolution. In *Computer Vision—ECCV 2016: 14th European Conference, Amsterdam, The Netherlands, October 11–14, 2016, Proceedings, Part II 14*, pp. 694–711. Springer, 2016.
- Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models. *arXiv preprint arXiv:2001.08361*, 2020.
- Ilya Kostrikov, Ashvin Nair, and Sergey Levine. Offline reinforcement learning with implicit q-learning. *arXiv preprint arXiv:2110.06169*, 2021.
- Aviral Kumar, Justin Fu, Matthew Soh, George Tucker, and Sergey Levine. Stabilizing off-policy q-learning via bootstrapping error reduction. *Advances in neural information processing systems*, 32, 2019.
- Aviral Kumar, Rishabh Agarwal, Dibya Ghosh, and Sergey Levine. Implicit under-parameterization inhibits data-efficient deep reinforcement learning. In *International Conference on Learning Representations*, 2020a.
- Aviral Kumar, Aurick Zhou, George Tucker, and Sergey Levine. Conservative q-learning for offline reinforcement learning. *Advances in Neural Information Processing Systems*, 33:1179–1191, 2020b.
- Aviral Kumar, Rishabh Agarwal, Xinyang Geng, George Tucker, and Sergey Levine. Offline q-learning on diverse multi-task data both scales and generalizes. *International Conference on Learning Representations*, 2023.
- Kuang-Huei Lee, Ofir Nachum, Mengjiao Sherry Yang, Lisa Lee, Daniel Freeman, Sergio Guadarrama, Ian Fischer, Winnie Xu, Eric Jang, Henryk Michalewski, et al. Multi-game decision transformers. *Advances in Neural Information Processing Systems*, 35:27921–27936, 2022.
- Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. *Advances in neural information processing systems*, 36, 2024.
- Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. In *International Conference on Learning Representations*, 2018.

- Cong Lu, Philip Ball, Jack Parker-Holder, Michael Osborne, and Stephen J Roberts. Revisiting design choices in offline model based reinforcement learning. In *International Conference on Learning Representations*, 2021.
- Corey Lynch and Pierre Sermanet. Language conditioned imitation learning over unstructured data. *arXiv preprint arXiv:2005.07648*, 2020.
- Vincent Micheli, Eloi Alonso, and François Fleuret. Transformers are sample-efficient world models. In *The Eleventh International Conference on Learning Representations*, 2022.
- Volodymyr Mnih. Playing atari with deep reinforcement learning. *arXiv preprint arXiv:1312.5602*, 2013.
- Volodymyr Mnih, Koray Kavukcuoglu, David Silver, Andrei A Rusu, Joel Veness, Marc G Belle-mare, Alex Graves, Martin Riedmiller, Andreas K Fidjeland, Georg Ostrovski, et al. Human-level control through deep reinforcement learning. *nature*, 518(7540):529–533, 2015.
- Ashvin Nair, Abhishek Gupta, Murtaza Dalal, and Sergey Levine. Awac: Accelerating online reinforcement learning with offline datasets. *arXiv preprint arXiv:2006.09359*, 2020.
- Kei Ota, Devesh K Jha, and Asako Kanezaki. Training larger networks for deep reinforcement learning. *arXiv preprint arXiv:2102.07920*, 2021.
- Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35: 27730–27744, 2022.
- Xue Bin Peng, Aviral Kumar, Grace Zhang, and Sergey Levine. Advantage-weighted regression: Simple and scalable off-policy reinforcement learning. *arXiv preprint arXiv:1910.00177*, 2019.
- Matthias Plappert, Marcin Andrychowicz, Alex Ray, Bob McGrew, Bowen Baker, Glenn Powell, Jonas Schneider, Josh Tobin, Maciek Chociej, Peter Welinder, et al. Multi-goal reinforcement learning: Challenging robotics environments and request for research. *arXiv preprint arXiv:1802.09464*, 2018.
- Scott Reed, Konrad Zolna, Emilio Parisotto, Sergio Gomez Colmenarejo, Alexander Novikov, Gabriel Barth-Maron, Mai Gimenez, Yury Sulsky, Jackie Kay, Jost Tobias Springenberg, et al. A generalist agent. *arXiv preprint arXiv:2205.06175*, 2022.
- Julian Schrittwieser, Thomas Hubert, Amol Mandhane, Mohammadamin Barekatain, Ioannis Antonoglou, and David Silver. Online and offline reinforcement learning by planning with a learned model. *Advances in Neural Information Processing Systems*, 34:27580–27591, 2021.
- Shagun Sodhani, Amy Zhang, and Joelle Pineau. Multi-task reinforcement learning with context-based representations. In *International Conference on Machine Learning*, pp. 9767–9779. PMLR, 2021.
- Ghada Sokar, Rishabh Agarwal, Pablo Samuel Castro, and Utku Evci. The dormant neuron phenomenon in deep reinforcement learning. In *International Conference on Machine Learning*, pp. 32145–32168. PMLR, 2023.
- H Francis Song, Abbas Abdolmaleki, Jost Tobias Springenberg, Aidan Clark, Hubert Soyer, Jack W Rae, Seb Noury, Arun Ahuja, Siqi Liu, Dhruva Tirumala, et al. V-mpo: On-policy maximum a posteriori policy optimization for discrete and continuous control. *arXiv preprint arXiv:1909.12238*, 2019.
- Richard S Sutton. Reinforcement learning: An introduction. *A Bradford Book*, 2018.
- Gemini Team, Rohan Anil, Sebastian Borgeaud, Yonghui Wu, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, et al. Gemini: a family of highly capable multimodal models. *arXiv preprint arXiv:2312.11805*, 2023.

- Yee Teh, Victor Bapst, Wojciech M Czarnecki, John Quan, James Kirkpatrick, Raia Hadsell, Nicolas Heess, and Razvan Pascanu. Distral: Robust multitask reinforcement learning. *Advances in neural information processing systems*, 30, 2017.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023.
- Aaron Van Den Oord, Oriol Vinyals, et al. Neural discrete representation learning. *Advances in neural information processing systems*, 30, 2017.
- Simon Vandenhende, Stamatios Georgoulis, Wouter Van Gansbeke, Marc Proesmans, Dengxin Dai, and Luc Van Gool. Multi-task learning for dense prediction tasks: A survey. *IEEE transactions on pattern analysis and machine intelligence*, 44(7):3614–3633, 2021.
- A Vaswani. Attention is all you need. *Advances in Neural Information Processing Systems*, 2017.
- Shengjie Wang, Shaohuai Liu, Weirui Ye, Jiacheng You, and Yang Gao. Efficientzero v2: Mastering discrete and continuous control with limited data. *arXiv preprint arXiv:2403.00564*, 2024.
- Yueh-Hua Wu, Xiaolong Wang, and Masashi Hamaya. Elastic decision transformer. *Advances in Neural Information Processing Systems*, 36, 2024.
- Mengdi Xu, Yikang Shen, Shun Zhang, Yuchen Lu, Ding Zhao, Joshua Tenenbaum, and Chuang Gan. Prompting decision transformer for few-shot policy generalization. In *international conference on machine learning*, pp. 24631–24645. PMLR, 2022.
- Zhiyuan Xu, Kun Wu, Zhengping Che, Jian Tang, and Jieping Ye. Knowledge transfer in multi-task deep reinforcement learning for continuous control. *Advances in Neural Information Processing Systems*, 33:15146–15155, 2020.
- Jiazhi Yang, Shenyuan Gao, Yihang Qiu, Li Chen, Tianyu Li, Bo Dai, Kashyap Chitta, Penghao Wu, Jia Zeng, Ping Luo, et al. Generalized predictive model for autonomous driving. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 14662–14672, 2024.
- Ruihan Yang, Huazhe Xu, Yi Wu, and Xiaolong Wang. Multi-task reinforcement learning with soft modularization. *Advances in Neural Information Processing Systems*, 33:4767–4777, 2020.
- Lijun Yu, Yong Cheng, Kihyuk Sohn, José Lezama, Han Zhang, Huiwen Chang, Alexander G Hauptmann, Ming-Hsuan Yang, Yuan Hao, Irfan Essa, et al. Magvit: Masked generative video transformer. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 10459–10469, 2023.
- Tianhe Yu, Deirdre Quillen, Zhanpeng He, Ryan Julian, Karol Hausman, Chelsea Finn, and Sergey Levine. Meta-world: A benchmark and evaluation for multi-task and meta reinforcement learning. In *Conference on robot learning*, pp. 1094–1100. PMLR, 2020a.
- Tianhe Yu, Garrett Thomas, Lantao Yu, Stefano Ermon, James Y Zou, Sergey Levine, Chelsea Finn, and Tengyu Ma. Mopo: Model-based offline policy optimization. *Advances in Neural Information Processing Systems*, 33:14129–14142, 2020b.
- Tianhe Yu, Aviral Kumar, Rafael Rafailov, Aravind Rajeswaran, Sergey Levine, and Chelsea Finn. Combo: Conservative offline model-based policy optimization. *Advances in neural information processing systems*, 34:28954–28967, 2021.
- Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. Minigpt-4: Enhancing vision-language understanding with advanced large language models. In *The Twelfth International Conference on Learning Representations*, 2023.

A PROOF OF EQUATION (11)

Given the initial state-action pair (s_0, a_0) , the bellman expectation equation (Sutton, 2018) is written as:

$$\begin{aligned} Q^\pi(s_0, a_0) &= \mathbb{E}_{s_1 \sim P(\cdot | s_0, a_0)} [r(s_0, a_0) + \gamma V^\pi(s_1)] \\ &= \mathbb{E}_{\substack{s_1, \dots, s_H \sim P \\ a_1, \dots, a_{H-1} \sim \pi}} \left[\sum_{t=0}^{H-1} \gamma^t r(s_t, a_t) + \gamma^H V^\pi(s_H) \right] \end{aligned} \quad (15)$$

According to the definition of optimal Q-value: $Q^*(s_0, a_0) = \max_\pi Q^\pi(s_0, a_0)$, we have:

$$\begin{aligned} Q^*(s_0, a_0) &= \max_\pi \mathbb{E}_{\substack{s_1, \dots, s_H \sim P \\ a_1, \dots, a_{H-1} \sim \pi}} \left[\sum_{t=0}^{H-1} \gamma^t r(s_t, a_t) + \gamma^H V^\pi(s_H) \right] \\ &= \max_\pi \mathbb{E}_{\substack{s_1, \dots, s_H \sim P \\ a_1, \dots, a_{H-1} \sim \pi}} \left[\sum_{t=0}^{H-1} \gamma^t r(s_t, a_t) + \gamma^H \max_\pi V^\pi(s_H) \right] \\ &= \max_\pi \mathbb{E}_{\substack{s_1, \dots, s_H \sim P \\ a_1, \dots, a_{H-1} \sim \pi}} \left[\sum_{t=0}^{H-1} \gamma^t r(s_t, a_t) + \gamma^H V^*(s_H) \right] \\ &= \max_\pi \mathbb{E}_{\substack{s_1, \dots, s_H \sim P \\ a_1, \dots, a_{H-1} \sim \pi}} \left[\sum_{t=0}^{H-1} \gamma^t r(s_t, a_t) + \gamma^H \max_{a_H} Q^*(s_H, a_H) \right] \end{aligned} \quad (16)$$

For Equation (16), we derive the optimal policy π is the greedy policy selecting actions with the greatest Q*-value:

$$\begin{aligned} Q^*(s_0, a_0) &= \max_\pi \mathbb{E}_{\substack{s_1, \dots, s_H \sim P \\ a_1, \dots, a_{H-1} \sim \pi}} \left[\sum_{t=0}^{H-1} \gamma^t r(s_t, a_t) + \gamma^H \max_{a_H} Q^*(s_H, a_H) \right] \\ &= \max_\pi \mathbb{E}_{\substack{s_1, \dots, s_{H-1} \sim P \\ a_1, \dots, a_{H-2} \sim \pi}} \left[\sum_{t=0}^{H-2} \gamma^t r(s_t, a_t) + \gamma^{H-1} \max_{a_{H-1}} \mathbb{E}_{s_H \sim P} \left[r(s_{H-1}, a_{H-1}) + \gamma \max_{a_H} Q^*(s_H, a_H) \right] \right] \\ &= \max_\pi \mathbb{E}_{\substack{s_1, \dots, s_{H-1} \sim P \\ a_1, \dots, a_{H-2} \sim \pi}} \left[\sum_{t=0}^{H-2} \gamma^t r(s_t, a_t) + \gamma^{H-1} \max_{a_{H-1}} Q^*(s_{H-1}, a_{H-1}) \right] \end{aligned} \quad (17)$$

Therefore, we have $a_{H-1} = \arg \max_a Q^*(s_{H-1}, a)$. Similarly, continuing to use dynamic programming on Equation (17), we finally get: $a_i = \arg \max_a Q^*(s_i, a)$, $(i = 1, 2, \dots, H-1)$. Thus we claim that the optimal policy is induced by the optimal value and use the symbol π_{Q^*} instead of π in Equation (16) to obtain Equation (11).

B DERIVATION FROM EQUATION (11) TO EQUATION (12)

Given the learned dynamic predictor \hat{P} , reward predictor \hat{r} , and estimated optimal Q-value \hat{Q}^* , we first substitute these three functions for the ground-truth functions in the right side of Equation (11):

$$\max_{\pi_{\hat{Q}^*}} \mathbb{E}_{\substack{s_1, \dots, s_H \sim \hat{P} \\ a_1, \dots, a_{H-1} \sim \pi_{\hat{Q}^*}}} \left[\sum_{t=0}^{H-1} \gamma^t \hat{r}(s_t, a_t) + \gamma^H \max_{a_H} \hat{Q}^*(s_H, a_H) \right] \quad (18)$$

However, due to the estimation error between learned functions and ground-truth functions, $\hat{Q}^*(s_t, a_t)$ is typically not equal to $\mathbb{E}_{s_{t+1} \sim \hat{P}} [\hat{r}(s_t, a_t) + \gamma \max_a \hat{Q}^*(s_{t+1}, a)]$. Therefore, instead of using dynamic programming to derive that the optimal policy is the greedy policy as in Proof A, we have to use search to solve formula (18).

However, we can use the conclusion derived with ground-truth functions to make assumptions to reduce the policy space for search. We assume that the optimal policy for formula (18) maps states to actions with top-K highest Q-values. Denote the constrained policy space as $\Pi_{\hat{Q}^*}$, where $\forall \pi \in \Pi_{\hat{Q}^*}, \forall s \in \mathcal{S}, \forall a \notin \text{top-K}(\hat{Q}^*(s, \cdot))$, we have $\pi(a|s) = 0$. We make the following assumption: the optimal policy of formula (18) is in the constrained policy space, i.e., $\pi_{\hat{Q}^*}^* \in \Pi_{\hat{Q}^*}$. Under this assumption, formula (18) is equivalent to:

$$\max_{\pi \in \Pi_{\hat{Q}^*}} \mathbb{E}_{\substack{s_1, \dots, s_H \sim \hat{P} \\ a_1, \dots, a_{H-1} \sim \pi}} \left[\sum_{t=0}^{H-1} \gamma^t \hat{r}(s_t, a_t) + \gamma^H \max_{a_H} \hat{Q}^*(s_H, a_H) \right] \quad (19)$$

Then we maximize formula (19) over a_0 to find the optimal initial action. Considering the above assumption, $a_0 \in \text{top-K}(\hat{Q}^*(s_0, \cdot))$. Thus we have the objective for search as:

$$\max_{\pi \in \Pi_{\hat{Q}^*}} \mathbb{E}_{\substack{s_1, \dots, s_H \sim \hat{P} \\ a_0, \dots, a_{H-1} \sim \pi}} \left[\sum_{t=0}^{H-1} \gamma^t \hat{r}(s_t, a_t) + \gamma^H \max_{a_H} \hat{Q}^*(s_H, a_H) \right] \quad (20)$$

C UPPER BOUND OF SEARCH-BASED Q-VALUE ESTIMATION

Let function $f(s_0, a_0)$ be equal to formula (19) and let $\pi_{\hat{Q}^*}^*$ be the optimal policy of formula (19). We have:

$$f(s_0, a_0) = \mathbb{E}_{\substack{s_1, \dots, s_H \sim \hat{P} \\ a_1, \dots, a_{H-1} \sim \pi_{\hat{Q}^*}^*}} \left[\sum_{t=0}^{H-1} \gamma^t \hat{r}(s_t, a_t) + \gamma^H \max_{a_H} \hat{Q}^*(s_H, a_H) \right] \quad (21)$$

We make the following assumption similar to EfficientZero-v2 (Wang et al., 2024):

Assumption C.1. Assume the state transition, reward, and Q-value estimations error are upper bounded by $\epsilon_s, \epsilon_r, \epsilon_Q$ respectively. The error bound of each estimation is formulated as:

$$\max_{n \in [N], t \in [H(n)]} \mathbb{E} [\|\hat{s}_t - s_t\|] \leq \epsilon_s \quad (22)$$

$$\max_{n \in [N], t \in [H(n)]} \mathbb{E} [\|\hat{r}(s_t) - r(s_t)\|] \leq \epsilon_r \quad (23)$$

$$\max_{n \in [N], t \in [H(n)]} \mathbb{E} [\|\hat{Q}^*(s_t) - Q^*(s_t)\|] \leq \epsilon_Q \quad (24)$$

Theorem C.2. Define s_t, a_t to be the states and actions resulting from current policy using ground-truth dynamics P and reward function r and similarly define \hat{s}_t, \hat{a}_t using learned functions \hat{P} and \hat{r} . Assume the learned reward function \hat{r} to be L_r -Lipschitz and the estimated optimal Q-function \hat{Q}^* to be L_Q -Lipschitz. Assume the estimation errors of learned functions are bounded as in Assumption C.1. Then we have the error between search-based Q-value estimation $f(s_0, a_0)$ and ground-truth Q-value $Q^*(s_0, a_0)$ bounded as:

$$\|f(s_0, a_0) - Q^*(s_0, a_0)\| \leq \frac{1 - \gamma^H}{1 - \gamma} \epsilon_r + \left(\frac{\gamma - \gamma^H}{1 - \gamma} \epsilon_r + \gamma^H \epsilon_Q \right) \epsilon_s + \gamma^H \epsilon_Q \quad (25)$$

Proof.

$$\begin{aligned}
 & \|f(s_0, a_0) - Q^*(s_0, a_0)\| \\
 = & \left\| \mathbb{E} \left[\sum_{t=0}^{H-1} \gamma^t \hat{r}(s'_t, a'_t) + \gamma^H \max_{a_H} \hat{Q}^*(s'_H, a_H) \right] - \mathbb{E} \left[\sum_{t=0}^{H-1} \gamma^t r(s_t, a_t) + \gamma^H \max_{a_H} Q^*(s_H, a_H) \right] \right\| \\
 \leq & \mathbb{E} \left[\left\| \hat{r}(s_0, a_0) - r(s_0, a_0) + \sum_{t=1}^{H-1} \gamma^t (\hat{r}(s'_t, a'_t) - r(s_t, a_t)) + \gamma^H \left(\max_{a_H} \hat{Q}^*(s'_H, a_H) - \max_{a_H} Q^*(s_H, a_H) \right) \right\| \right] \\
 \leq & \mathbb{E} [\|\hat{r}(s_0, a_0) - r(s_0, a_0)\|] + \sum_{t=1}^{H-1} \gamma^t \|\hat{r}(s'_t, a'_t) - r(s_t, a_t)\| + \gamma^H \mathbb{E} \left[\left\| \max_{a_H} \hat{Q}^*(s'_H, a_H) - \max_{a_H} Q^*(s_H, a_H) \right\| \right] \\
 \leq & \epsilon_r + \sum_{t=1}^{H-1} \gamma^t \|\hat{r}(s'_t, a'_t) - r(s_t, a_t)\| + \gamma^H \mathbb{E} \left[\left\| \max_{a_H} \hat{Q}^*(s'_H, a_H) - \max_{a_H} Q^*(s_H, a_H) \right\| \right] \quad (26)
 \end{aligned}$$

For the second term in inequality (26):

$$\begin{aligned}
 & \|\hat{r}(s'_t, a'_t) - r(s_t, a_t)\| \\
 = & \|\hat{r}(s'_t, a'_t) - \hat{r}(s_t, a_t) + \hat{r}(s_t, a_t) - r(s_t, a_t)\| \\
 \leq & \|\hat{r}(s'_t, a'_t) - \hat{r}(s_t, a_t)\| + \|\hat{r}(s_t, a_t) - r(s_t, a_t)\| \\
 \leq & L_r \|s'_t - s_t\| + \epsilon_r \\
 \leq & L_r \epsilon_s + \epsilon_r \quad (27)
 \end{aligned}$$

For the third term in inequality (26), let $a_H^1 = \arg \max_{a_H} \hat{Q}^*(s'_H, a_H)$ and $a_H^2 = \arg \max_{a_H} Q^*(s_H, a_H)$. Then we have:

$$\begin{aligned}
 & \mathbb{E} \left[\left\| \max_{a_H} \hat{Q}^*(s'_H, a_H) - \max_{a_H} Q^*(s_H, a_H) \right\| \right] \\
 = & \mathbb{E} \left[\left\| \hat{Q}^*(s'_H, a_H^1) - Q^*(s_H, a_H^2) \right\| \right] \\
 = & \mathbb{E} \left[\left\| \hat{Q}^*(s'_H, a_H^1) - \hat{Q}^*(s_H, a_H^2) + \hat{Q}^*(s_H, a_H^2) - Q^*(s_H, a_H^2) \right\| \right] \\
 \leq & \mathbb{E} \left[\left\| \hat{Q}^*(s'_H, a_H^1) - \hat{Q}^*(s_H, a_H^2) \right\| \right] + \mathbb{E} \left[\left\| \hat{Q}^*(s_H, a_H^2) - Q^*(s_H, a_H^2) \right\| \right] \\
 \leq & L_Q \|s'_H - s_H\| + \epsilon_Q \\
 \leq & L_Q \epsilon_s + \epsilon_Q \quad (28)
 \end{aligned}$$

Substitute inequalities (27) and (28) into (26):

$$\begin{aligned}
 & \|f(s_0, a_0) - Q^*(s_0, a_0)\| \\
 \leq & \epsilon_r + \sum_{t=1}^{H-1} \gamma^t (L_r \epsilon_s + \epsilon_r) + \gamma^H (L_Q \epsilon_s + \epsilon_Q) \\
 = & \frac{1 - \gamma^H}{1 - \gamma} \epsilon_r + \left(\frac{\gamma - \gamma^H}{1 - \gamma} \epsilon_r + \gamma^H \epsilon_Q \right) \epsilon_s + \gamma^H \epsilon_Q \quad (29)
 \end{aligned}$$

□

Analysis. We expect the search-based Q-values $f(s, a)$ have an upper error bound no greater than the estimated Q-values $\hat{Q}^*(s, a)$, which is formulated as the following inequality:

$$\frac{1 - \gamma^H}{1 - \gamma} \epsilon_r + \left(\frac{\gamma - \gamma^H}{1 - \gamma} \epsilon_r + \gamma^H \epsilon_Q \right) \epsilon_s + \gamma^H \epsilon_Q \leq \epsilon_Q \quad (30)$$

Based on inequality (30), we derive the following condition:

$$\frac{1}{1-\gamma}\epsilon_r + \left(\frac{\gamma}{1-\gamma} \frac{L_r - \gamma^H L_Q}{1-\gamma^H} - \frac{L_r - L_Q}{1-\gamma} \frac{\gamma^H}{1-\gamma^H} \right) \epsilon_s \leq \epsilon_Q \quad (31)$$

The inequality (31) means that if the weighted sum of rewards estimation error ϵ_r and state transition estimation error ϵ_s are less than or equal to the Q-values estimation error ϵ_Q , then the search-based optimal Q-values have a lower upper-bound of error than estimated optimal Q-values.

D GAMES

We select 20 Atari games maintaining the difficulty distribution of full Atari 2600 games defined by Gulcehre et al. (2020), which includes 9 easy games, 9 medium games, and 2 hard games. We use 15 out of 18 games for training and the remaining 5 for OOD generalization experiments. The 15 training games are: Phoenix, Centipede, SpaceInvaders, Carnival, NameThisGame, Assault, Atlantis, DemonAttack, BeamRider, ChopperCommand, Seaquest, TimePilot, StarGunner, Berzerk, Zaxxon. The 5 held-out games are: Pong, Robotank, YarsRevenge, Gravitar, MsPacman. Details about the size of action spaces and game difficulties are shown in Table 6.

Table 6: Atari Games: Name, Game difficulty, Action Space, and Type.

Game	Difficulty	Action Space	Type
Assault	Medium	7	Train
Atlantis	Hard	18	Train
BeamRider	Medium	9	Train
Berzerk	Hard	18	Train
Carnival	Medium	6	Train
Centipede	Medium	18	Train
ChopperCommand	Easy	18	Train
DemonAttack	Easy	6	Train
Gravitar	Easy	18	Fine-tune
MsPacman	Medium	9	Fine-tune
NameThisGame	Easy	6	Train
Phoenix	Easy	8	Train
Pong	Medium	6	Fine-tune
Robotank	Medium	18	Fine-tune
Seaquest	Easy	18	Train
SpaceInvaders	Easy	6	Train
StarGunner	Medium	18	Train
TimePilot	Easy	10	Train
YarsRevenge	Medium	18	Fine-tune
Zaxxon	Easy	18	Train

E EXPERIMENTAL DETAILS

E.1 IMPLEMENT DETAILS

E.1.1 JOWA

We implement JOWA based on the codes of IRIS (Micheli et al., 2022)¹. We train the tokenizer VQ-VAE using the following loss function:

$$\mathcal{L}(E, D, \mathcal{E}) = \|x - D(z)\|_1 + \|\text{sg}(E(x)) - \mathcal{E}(z)\|_2^2 + \|\text{sg}(\mathcal{E}(z)) - E(x)\|_2^2 + \mathcal{L}_{\text{perceptual}}(x, D(z))$$

where E, D, \mathcal{E} are encoder, decoder, and embedding table respectively. $\text{sg}(\cdot)$ is the stop-gradient operator. The last term is the perceptual loss (Johnson et al., 2016). We list the hyperparameters of VQ-VAE in Table 7 and 8. After the first stage of training, the VQ-VAE is frozen.

¹<https://github.com/eloialonso/iris>

Table 7: Encoder / Decoder hyperparameters. We list the hyperparameters for the encoder, the same ones apply for the decoder.

Hyperparameter	Value
Frame dimensions (h, w)	84×84
Layers	3
Residual blocks per layer	2
Channels in convolutions	64
Self-attention layers at resolution	6 / 12

Table 8: Embedding table hyperparameters.

Hyperparameter	Value
Vocabulary size	2048
Tokens per frame (K)	36
Token embedding dimension	512

In addition to the vocabulary embedding and position embedding, we add a learnable task embedding for observation tokens and action tokens respectively. Our transformer are based on minGPT² with FlashAttention (Dao et al., 2022) for acceleration. The hyperparameters of JOWA’s transformer backbone are listed in Table 9 and 10.

Table 9: Same hyperparameters of transformer for 3 JOWA variants.

Hyperparameter	Value
max sequence tokens	296
dropout rate	0.1

The observation predictor, reward predictor, and terminal predictor are 2-layers MLP. The Q-heads are MLP with dropout, layer normalization, and Mish activations from Hansen et al. (2024). The hyperparameters of Q-heads for JOWA are shown in Table 11. The training hyperparameters of JOWA are shown in Table 12.

E.1.2 MTBC

We implement MTBC based on JOWA. We remove the observation predictor, reward predictor, and terminal predictor. We change the output dimension of Q-heads to 18 and train the heads as a 18-class classification problem. All hyperparameters are kept the same as JOWA.

E.1.3 EDT

We use the official code for EDT³. We implement EDT-200M based on the architecture configuration of MGDT-200M, which is shown in Table 13. We change the batch size to 512 and keep other hyperparameters the same as its original configuration. We enable data augmentation (random cropping and random rotation) for EDT.

E.1.4 MGDT

We implement MGDT based on the codes of EDT. We use $\{o_{t+i}, R_{t+i}, a_{t+i}, r_{t+i}\}_{i=0}^3$ as the input sequences, remove the expectile regression loss \mathcal{L}_{\max} and observation prediction loss $\mathcal{L}_{\text{observation}}$, and add the reward prediction loss to rewrite the codes of EDT into MGDT. We enable data augmentation (random cropping and random rotation) for MGDT. The hyperparameters of transformer for two MGDT variants are listed in Table 13.

²<https://github.com/karpathy/minGPT>

³<https://github.com/kristery/Elastic-DT>

Table 10: Different hyperparameters of transformer for 3 JOWA variants.

Model	Layers	Hidden size	Heads	Params
JOWA-40M	4	512	8	37.87M
JOWA-70M	6	768	12	72.11M
JOWA-150M	12	768	12	146.54M

Table 11: Hyperparameters of Q-heads for 3 JOWA variants.

Model	Layers	MLP Hidden dimension	Number of heads	Dropout
JOWA-40M	3	768	1	0.01
JOWA-70M	3	1024	1	0.01
JOWA-150M	3	1792	3	0.01

E.1.5 SCALED-QL

We implement a pytorch version of Scaled-QL from scratch, referring to the jax version of its official preliminary codes⁴. We use ResNet-101 as the representation backbone, followed by 3-layers MLP with 1024 hidden neurons and an output layer. We replace the batch normalization in ResNet with group normalization and use a learnable spatial embeddings to aggregate the outputs of the ResNet instead of global mean pooling. Before the output layer, we normalize the feature e as $\frac{e}{\|e\|^2}$. The training hyperparameters of Scaled-QL are listed in Table 14.

For fair comparison, all methods are trained with the same batch size of 512 for 1.75M gradient steps.

E.2 FINE-TUNING PROTOCOL

We uniformly draw 5k transitions from expert level DQN-Replay (Agarwal et al., 2020) (last 20% of the original dataset) for each held-out game. Each game was fine-tuned separately to measure the model’s transfer performance for a fixed game. we fine-tuned all methods using a batch size of 32 and learning rate of 0.00005 for 10k gradient steps. For reporting results, we report the performance of the agent snapshot that obtain the highest score during fine-tuning.

For JOWA in the second fine-tuning stage, we set both the planning horizon and the beam width to 2 for all fine-tuning experiments. Thus we sample batch of 6-steps segments, using planning

⁴<https://tinyurl.com/scaled-ql-code>

Table 12: Training hyperparameters of JOWA.

Hyperparameter	Value
Optimizer (VQ-VAE)	Adam
Optimizer (except VQ-VAE)	AdamW
Learning rate (VQ-VAE)	0.0001
Learning rate (except VQ-VAE, stage 1)	0.0001
Learning rate (except VQ-VAE, stage 2)	0.00005
Batch size (VQ-VAE)	2048
Batch size (except VQ-VAE)	512
Weight decay (except VQ-VAE)	0.01
Gradient clip	1.0
Discount factor (γ)	0.99
Target Q update frequency	1000
Distributional Q	[-10, 30]
Number of atoms	51
Coefficient of CQL (α)	0.1
Coefficient of $\mathcal{L}_{\text{world}}$ (β)	0.1

Table 13: Hyperparameters of transformer for 2 MGDT variants.

Model	Layers	Hidden size	Heads
MGDT-40M	6	768	12
MGDT-200M	10	1280	20

Table 14: Training hyperparameters of Scaled-QL.

Hyperparameter	Value
Optimizer	Adam
Learning rate	0.0002
Batch size	512
Gradient clip	1.0
Discount factor (γ)	0.99
Target Q update frequency	2000
Distributional Q	[-20, 20]
Number of atoms	51
Coefficient of CQL (α)	0.05
n-step returns	3

Table 15: Evaluation settings of Atari.

Hyperparameter	Value
Sticky actions	No
Grey-scaling	True
Observation down-sampling	(84, 84)
Frames stacked	4
Frame skip (Action repetitions)	4
Terminal condition	Game Over
Max frames per episode	108K
Evaluation noise ϵ_{eval}	0.001

algorithm to synthesis the last 2 steps. Then we update JOWA with 3/4 batch (24) of real data and 1/4 batch (8) of synthetic data using COMBO loss rather than CQL loss. For other baselines, we enable random cropping and random rotation for data augmentation.

E.3 EVALUATION PROTOCOL

For all methods, each game score is calculated by averaging over 16 model rollout episode trials. To reduce inter-trial variability, we do not use sticky actions during evaluation following Lee et al. (2022); Kumar et al. (2023). Following standard protocols on Atari, we evaluate a noised version of the policy with an epsilon-greedy scheme, with $\epsilon_{\text{eval}} = 0.001$. The evaluation settings of Atari are shown in Table 15.

For the expert action inference of MGD and EDT, we set the inverse temperature κ to 10. For the planning of JOWA, we set the planning horizon H to 2 for all games. The beam width are set according to the size of valid action space of each game. Specifically, we set beam width K to 2 if the valid action space size is less than 10, otherwise we set K in $\{3, 4\}$. The planning hyperparameters for each game are shown in Table 16.

Table 16: Planning hyperparameters of JOWA during evaluation.

Game	planning horizon	beam width	Action space
Assault	2	2	7
Atlantis	2	3	18
BeamRider	2	2	9
Berzerk	2	4	18
Carnival	2	2	6
Centipede	2	4	18
ChopperCommand	2	4	18
DemonAttack	2	2	6
NameThisGame	2	2	6
Phoenix	2	2	8
Seaquest	2	3	18
SpaceInvaders	2	2	6
StarGunner	2	3	18
TimePilot	2	3	10
Zaxxon	2	3	18

F RAW SCORES

We summarize the raw scores of fine-tuning and ablation studies in Table 17 and 18 respectively.

Table 17: Offline fine-tuning performance on unseen games using 5k transitions, measured in terms of DQN-normalized score, following Lee et al. (2022); Kumar et al. (2023).

Game	Random	DQN	MTBC 120M	MGDT 200M	EDT 200M	SQL 80M	JOWA 150M	JOWA-150M (scratch)
Gravitar	173.0	473.0	35.7	250.0	253.3	137.5	273.3	83.3
MsPacman	307.3	3085.6	905.0	1290.3	1210.7	1040.2	2016.7	786.7
Pong	-20.7	19.5	5.8	9.7	11.3	13.7	17.7	8.8
Robotank	2.2	63.9	6.8	16.0	15.5	19.7	25.0	11.0
YarsRevenge	3092.9	18089.9	7987.5	10886.3	11276.9	10838.5	17506.2	6507.0
Mean	0.000	1.000	0.164	0.422	0.430	0.360	0.647	0.196
Median	0.000	1.000	0.215	0.354	0.325	0.284	0.615	0.173
IQM	0.000	1.000	0.205	0.377	0.380	0.355	0.647	0.181

Table 18: Raw scores on the 6 Atari games for various training choices. The mean, median, and IQM human-normalized score are shown in the last 3 rows and the best scores are marked in bold.

Game	Origin	Different training losses				Q-heads ensemble		No task embedding	Synthetic data in pretraining
		No CQL	No \mathcal{L}_{world}	sg(\mathcal{L}_{action})	MSE	Equal	Random		
Assault	1423.5	857.9	1650	452.7	637.6	1628.8	1258.6	1428.5	655.7
Carnival	5560	4144.6	5560	2120	620	5154.3	4160	5974.2	3492.9
Centipede	5018.9	1494.1	8146	5568.7	4097.3	5592.5	6450	3725.4	3253
NameThisGame	12208.1	9307.1	4407.3	2108.8	1315	12148.6	9420	7700	5080
Phoenix	4740	140	2036.7	1920	1190	4610	4941.7	4020	193.3
SpaceInvaders	1201.7	605	323.4	539.3	260	958.4	1283.3	575.4	786.3
Mean HNS	1.183	0.613	0.917	0.293	0.189	1.209	1.026	0.964	0.448
Median HNS	1.078	0.696	0.489	0.304	0.118	0.975	0.921	0.721	0.452
IQM HNS	1.123	0.637	0.659	0.307	0.126	1.049	0.931	0.824	0.464