
MOREL: ENHANCING ADVERSARIAL ROBUSTNESS THROUGH MULTI-OBJECTIVE REPRESENTATION LEARNING

Sedjro Salomon Hotegni, Sebastian Peitz

Safe Autonomous Systems, TU Dortmund, Germany

Lamarr Institute for Machine Learning and Artificial Intelligence

{salomon.hotegni, sebastian.peitz}@tu-dortmund.de

ABSTRACT

Extensive research has shown that deep neural networks (DNNs) are vulnerable to slight adversarial perturbations—small changes to the input data that appear insignificant but cause the model to produce drastically different outputs. In addition to augmenting training data with adversarial examples generated from a specific attack method, most of the current defense strategies necessitate modifying the original model architecture components to improve robustness or performing test-time data purification to handle adversarial attacks. In this work, we demonstrate that strong feature representation learning during training can significantly enhance the original model’s robustness. We propose MOREL, a multi-objective feature representation learning approach, encouraging classification models to produce similar features for inputs within the same class, despite perturbations. Our training method involves an embedding space where cosine similarity loss and multi-positive contrastive loss are used to align natural and adversarial features from the model encoder and ensure tight clustering. Concurrently, the classifier is motivated to achieve accurate predictions. Through extensive experiments, we demonstrate that our approach significantly enhances the robustness of DNNs against white-box and black-box adversarial attacks, outperforming other methods that similarly require no architectural changes or test-time data purification. Our code is available at <https://github.com/salomonhotegni/MOREL>.

1 INTRODUCTION

The deployment of deep neural networks (DNNs) in critical vision applications such as autonomous driving and medical diagnosis (Bojarski et al., 2016; Miotto et al., 2018) underscores the need for robust models capable of reliably handling real-world scenarios. However, extensive research has demonstrated that DNNs are vulnerable to adversarial examples—inputs crafted by adding imperceptible perturbations that can cause the model to make incorrect predictions with high confidence (Nguyen et al., 2015; Szegedy et al., 2013; Goodfellow et al., 2014). This vulnerability poses significant challenges to the security and reliability of AI systems, especially in safety-critical environments. To mitigate the risks posed by adversarial attacks, various defense strategies have been proposed. A common approach is adversarial training (Madry et al., 2017), where models are trained on adversarial examples generated from a specific attack method. In addition, to improve robustness, most existing defenses require modifications to the original model architecture (Panousis et al., 2021; Liu et al., 2024; Mohammed et al., 2024; Zhou et al., 2023), introducing additional complexity and often being architecture-dependent. Some approaches also involve test-time data purification (Meng & Chen, 2017; Song et al., 2017; Cohen & Giryes, 2024; Tang & Zhang, 2024), which increases latency, limiting their practical applicability.

In this paper, we propose a novel method named Multi-Objective REpresentation Learning (MOREL) that addresses these challenges by focusing on robust feature representation learning. MOREL encourages the model to produce consistent features for inputs within the same class, despite adversarial perturbations. By enhancing the robustness of feature representations, MOREL strengthens the model’s inherent ability to differentiate between classes, making it more resilient to

adversarial attacks. The core of our approach is a multi-objective optimization framework that simultaneously optimizes two key objectives: enhancing adversarial robustness and maintaining high classification accuracy. We achieve this by embedding natural and adversarial features into a lower-dimensional space, where cosine similarity and contrastive loss functions are applied to align and tightly cluster these features. The classifier is concurrently motivated to achieve accurate predictions. This approach ensures that the model’s learned representations are robust to adversarial perturbations while preserving the information necessary for accurate classification. The embedding space used during training is discarded, allowing the model to retain its original structure and computational efficiency during inference. This characteristic distinguishes MOREL from many existing defense strategies that either involve architectural changes or rely on additional modules during inference. Through extensive experiments (Sec. 4), we demonstrate that our approach significantly enhances the robustness of DNN models against white-box and black-box adversarial attacks, outperforming existing adversarial training methods that similarly require no architectural changes or test-time data purification, in terms of the accuracy-robustness trade-off. In summary, our key contributions are:

- We propose Multi-Objective REpresentation Learning (MOREL), a framework that enhances the robustness of deep neural networks by aligning natural and adversarial features in a shared embedding space during training while preserving the model’s original structure for practical deployment.
- We approach the challenge of improving adversarial robustness and maintaining high accuracy as a multi-objective optimization task, effectively balancing these objectives to enhance the accuracy-robustness trade-off.
- We demonstrate through extensive experiments that models trained with MOREL outperform those trained with existing adversarial training methods, supporting our hypothesis that strong feature representation learning enhances model robustness.

2 RELATED WORK

2.1 ADVERSARIAL TRAINING

Adversarial training, introduced by Madry et al. (2017), has emerged as one of the most effective defenses against adversarial attacks. The core idea involves augmenting the training data with adversarial examples generated using methods like Projected Gradient Descent (PGD). While standard adversarial training has proven effective against known attacks, it often results in models becoming overly specialized to the specific types of adversarial examples used during training (Tsipras et al., 2018). To address this limitation, several variants of adversarial training have been proposed. Kannan et al. (2018) introduced Adversarial Logit Pairing (ALP), which enhances robustness by pairing logits from adversarial and clean examples during training. Building on this, they proposed Clean Logit Pairing (CLP), which further refines the approach by focusing specifically on randomly selected clean training examples. Ding et al. (2018) advanced the field with Max-Margin Adversarial (MMA) training, which pushes decision boundaries further from data points, thereby offering enhanced robustness. The TRADES method by Zhang et al. (2019) marked a significant leap forward by explicitly balancing the trade-off between robustness and accuracy through a regularized loss function that minimizes the Kullback-Leibler divergence between predictions on natural and adversarial examples. This was further refined by MART Wang et al. (2019), which focuses on the robustness of misclassified examples, addressing vulnerabilities near the decision boundary. Despite these advancements, common limitations persist, including the challenge of maintaining strong robustness while achieving high accuracy on clean data. Building on these state-of-the-art adversarial training methods, our approach, MOREL, addresses these challenges by strengthening the robustness of DNNs through a robust feature representation learning technique. By considering a multi-objective optimization framework, MOREL aims to achieve the best possible trade-offs between robustness and accuracy—an aspect that, to our knowledge, has not been fully explored in previous work.

2.2 INSIGHTS FROM CONTRASTIVE LEARNING

To enhance the learning of robust features in the context of adversarial training, our method also draws insights from recent advances in contrastive learning. Contrastive learning has been shown to be effective in producing robust and well-structured feature representations by encouraging similar

samples to be closer in the embedding space while pushing dissimilar samples apart (Chen et al., 2020; Gidaris et al., 2018; He et al., 2020). Specifically, Khosla et al. (2020) extend the principles of contrastive learning to a supervised setting. This method leverages label information to group similar examples (i.e., those sharing the same class label) closer together in the feature space. This work informs the design of our embedding space in MOREL, where we apply a multi-positive contrastive loss function (Khosla et al., 2020; Tian et al., 2024) to align natural and adversarial features. By doing so, MOREL not only enhances robustness against adversarial attacks but also ensures that the learned features are tightly clustered and well-separated across different classes, improving both robustness and accuracy.

3 METHODS

We consider a supervised classification problem where a DNN model f parameterized by $\theta \in \Omega$ learns to map an input image $x \in \mathbb{R}^d$ to a target class $f(x) = y \in \{1, \dots, c\}$ where $c \in \mathbb{N}$. An adversarial example $x' \in \mathbb{R}^d$ is an image obtained by adding a small perturbation of at most $\epsilon > 0$ to every pixel of x such that $f(x) \neq f(x')$. With a given l_p -based adversarial region $\mathcal{R}_p(x, \epsilon) = \{x' \in \mathbb{R}^d \mid \|x' - x\|_p \leq \epsilon\}$, the aim of adversarial training (Madry et al., 2017) is typically to approximately minimize the risk on the data distribution \mathcal{D} over adversarial examples:

$$\min_{\theta} \mathbb{E}_{(x,y) \sim \mathcal{D}} \left[\max_{x' \in \mathcal{R}_p(x, \epsilon)} \mathcal{L}(\theta, f(x'), y) \right] \quad (1)$$

where \mathcal{L} is the loss function. The approximate solutions to the inner maximization problem are derived using a specific attack method to generate adversarial examples, while the outer minimization problem involves training on these generated examples.

3.1 ADVERSARIAL ATTACKS

To generate adversarial examples for training, we use the Projected Gradient Descent (PGD) attack (Madry et al., 2017). It is an iterative method that generates adversarial examples by iteratively applying small perturbations to the input. Given an input image x , the true label y , a loss function $\mathcal{L}(\theta, x, y)$, and a model parameterized by θ , the PGD attack generates an adversarial example x' through the following iterative process for a predefined number of iterations:

$$x'^0 = x \quad (2)$$

$$x'^{i+1} = \text{Proj}_{\mathcal{R}(x, \epsilon)} \left(x'^i + \eta \cdot \text{sign} \left(\nabla_x \mathcal{L}(\theta, x'^i, y) \right) \right) \quad (3)$$

where, x'^i is the adversarial example at the i -th iteration, η the step size, ϵ the maximum perturbation allowed, and $\text{Proj}_{\mathcal{R}(x, \epsilon)}$ the projection operator that ensures the adversarial example remains within the ϵ -ball centered at x . Especially, we consider the l_∞ -based adversarial region:

$$\mathcal{R}(x, \epsilon) = \{x' \in \mathbb{R}^d \mid \|x' - x\|_\infty \leq \epsilon\}.$$

3.2 MULTI-OBJECTIVE REPRESENTATION LEARNING

Training a robust model often results in a decrease in test accuracy. The goal of adversarial robustness is then to mitigate the trade-off between accuracy and robustness, thereby enhancing the model’s performance on both natural and adversarial examples (Zhang et al., 2019; Raghunathan et al., 2020). We approach this challenge as a multi-objective optimization problem. The first objective is to constrain the model to produce features that are as similar as possible for input images within the same class, and as dissimilar as possible from feature distributions of other classes, despite perturbations. The second objective is to enhance the model’s accuracy. We denote the model encoder as g (typically the model without its final layer) and the classifier as h (typically the final layer). Let $\mathcal{B} = \{x_i \in \mathbb{R}^d \mid i \in \{1, \dots, n\}\}$ be a batch of n natural images with classes $\{y_i \in \{1, \dots, c\} \mid i \in \{1, \dots, n\}\} = \mathcal{Y}$, and $\mathcal{B}' = \{x'_i \in \mathcal{R}_p(x_i, \epsilon) \mid i \in \{1, \dots, n\}\}$ its adversarial

batch. The encoder then produces features¹:

$$g(\mathcal{B}) = (z_i)_{i=1}^n, \text{ and } g(\mathcal{B}') = (z'_i)_{i=1}^n. \quad (4)$$

3.2.1 EMBEDDING SPACE WITH CLASS-ADAPTIVE MULTI-HEAD ATTENTION

During training, we consider an embedding space that includes a linear layer L_e to project the features from the encoder into a lower-dimensional space:

$$L_e((z_i)_{i=1}^n) = (s_i)_{i=1}^n, \text{ and } L_e((z'_i)_{i=1}^n) = (s'_i)_{i=1}^n. \quad (5)$$

The lower-dimensional features are then grouped according to their classes:

$$(s_i)_{i=1}^n = \bigoplus_{y \in \{1, \dots, c\}} (s_i^y)_{i=1}^{n_y}, \text{ and } (s'_i)_{i=1}^n = \bigoplus_{y \in \{1, \dots, c\}} (s'_i)^y)_{i=1}^{n_y}. \quad (6)$$

where n_y is the number of features of class y present.

Additionally, a class-adaptive multi-head attention module M_e enables interaction within each lower-dimensional feature group, resulting in richer feature representations. This module functions similarly to the multi-head attention mechanism in the vision transformer (Dosovitskiy et al., 2020; Xiong et al., 2020), where the linearly embedded image patches can be viewed as a lower-dimensional feature group. The key distinction is that our multi-head attention module operates on features from different images (instead of features from the patches of the same image), and we omit any positional embedding mechanism since the position of a feature within its lower-dimensional feature group is irrelevant in our case (otherwise, this would imply keeping track of the position of an image within its batch).

More precisely, given a lower-dimensional feature group $(s_i^y)_{i=1}^{n_y}$ (or $(s'_i)^y)_{i=1}^{n_y}$), the module M_e produces the final embedded feature group $(t_i^y)_{i=1}^{n_y}$ (or $(t'_i)^y)_{i=1}^{n_y}$) via Algorithm 1.

Algorithm 1 Class-Adaptive Multi-Head Attention

Require: A feature group $(s_i^y)_{i=1}^{n_y} = S_y \in \mathbb{R}^{n_y \times b}$, from class y .

Ensure: The availability of learnable triplet weight matrices W_j^Q, W_j^K and $W_j^V \in \mathbb{R}^{b \times b_j}$ ($b_j = b/m$) for each head $j \in \{1, \dots, m\}$ as well as an additional learnable weight matrix $W^O \in \mathbb{R}^{mb_j \times b}$.

- 1: **for** $j = 1$ to m **do**
 - 2: Normalize S_y via layer normalization.
 - 3: Project S_y through linear transformations:
 $Q_j = S_y W_j^Q, K_j = S_y W_j^K, \text{ and } V_j = S_y W_j^V.$
 - 4: Get the attention score: $A_j = \text{softmax} \left(\frac{Q_j K_j^T}{\sqrt{b_j}} \right)$
 - 5: Compute the j^{th} head output $O_j = A_j V_j.$
 - 6: **end for**
 - 7: Concatenate the outputs from the m heads and project the result through a linear transformation:
 $O = \text{concat}(O_1, \dots, O_m) W^O$
 - 8: **return** $(t_i^y)_{i=1}^{n_y} = S_y + O$
-

This approach takes advantage of the global context understanding property of the attention mechanism (Dosovitskiy et al., 2020; Han et al., 2022) to capture dependencies and relationships across features within the same group (class). **During model evaluation on the test set, the embedding space is discarded, keeping the original model architecture unchanged.**

3.2.2 MULTI-OBJECTIVE OPTIMIZATION

In multi-objective optimization, the goal is to simultaneously optimize two or more conflicting objectives, which requires balancing trade-offs to find solutions that satisfy all objectives (losses) to an

¹We use the matrix notation $(z_i)_{i=1}^n = Z \in \mathbb{R}^{n \times o}$, where Z is the concatenation of the n vectors z_i , each of dimension o . In the remainder of this paper, when we use the “ \bigoplus ” operation over these matrices, it refers to a concatenation operation.

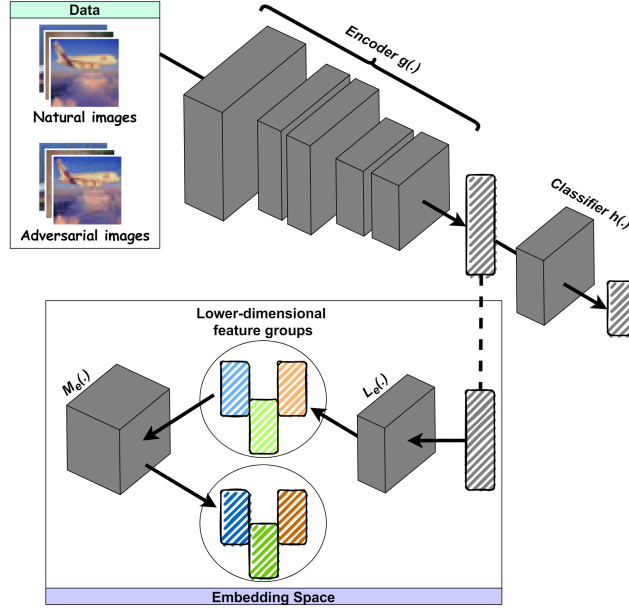


Figure 1: Overview of our proposed MOREL method. During training, encoder $g(\cdot)$ features are projected into a lower-dimensional space using a linear layer L_e . A class-adaptive multi-head attention module M_e then facilitates interaction within each of the obtained feature groups. The natural and adversarial embedded features are aligned using \mathcal{L}_{\cosine} (8), and \mathcal{L}_{csl} (9) ensures tight clustering of the class-informed embedded features. Simultaneously, the classifier $h(\cdot)$ is encouraged to make accurate predictions. During evaluation, the embedding space is discarded, preserving the original model architecture.

acceptable degree (Hotegni et al., 2024; Coello, 2007; Marler & Arora, 2004). We define the loss function for robustness based on the l_2 -normalized batch features from the embedding space:

$$\left\| \bigoplus_{y \in \{1, \dots, c\}} (t_i^y)_{i=1}^{n_y} \right\|_2 = (t_i)_{i=1}^n, \text{ and } \left\| \bigoplus_{y \in \{1, \dots, c\}} (t_i^y)_{i=1}^{n_y} \right\|_2 = (t_i')_{i=1}^n. \quad (7)$$

Cosine Similarity Loss: The cosine similarity loss function measures the cosine similarity between pairs of feature vectors, encouraging the model to produce similar features for a natural image and its adversarial example in the embedding space. It is calculated as follows, considering L_e outputs:

$$\mathcal{L}_{\cosine} = 1 - \frac{1}{n} \sum_{i=1}^n \frac{t_i \cdot t_i'}{\|t_i\| \|t_i'\|} \quad (8)$$

where \cdot denotes the dot product, and $\|\cdot\|$ is the Euclidean norm.

Multi-Positive Contrastive Loss: The multi-positive contrastive loss function (Khosla et al., 2020; Tian et al., 2024) encourages the model to bring the features of the same class closer while pushing the features of different classes apart, considering the natural features from M_e :

$$\mathcal{L}_{csl} = \sum_{j \in \{1, \dots, 2n\}} \frac{-1}{|\mathcal{P}(j)|} \sum_{p \in \mathcal{P}(j)} \log \frac{\exp(t_j \cdot t_p / \tau)}{\sum_{q \in \mathcal{Q}(j)} \exp(t_j \cdot t_q / \tau)} \quad (9)$$

where $\tau \in \mathbb{R}^+$ is a scalar parameter, $\mathcal{Q}(j) = \{1, \dots, 2n\} \setminus \{j\}$ and $\mathcal{P}(j) = \{p \in \mathcal{Q}(j) \mid y_p = y_j\}$ with y_p and y_j the class labels of t_p and t_j .

The loss function for robustness is then defined as follows:

$$\mathcal{L}_1 = \mathcal{L}_{\cosine} + \alpha \mathcal{L}_{csl} \quad (10)$$

with $0 < \alpha < 1$.

To improve accuracy, we recommend using loss functions that induce robustness in the classifier $h(\cdot)$, such as TRADES (Zhang et al., 2019) or MART (Wang et al., 2019). TRADES is defined as a Cross-Entropy loss (\mathcal{L}_{ce}) regularized by the Kullback-Leibler divergence (\mathcal{D}_{kl}) between the model’s predictions on natural and adversarial examples:

$$\mathcal{L}_2 = \mathcal{L}_{ce}(h((z_i)_{i=1}^n), \mathcal{Y}) + \frac{1}{\lambda} \cdot \mathcal{D}_{kl}(h((z_i)_{i=1}^n) \| h((z'_i)_{i=1}^n)) \quad (11)$$

with $\lambda > 0$.

Rather than the standard Cross-Entropy loss, the MART loss function uses a boosted version of Cross-Entropy (BCE) and focuses on the robustness of misclassified examples. Figure 1 shows an overview of our proposed method.

We now have 2 objective functions to be simultaneously optimized. This can be done using the Conic Scalarization (CS) method (Kasimbeyli, 2013), which is proven to produce an efficient Pareto optimal point with a choice of a reference point a , a preference vector k , and an augmentation coefficient γ :

$$\min_{\theta \in \Omega} \left(\sum_{i=1}^2 k_i (\mathcal{L}_i - a_i) + \gamma \sum_{i=1}^2 (\mathcal{L}_i - a_i) \right) \quad (\text{CS}(k, \gamma, a))$$

with $(k, \gamma) \in \{((k_1, k_2), \gamma) \mid 0 \leq \gamma < k_i, i = 1, 2\}$, and $0 \leq a_i < \mathcal{L}_i, i = 1, 2$.

Our multi-objective optimization approach then provides a comprehensive framework for enhancing the performance of deep neural networks under adversarial attacks.

4 EXPERIMENTS

To evaluate the effectiveness of our proposed method, we perform comprehensive experiments on the CIFAR-10 and CIFAR-100 datasets (Krizhevsky et al., 2009) using WideResNet34-10 (Zagoruyko, 2016).

4.1 IMPLEMENTATION DETAILS

In all experiments with MOREL, we use a batch size of 8, with parameters set to $k = (0.1, 0.9)$, $a = (0, 0)$, $\gamma = 2 \times 10^{-5}$, and $\alpha = 10^{-5}$. L_e is a single linear layer with a size of $b = 128$, and we use $m = 2$ heads in M_e . We apply the Stochastic Gradient Descent (SGD) optimizer with a momentum factor of 0.9, an initial learning rate of 0.01, which is reduced by a factor of 100 at the 75th and 90th epochs, and a weight decay of 10^{-4} . The total number of epochs is set to 100. For other methods, we use the configurations specified by their original authors (especially, $1/\lambda = 6$ for both TRADES and MART). All methods generate adversarial examples during training using PGD-10 (Madry et al., 2017), with the maximum l_∞ - norm of perturbations set to $\epsilon = 8/255$, using random start and step size $\epsilon/4$. Across the training epochs, we evaluate all models using PGD-20 and save the best-performing model as “*best*”. The models obtained at the end of training are referred to as “*last*”. Our method, using TRADES and MART as the loss function \mathcal{L}_2 , is referred to as MOREL-T and MOREL-M, respectively. All experiments are conducted on an NVIDIA A100 80GB GPU.

For testing, we use various attack methods, including FGSM (Goodfellow et al., 2014), PGD-20, PGD-100, with a step size of $\epsilon/10$, as well as CW_∞ attack (Carlini & Wagner, 2017), using the Python library Adversarial Robustness Toolbox (ART) (Nicolae et al., 2018). For the CW_∞ attack, we set the maximum number of iterations to 10, with an initial learning rate of 10^{-2} . We use a confidence level of 1 and initialize the constant c at 15. All attack methods are evaluated under the non-targeted setting, with adversarial perturbation strength constrained by the l_∞ - norm. We evaluate both the “*best*” and “*last*” models for each method and refer to the average performance across all considered attacks as “*Avg-Robust*”.

Table 1: Accuracy (in %) against **white-box** attacks on WideResNet34-10 model for CIFAR-10 and CIFAR-100 datasets. The best results are highlighted in bold and the second best in underlined.

CIFAR-10	Clean		FGSM		PGD-20		PGD-100		CW _∞		Avg-Robust	
	<i>best</i>	<i>last</i>	<i>best</i>	<i>last</i>	<i>best</i>	<i>last</i>	<i>best</i>	<i>last</i>	<i>best</i>	<i>last</i>	<i>best</i>	<i>last</i>
TRADES	84.66	85.43	60.24	60.08	55.34	52.40	54.22	50.04	44.94	<u>46.45</u>	53.69	52.24
MART	82.58	86.12	<u>61.57</u>	<u>60.83</u>	<u>57.27</u>	52.91	<u>56.36</u>	50.68	<u>47.26</u>	45.85	<u>55.61</u>	52.57
MOREL-T	85.36	<u>85.72</u>	61.05	60.50	55.49	<u>54.49</u>	54.33	<u>53.12</u>	45.17	44.62	54.01	<u>53.18</u>
MOREL-M	82.72	84.57	62.15	62.25	57.56	56.59	56.46	55.38	47.86	47.03	56.00	55.31

CIFAR-100	Clean		FGSM		PGD-20		PGD-100		CW _∞		Avg-Robust	
	<i>best</i>	<i>last</i>	<i>best</i>	<i>last</i>	<i>best</i>	<i>last</i>	<i>best</i>	<i>last</i>	<i>best</i>	<i>last</i>	<i>best</i>	<i>last</i>
TRADES	58.41	58.09	33.73	31.34	31.25	27.86	30.73	26.99	<u>23.25</u>	<u>22.21</u>	29.74	27.10
MART	56.46	58.39	<u>34.42</u>	30.21	<u>31.76</u>	25.37	<u>31.44</u>	24.44	23.14	20.50	<u>30.19</u>	25.13
MOREL-T	<u>58.74</u>	58.80	33.25	<u>32.85</u>	30.11	29.78	29.55	29.16	22.80	<u>22.21</u>	28.93	<u>28.50</u>
MOREL-M	61.61	62.25	36.73	36.06	32.81	31.96	32.08	31.10	25.72	25.38	31.83	31.13

4.2 EVALUATION AND ANALYSIS OF WHITE-BOX ROBUSTNESS

In this section, we evaluate the adversarial robustness of our proposed MOREL method under white-box attack scenarios, where the adversary has full access to the model’s parameters and gradients.

The results, presented in Table 1, show that for the CIFAR-10 dataset, MOREL-T achieves the highest clean accuracy of 85.36% among all methods, surpassing both TRADES and MART when considering the *best* models. The accuracy of its *last* model is 85.72%, placing it second after MART. Under FGSM attacks, MOREL-M shows superior performance, achieving the highest accuracy of 62.15% for its *best* model and 62.25% for its *last* model. Against stronger attacks like PGD-20 and PGD-100, MOREL-M maintains a competitive edge, particularly with an accuracy of 56.59% for its *last* model, under PGD-20, which is the highest across all evaluated models. For PGD-100, MOREL-M continues to show robustness, achieving 55.38% with its *last* model. When evaluated under CW_∞ attacks, MOREL-M again demonstrates strong performance, achieving 47.86% with its *best* model and 47.03% with its *last* model, surpassing TRADES and MART. The average robustness (*Avg-Robust*) metric across all attack types highlights the overall resilience of MOREL-M, with scores of 56.00% (*best*) and 55.31% (*last*), indicating consistent robustness across all white-box attacks.

For the CIFAR-100 dataset, MOREL-M leads in clean accuracy, achieving the highest accuracy of 61.61% among the *best* models and 62.25% among the *last* models, outperforming both TRADES and MART. This high performance in clean accuracy did not significantly compromise its robustness, as it remained dominant over other methods even under stronger attacks. The *Avg-Robust* scores of MOREL-M, 28.93% (*best*) and 28.50% (*last*), further demonstrate its consistent resilience to white-box attacks on the CIFAR-100 dataset.

The consistent performance of MOREL-M with both the *best* and *last* models underscores that MOREL’s training paradigm produces robust models throughout the training process. These results demonstrate that strong feature representation learning, as achieved by the MOREL framework, significantly enhances adversarial robustness.

4.3 EVALUATION AND ANALYSIS OF BLACK-BOX ROBUSTNESS

In addition to white-box attacks, we evaluate the robustness of our models against black-box attacks, where the adversary does not have direct access to the model’s parameters or gradients. Table 2 presents the performance of MOREL-T and MOREL-M compared to TRADES and MART on both the CIFAR-10 and CIFAR-100 datasets.

For the CIFAR-10 dataset, MOREL-T demonstrates strong robustness against all attacks, achieving an accuracy of 85.09% against the CW_∞ attack, outperforming both TRADES and MART when considering the *best* models. While MART shows superior performance for the *last* models, MOREL-T maintains consistently high robustness across both the *best* and *last* models. In the CIFAR-100 dataset, MOREL-M excels in FGSM attacks, achieving the highest accuracy of 58.82%

Table 2: Accuracy (in %) against **black-box** attacks on WideResNet34-10 model for CIFAR-10 and CIFAR-100 datasets. The best results are highlighted in bold and the second best in underlined.

CIFAR-10	FGSM		PGD-20		PGD-100		CW _∞		Avg-Robust	
	<i>best</i>	<i>last</i>	<i>best</i>	<i>last</i>	<i>best</i>	<i>last</i>	<i>best</i>	<i>last</i>	<i>best</i>	<i>last</i>
TRADES	<u>82.57</u>	83.68	<u>83.24</u>	84.24	<u>83.14</u>	84.01	<u>84.40</u>	85.13	<u>83.34</u>	84.27
MART	80.23	84.31	81.13	84.75	80.93	84.67	82.33	85.86	81.16	84.90
MOREL-T	83.25	<u>83.84</u>	83.98	<u>84.34</u>	83.90	<u>84.22</u>	85.09	<u>85.44</u>	84.06	<u>84.46</u>
MOREL-M	80.63	82.42	81.33	83.19	81.05	82.97	82.47	84.32	81.37	83.23

CIFAR-100	FGSM		PGD-20		PGD-100		CW _∞		Avg-Robust	
	<i>best</i>	<i>last</i>	<i>best</i>	<i>last</i>	<i>best</i>	<i>last</i>	<i>best</i>	<i>last</i>	<i>best</i>	<i>last</i>
TRADES	<u>56.43</u>	56.19	<u>56.53</u>	56.25	56.39	56.12	58.07	57.80	<u>56.86</u>	56.59
MART	54.28	55.73	54.49	56.10	54.32	55.89	56.21	58.02	54.83	56.44
MOREL-T	55.99	<u>56.53</u>	56.49	<u>56.87</u>	<u>56.40</u>	<u>56.66</u>	<u>58.36</u>	<u>58.38</u>	56.81	<u>57.11</u>
MOREL-M	58.82	59.63	59.30	59.92	58.98	59.54	61.22	62.02	59.58	60.28

among the *best* models and an accuracy of 59.63% among the *last* models, outperforming all other methods. Under PGD-20 and PGD-100 attacks, MOREL-M continues to demonstrate strong robustness, with *best* accuracies of 59.30% and 58.98%, respectively. In the CW_∞ attack scenario, MOREL-T also performs well, achieving 58.36% with its *best* model and 57.11% with its *last* model. For *Avg-Robust*, MOREL-M leads the performance in CIFAR-100 with scores of 56.81% (*best*) and 57.11% (*last*), indicating strong overall robustness under black-box attacks.

The results in black-box settings further reinforce the effectiveness of our multi-objective learning framework. Particularly in the challenging CIFAR-100 dataset, MOREL-T and MOREL-M consistently outperform TRADES and MART. This indicates that our method effectively generalizes across attack types.

5 CONCLUSION

In this paper, we introduced MOREL, a multi-objective feature representation learning framework aimed at enhancing the adversarial robustness of deep neural networks. MOREL encourages the alignment of natural and adversarial features through the use of cosine similarity and contrastive losses during training, promoting the learning of robust feature representations. Our approach consistently outperformed existing methods that similarly require no architectural changes or test-time data purification, such as TRADES and MART, in terms of robustness against a wide range of adversarial attacks, while maintaining high clean accuracy. Moreover, the ability of our multi-objective optimization approach to generalize across various datasets and attack types, without requiring architectural modifications, makes it a practical and scalable solution for real-world applications. For future work, we plan to investigate the transferability of robust features learned by MOREL across different tasks and domains, which could unlock new possibilities for applying adversarially robust models in areas like transfer learning and domain adaptation. Additionally, we aim to explore grouping techniques to extend MOREL’s application to scenarios with limited labeled data, such as semi-supervised or few-shot learning settings.

6 ACKNOWLEDGEMENT

This project received funding from the German Federal Ministry of Education and Research (BMBF) through the AI junior research group “Multicriteria Machine Learning”.

REFERENCES

Mariusz Bojarski, Davide Del Testa, Daniel Dworakowski, Bernhard Firner, Beat Flepp, Praseoon Goyal, Lawrence D Jackel, Mathew Monfort, Urs Muller, Jiakai Zhang, et al. End to end learning for self-driving cars. *arXiv preprint arXiv:1604.07316*, 2016.

-
- Nicholas Carlini and David Wagner. Towards evaluating the robustness of neural networks. In *2017 IEEE Symposium on Security and Privacy (SP)*, pp. 39–57. Ieee, 2017.
- Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. A simple framework for contrastive learning of visual representations. In *International conference on machine learning*, pp. 1597–1607. PMLR, 2020.
- Carlos A Coello Coello. *Evolutionary algorithms for solving multi-objective problems*. Springer, 2007.
- Gilad Cohen and Raja Giryes. Simple post-training robustness using test time augmentations and random forest. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, pp. 3996–4006, 2024.
- Gavin Weiguang Ding, Yash Sharma, Kry Yik Chau Lui, and Ruitong Huang. Mma training: Direct input space margin maximization through adversarial training. *arXiv preprint arXiv:1812.02637*, 2018.
- Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, et al. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*, 2020.
- Spyros Gidaris, Praveer Singh, and Nikos Komodakis. Unsupervised representation learning by predicting image rotations. *arXiv preprint arXiv:1803.07728*, 2018.
- Ian J Goodfellow, Jonathon Shlens, and Christian Szegedy. Explaining and harnessing adversarial examples. *arXiv preprint arXiv:1412.6572*, 2014.
- Kai Han, Yunhe Wang, Hanting Chen, Xinghao Chen, Jianyuan Guo, Zhenhua Liu, Yehui Tang, An Xiao, Chunjing Xu, Yixing Xu, et al. A survey on vision transformer. *IEEE transactions on pattern analysis and machine intelligence*, 45(1):87–110, 2022.
- Kaiming He, Haoqi Fan, Yuxin Wu, Saining Xie, and Ross Girshick. Momentum contrast for unsupervised visual representation learning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 9729–9738, 2020.
- Sedjro S Hotegni, Manuel Berkemeier, and Sebastian Peitz. Multi-objective optimization for sparse deep multi-task learning. In *2024 International Joint Conference on Neural Networks (IJCNN)*, pp. 1–9. IEEE, 2024.
- Harini Kannan, Alexey Kurakin, and Ian Goodfellow. Adversarial logit pairing. *arXiv preprint arXiv:1803.06373*, 2018.
- Retail Kasimbeyli. A conic scalarization method in multi-objective optimization. *Journal of Global Optimization*, 56:279–297, 2013.
- Prannay Khosla, Piotr Teterwak, Chen Wang, Aaron Sarna, Yonglong Tian, Phillip Isola, Aaron Maschiot, Ce Liu, and Dilip Krishnan. Supervised contrastive learning. *Advances in neural information processing systems*, 33:18661–18673, 2020.
- Alex Krizhevsky, Geoffrey Hinton, et al. Learning multiple layers of features from tiny images. 2009.
- Decheng Liu, Tao Chen, Chunlei Peng, Nannan Wang, Ruimin Hu, and Xinbo Gao. Improving adversarial robustness via decoupled visual representation masking. *arXiv preprint arXiv:2406.10933*, 2024.
- Aleksander Madry, Aleksandar Makelov, Ludwig Schmidt, Dimitris Tsipras, and Adrian Vladu. Towards deep learning models resistant to adversarial attacks. *arXiv preprint arXiv:1706.06083*, 2017.
- R Timothy Marler and Jasbir S Arora. Survey of multi-objective optimization methods for engineering. *Structural and multidisciplinary optimization*, 26:369–395, 2004.

-
- Dongyu Meng and Hao Chen. Magnet: a two-pronged defense against adversarial examples. In *Proceedings of the 2017 ACM SIGSAC conference on computer and communications security*, pp. 135–147, 2017.
- Riccardo Miotto, Fei Wang, Shuang Wang, Xiaoqian Jiang, and Joel T Dudley. Deep learning for healthcare: review, opportunities and challenges. *Briefings in bioinformatics*, 19(6):1236–1246, 2018.
- Ameer Mohammed, Ziad Ali, and Imtiaz Ahmad. Enhancing adversarial robustness with randomized interlayer processing. *Expert Systems with Applications*, 245:123085, 2024.
- Anh Nguyen, Jason Yosinski, and Jeff Clune. Deep neural networks are easily fooled: High confidence predictions for unrecognizable images. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 427–436, 2015.
- Maria-Irina Nicolae, Mathieu Sinn, Minh Ngoc Tran, Beat Buesser, Amrbrish Rawat, Martin Wis-tuba, Valentina Zantedeschi, Nathalie Baracaldo, Bryant Chen, Heiko Ludwig, et al. Adversarial robustness toolbox v1. 0.0. *arXiv preprint arXiv:1807.01069*, 2018.
- Konstantinos P Panousis, Sotirios Chatzis, and Sergios Theodoridis. Stochastic local winner-takes-all networks enable profound adversarial robustness. *arXiv preprint arXiv:2112.02671*, 2021.
- Aditi Raghunathan, Sang Michael Xie, Fanny Yang, John Duchi, and Percy Liang. Understanding and mitigating the tradeoff between robustness and accuracy. *proceedings of machine learning research*. International Conference on Machine Learning, PMLR, 2020.
- Yang Song, Taesup Kim, Sebastian Nowozin, Stefano Ermon, and Nate Kushman. Pixeldefend: Leveraging generative models to understand and defend against adversarial examples. *arXiv preprint arXiv:1710.10766*, 2017.
- Christian Szegedy, Wojciech Zaremba, Ilya Sutskever, Joan Bruna, Dumitru Erhan, Ian Goodfellow, and Rob Fergus. Intriguing properties of neural networks. *arXiv preprint arXiv:1312.6199*, 2013.
- Linyu Tang and Lei Zhang. Robust overfitting does matter: Test-time adversarial purification with fgsm. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 24347–24356, 2024.
- Yonglong Tian, Lijie Fan, Phillip Isola, Huiwen Chang, and Dilip Krishnan. Stablerep: Synthetic images from text-to-image models make strong visual representation learners. *Advances in Neural Information Processing Systems*, 36, 2024.
- Dimitris Tsipras, Shibani Santurkar, Logan Engstrom, Alexander Turner, and Aleksander Madry. Robustness may be at odds with accuracy. *arXiv preprint arXiv:1805.12152*, 2018.
- Yisen Wang, Difan Zou, Jinfeng Yi, James Bailey, Xingjun Ma, and Quanquan Gu. Improving adversarial robustness requires revisiting misclassified examples. In *International conference on learning representations*, 2019.
- Ruibin Xiong, Yunchang Yang, Di He, Kai Zheng, Shuxin Zheng, Chen Xing, Huishuai Zhang, Yanyan Lan, Liwei Wang, and Tieyan Liu. On layer normalization in the transformer architecture. In *International Conference on Machine Learning*, pp. 10524–10533. PMLR, 2020.
- Sergey Zagoruyko. Wide residual networks. *arXiv preprint arXiv:1605.07146*, 2016.
- Hongyang Zhang, Yaodong Yu, Jiantao Jiao, Eric Xing, Laurent El Ghaoui, and Michael Jordan. Theoretically principled trade-off between robustness and accuracy. In *International conference on machine learning*, pp. 7472–7482. PMLR, 2019.
- Nuoyan Zhou, Nannan Wang, Decheng Liu, Dawei Zhou, and Xinbo Gao. Enhancing robust representation in adversarial training: Alignment and exclusion criteria. *arXiv e-prints*, pp. arXiv–2310, 2023.