



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

### SPECfp®\_rate2006 = 81.2

### Acer Altos G5450 (AMD Opteron 2350)

### SPECfp\_rate\_base2006 = 73.9

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2008

Hardware Availability: Apr-2008

Software Availability: May-2008

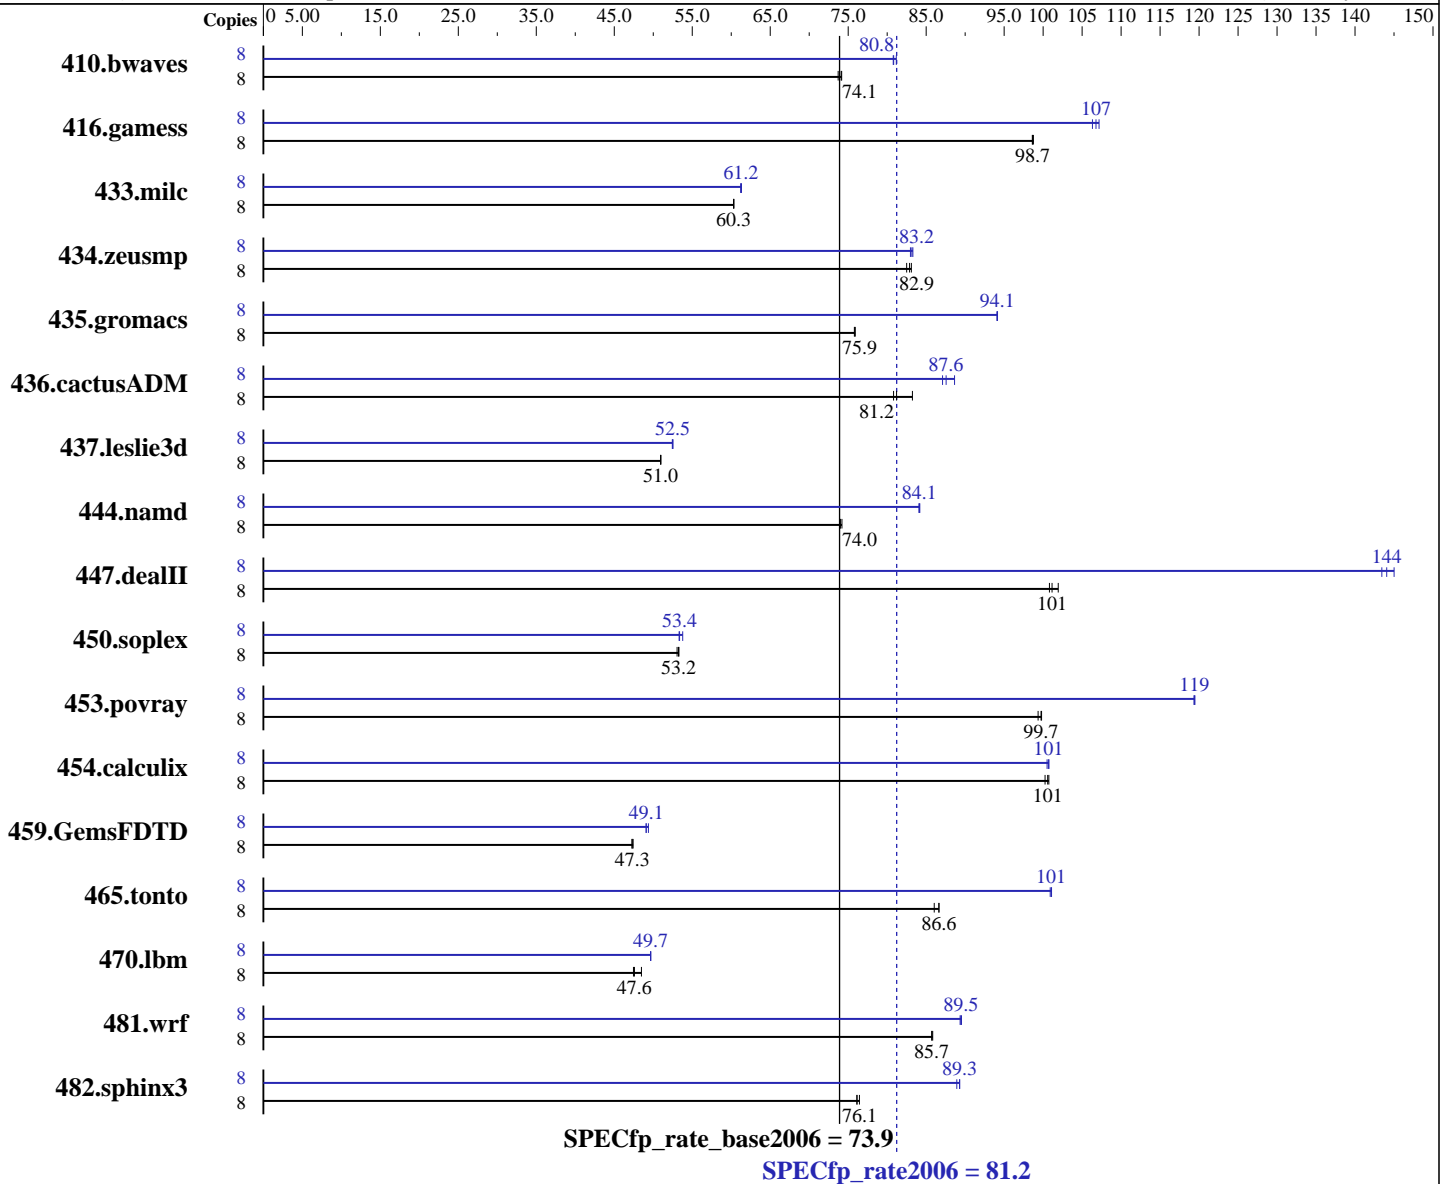

#### Hardware

CPU Name: AMD Opteron 2350  
 CPU Characteristics:  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

#### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Default  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 81.2

Acer Altos G5450 (AMD Opteron 2350)

SPECfp\_rate\_base2006 = 73.9

CPU2006 license: 97

Test date: May-2008

Test sponsor: Acer Incorporated

Hardware Availability: Apr-2008

Tested by: Acer Incorporated

Software Availability: May-2008

L3 Cache: 2 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (8x2GB, DDR2-667, CL5, Reg, Dual Rank)  
Disk Subsystem: 1x160GB SATA, 7200 RPM  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1475	73.7	<b>1467</b>	<b>74.1</b>	1466	74.2	8	1339	81.2	1346	80.8	<b>1345</b>	<b>80.8</b>
416.gamess	8	1588	98.6	1586	98.8	<b>1588</b>	<b>98.7</b>	8	<b>1467</b>	<b>107</b>	1473	106	1462	107
433.milc	8	1218	60.3	<b>1218</b>	<b>60.3</b>	1217	60.3	8	1198	61.3	<b>1199</b>	<b>61.2</b>	1200	61.2
434.zeusmp	8	876	83.1	882	82.5	<b>878</b>	<b>82.9</b>	8	877	83.0	<b>875</b>	<b>83.2</b>	874	83.3
435.gromacs	8	<b>753</b>	<b>75.9</b>	754	75.8	753	75.9	8	607	94.1	607	94.2	<b>607</b>	<b>94.1</b>
436.cactusADM	8	<b>1177</b>	<b>81.2</b>	1148	83.2	1183	80.8	8	1098	87.1	<b>1092</b>	<b>87.6</b>	1079	88.6
437.leslie3d	8	1476	51.0	<b>1476</b>	<b>51.0</b>	1476	50.9	8	<b>1432</b>	<b>52.5</b>	1432	52.5	1434	52.4
444.namd	8	<b>867</b>	<b>74.0</b>	867	74.0	865	74.2	8	763	84.1	762	84.2	<b>763</b>	<b>84.1</b>
447.dealII	8	<b>905</b>	<b>101</b>	908	101	898	102	8	<b>635</b>	<b>144</b>	638	143	631	145
450.soplex	8	1258	53.1	1252	53.3	<b>1253</b>	<b>53.2</b>	8	1251	53.3	<b>1250</b>	<b>53.4</b>	1241	53.8
453.povray	8	428	99.4	<b>427</b>	<b>99.7</b>	426	99.8	8	356	119	<b>356</b>	<b>119</b>	357	119
454.calculix	8	<b>656</b>	<b>101</b>	658	100	655	101	8	655	101	657	101	<b>656</b>	<b>101</b>
459.GemsFDTD	8	1796	47.3	1790	47.4	<b>1794</b>	<b>47.3</b>	8	1719	49.4	<b>1729</b>	<b>49.1</b>	1729	49.1
465.tonto	8	<b>909</b>	<b>86.6</b>	909	86.6	915	86.0	8	780	101	<b>779</b>	<b>101</b>	779	101
470.lbm	8	2316	47.5	2267	48.5	<b>2310</b>	<b>47.6</b>	8	2213	49.7	2213	49.7	<b>2213</b>	<b>49.7</b>
481.wrf	8	1041	85.8	1042	85.7	<b>1042</b>	<b>85.7</b>	8	998	89.5	<b>999</b>	<b>89.5</b>	1000	89.4
482.sphinx3	8	<b>2048</b>	<b>76.1</b>	2049	76.1	2040	76.4	8	<b>1746</b>	<b>89.3</b>	1753	88.9	1746	89.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2457600' was used to set environment locked pages in memory quantity
Set vm/nr_hugepages=150 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

## Base Compiler Invocation

C benchmarks:  
pgcc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 81.2

Acer Altos G5450 (AMD Opteron 2350)

SPECfp\_rate\_base2006 = 73.9

CPU2006 license: 97

Test date: May-2008

Test sponsor: Acer Incorporated

Hardware Availability: Apr-2008

Tested by: Acer Incorporated

Software Availability: May-2008

## Base Compiler Invocation (Continued)

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain  
 436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150  
-tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150  
--zc\_eh -tp barcelona-64 -Bstatic\_pgi

Fortran benchmarks:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150  
-tp barcelona-64 -Bstatic\_pgi

Benchmarks using both Fortran and C:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150  
-tp barcelona-64 -Bstatic\_pgi



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp\_rate2006 = 81.2**

**Acer Altos G5450 (AMD Opteron 2350)**

**SPECfp\_rate\_base2006 = 73.9**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** May-2008

**Hardware Availability:** Apr-2008

**Software Availability:** May-2008

## Base Other Flags

C benchmarks:

-w -Mipa=jobs:4

C++ benchmarks:

-w -Mipa=jobs:4

Fortran benchmarks:

-w -Mipa=jobs:4

Benchmarks using both Fortran and C:

-w -Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks (except as noted below):

pathcc

433.milc: pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

436.cactusADM: pathcc pathf95

481.wrf: pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 81.2

Acer Altos G5450 (AMD Opteron 2350)

SPECfp\_rate\_base2006 = 73.9

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2008

Hardware Availability: Apr-2008

Software Availability: May-2008

## Peak Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

### C benchmarks:

```

433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed
-Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr -Mipa=shape
-tp barcelona-64 -Bstatic_pgi

```

```

470.lbm: -march=barcelona -Ofast -m3dnow

```

```

482.sphinx3: -march=barcelona -Ofast

```

### C++ benchmarks:

```

444.namd: -Mphi(pass 1) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mpfo(pass 2) -fast -Mfprelaxed -Msmartalloc=huge:150
--zc_eh -Mnodepchk -Munroll=n:4 -Munroll=m:8
-tp barcelona-64 -Bstatic_pgi

```

```

447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -m32 -fno-exceptions

```

```

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -TENV:frame_pointer=off
-LNO:prefetch=1

```

```

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:load_exe=0

```

### Fortran benchmarks:

```

410.bwaves: -Mphi(pass 1) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mpfo(pass 2) -fastsse -Mfprelaxed -Msmartalloc
-Mprefetch=distance:12 -Mprefetch=nta -tp barcelona-64
-Bstatic_pgi

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp\_rate2006 = 81.2**

**Acer Altos G5450 (AMD Opteron 2350)**

**SPECfp\_rate\_base2006 = 73.9**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** May-2008

**Hardware Availability:** Apr-2008

**Software Availability:** May-2008

## Peak Optimization Flags (Continued)

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
-OPT:unroll\_size=256

434.zeusmp: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=fast  
-Mipa=inline -tp barcelona-64 -Bstatic\_pgi

437.leslie3d: -march=barcelona -Ofast -m3dnow -OPT:unroll\_size=256  
-CG:load\_exe=0 -OPT:malloc\_alg=1

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
-OPT:malloc\_alg=1

465.tonto: -march=barcelona -Ofast -OPT:malloc\_alg=1  
-OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fast -Mfpapprox=rsqrt -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic\_pgi

436.cactusADM: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -WOPT:aggstr=0

454.calculix: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=fast  
-Mipa=inline -tp barcelona-64 -Bstatic\_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -OPT:malloc\_alg=1 -m3dnow  
-LANG:copyinout=off -IPA:callee\_limit=5000

## Peak Other Flags

C benchmarks:

433.milc: -w -Mipa=jobs:4

C++ benchmarks:

444.namd: -w -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -w -Mipa=jobs:4(pass 2)

434.zeusmp: -w -Mipa=jobs:4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 81.2

Acer Altos G5450 (AMD Opteron 2350)

SPECfp\_rate\_base2006 = 73.9

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2008

Hardware Availability: Apr-2008

Software Availability: May-2008

## Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -w -Mipa=jobs:4

454.calculix: -w -Mipa=jobs:4

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.01.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 17:46:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 25 June 2008.