



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint®_rate2006 = 86.8

ASUS Q170M-C motherboard (Intel Pentium G4500T)

SPECint_rate_base2006 = 82.5

CPU2006 license: 13


Test date: Apr-2016

Test sponsor: Intel Corporation

Hardware Availability: Sep-2015

Tested by: Intel Corporation

Software Availability: Aug-2015

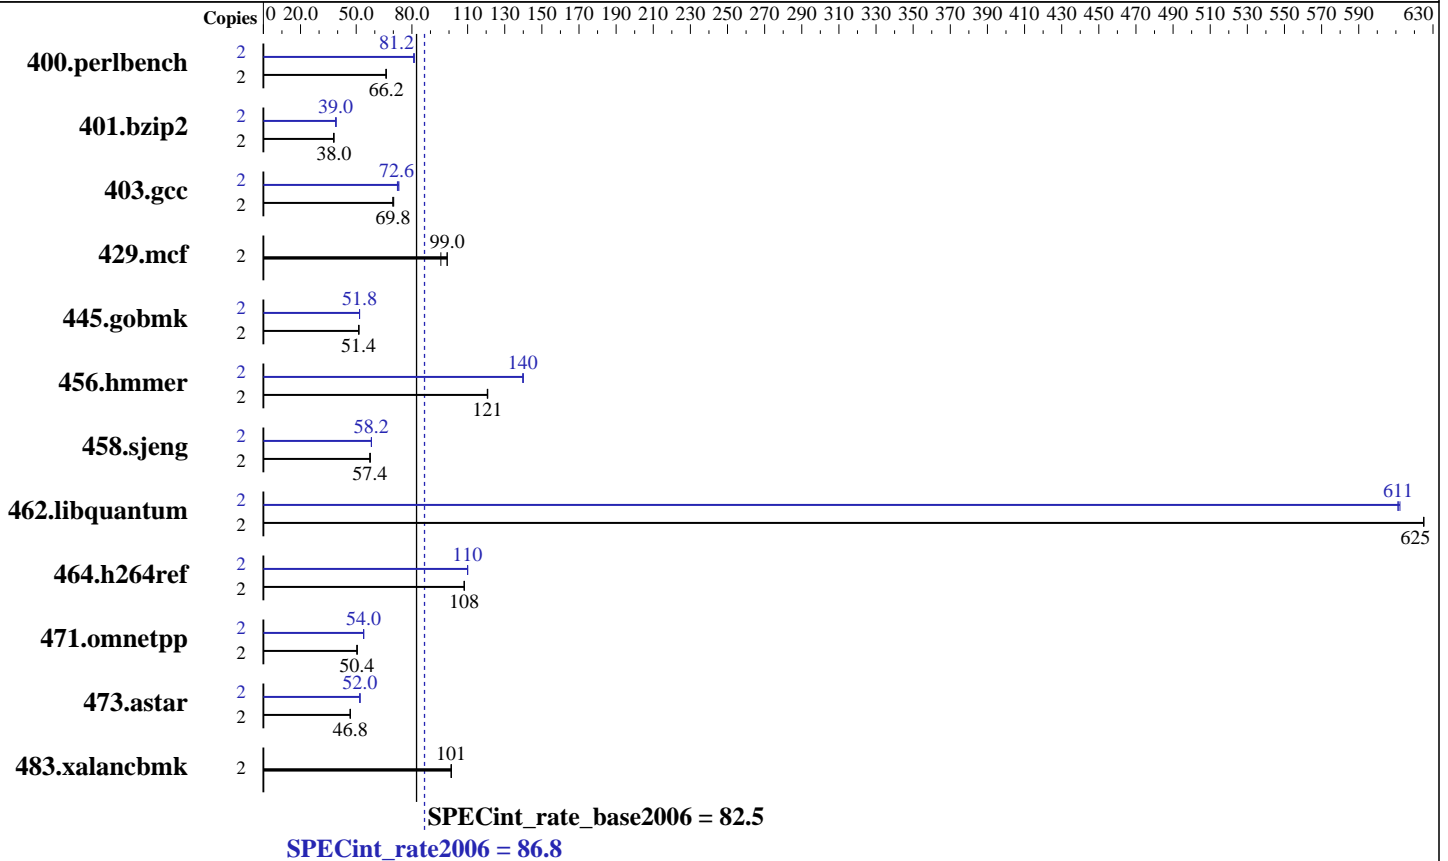

Hardware

CPU Name: Intel Pentium G4500T
 CPU Characteristics:
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx4 PC4-2133P-U)
 Disk Subsystem: 1 TB Seagate Barracuda HDD, 7200 RPM
 Other Hardware: None

Software

Operating System: Microsoft Windows 7 Professional 6.1.7601 Service Pack 1 Build 7601
 Compiler: C/C++: Version 16.0.0.110 of Intel C++ Studio XE for Windows;
 Libraries: Version 18.00.30723 of Microsoft Visual Studio 2013
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 11.0 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 86.8

ASUS Q170M-C motherboard (Intel Pentium G4500T)

SPECint_rate_base2006 = 82.5

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2016
Hardware Availability: Sep-2015
Software Availability: Aug-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	296	66.0	<u>295</u>	<u>66.2</u>	295	66.2	2	241	81.0	<u>241</u>	<u>81.2</u>	240	81.2
401.bzip2	2	507	38.0	<u>508</u>	<u>38.0</u>	510	37.8	2	496	39.0	493	39.2	<u>494</u>	<u>39.0</u>
403.gcc	2	231	69.8	230	70.2	<u>231</u>	<u>69.8</u>	2	223	72.2	<u>222</u>	<u>72.6</u>	221	73.0
429.mcf	2	191	95.6	184	99.0	<u>184</u>	<u>99.0</u>	2	191	95.6	184	99.0	<u>184</u>	<u>99.0</u>
445.gobmk	2	408	51.4	409	51.4	<u>408</u>	<u>51.4</u>	2	405	51.8	<u>405</u>	<u>51.8</u>	405	51.8
456.hammer	2	155	121	155	121	<u>155</u>	<u>121</u>	2	<u>133</u>	<u>140</u>	133	140	133	140
458.sjeng	2	421	57.6	<u>421</u>	<u>57.4</u>	422	57.4	2	416	58.2	416	58.2	<u>416</u>	<u>58.2</u>
462.libquantum	2	66.3	625	<u>66.3</u>	<u>625</u>	66.3	625	2	<u>67.8</u>	<u>611</u>	67.7	612	67.8	611
464.h264ref	2	<u>409</u>	<u>108</u>	409	108	409	108	2	403	110	402	110	<u>402</u>	<u>110</u>
471.omnetpp	2	<u>248</u>	<u>50.4</u>	248	50.6	248	50.4	2	232	54.0	<u>232</u>	<u>54.0</u>	232	54.0
473.astar	2	300	46.8	<u>300</u>	<u>46.8</u>	300	46.8	2	<u>270</u>	<u>52.0</u>	270	52.0	270	52.0
483.xalancbmk	2	<u>136</u>	<u>101</u>	136	101	136	101	2	<u>136</u>	<u>101</u>	136	101	136	101

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 16.0 was set up to generate 32-bit binaries with the command:
"ipsxe-comp-vars.bat ia32 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2016 program folder)

Platform Notes

Sysinfo program C:\SPEC16.0\Docs\sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on CltF832E4885A95 Mon Apr 25 23:49:26 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
Trying 'systeminfo'
OS Name       : Microsoft Windows 7 Professional
OS Version    : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: System manufacturer
System Model   : System Product Name
Processor(s)  : 1 Processor(s) Installed.
               [01]: Intel64 Family 6 Model 94 Stepping 3 GenuineIntel ~3001 Mhz
BIOS Version  : American Megatrends Inc. 0704, 1/12/2016
Total Physical Memory: 8,070 MB
```

```
Trying 'wmic cpu get /value'
DeviceID      : CPU0
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 86.8

ASUS Q170M-C motherboard (Intel Pentium G4500T)

SPECint_rate_base2006 = 82.5

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2016
Hardware Availability: Sep-2015
Software Availability: Aug-2015

Platform Notes (Continued)

L2CacheSize : 512
L3CacheSize : 3072
MaxClockSpeed : 3001
Name : Intel(R) Pentium(R) CPU G4500T @ 3.00GHz
NumberOfCores : 2
NumberOfLogicalProcessors: 2

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

Binaries compiled on a system with 1x Intel Xeon E5-2699 v3 CPU
+ 64GB memory using Windows 8.1 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:
icl -Qvc12 -Qstd=c99

C++ benchmarks:
icl -Qvc12

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DWIN32
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Base Optimization Flags

C benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F256000000

C++ benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F256000000 shlw32M.lib -link /FORCE:MULTIPLE



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 86.8

ASUS Q170M-C motherboard (Intel Pentium G4500T)

SPECint_rate_base2006 = 82.5

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2016
Hardware Availability: Sep-2015
Software Availability: Aug-2015

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icl -Qvc12 -Qstd=c99

456.hmmr: C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041ompilers_and_libraries_2016\windows/bin/intel64/icl.exe

458.sjeng: C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041ompilers_and_libraries_2016\windows/bin/intel64/icl.exe

462.libquantum: C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041ompilers_and_libraries_2016\windows/bin/intel64/icl.exe
-Qstd=c99

C++ benchmarks (except as noted below):

icl -Qvc12

473.astar: C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041ompilers_and_libraries_2016\windows/bin/intel64/icl.exe

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
456.hmmr: -DSPEC_CPU_P64
458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
464.h264ref: -DWIN32
473.astar: -DSPEC_CPU_P64
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F256000000 shlw32M.lib -link /FORCE:MULTIPLE

401.bzp2: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
/F256000000

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 86.8

ASUS Q170M-C motherboard (Intel Pentium G4500T)

SPECint_rate_base2006 = 82.5

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2016
Hardware Availability: Sep-2015
Software Availability: Aug-2015

Peak Optimization Flags (Continued)

403.gcc: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F256000000

429.mcf: basepeak = yes

445.gobmk: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias /F256000000

456.hmmer: -Qauto-ilp32 -QxSSE4.2(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo(1) -O3(1) -Qprec-div-(1)
-Qopt-prefetch(1) /F256000000

458.sjeng: -Qauto-ilp32 -QxSSE4.2(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo(1) -O3(1) -Qprec-div-(1)
-Qunroll4(1) /F256000000

462.libquantum: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F256000000

464.h264ref: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F256000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F256000000 shlW32M.lib
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F256000000 shlW64M.lib

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

```
456hmmer -link -LIBPATH:C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041\compilers_and_libraries_2016\windows\compiler\lib\intel64 -link -LIBPATH:C:\Program Files (x86)\Microsoft SDKs\Windows7.1A\lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 12.0/VC/lib/AMD64
458sjeng -link -LIBPATH:C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041\compilers_and_libraries_2016\windows\compiler\lib\intel64 -link -LIBPATH:C:\Program Files (x86)\Microsoft SDKs\Windows7.1A\lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 12.0/VC/lib/AMD64
462libquantum -link -LIBPATH:C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041\compilers_and_libraries_2016\windows\compiler\lib\intel64 -link -LIBPATH:C:\Program Files (x86)\Microsoft SDKs\Windows7.1A\lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 12.0/VC/lib/AMD64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 86.8

ASUS Q170M-C motherboard (Intel Pentium G4500T)

SPECint_rate_base2006 = 82.5

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Apr-2016
Hardware Availability: Sep-2015
Software Availability: Aug-2015

Peak Other Flags (Continued)

C++ benchmarks:

```
473.exe -link /FORCE:MULTIPLE -link -LIBPATH:C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.04\compiler_and_libraries_2016\windows\compiler\lib\intel64 -link -LIBPATH:C:\Program Files (x86)\Microsoft SDKs\Windows7\IA64
```

```
-link -LIBPATH:C:\Program Files (x86)\Microsoft Visual Studio 12.0\VC\lib\AMD64
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 13 11:41:49 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 July 2016.