



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 251

Huawei 2288H V5 (Intel Xeon Platinum 8180)

SPECrate2017_fp_peak = 256

CPU2017 License: 3175


Test Sponsor: Huawei

Tested by: Huawei

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

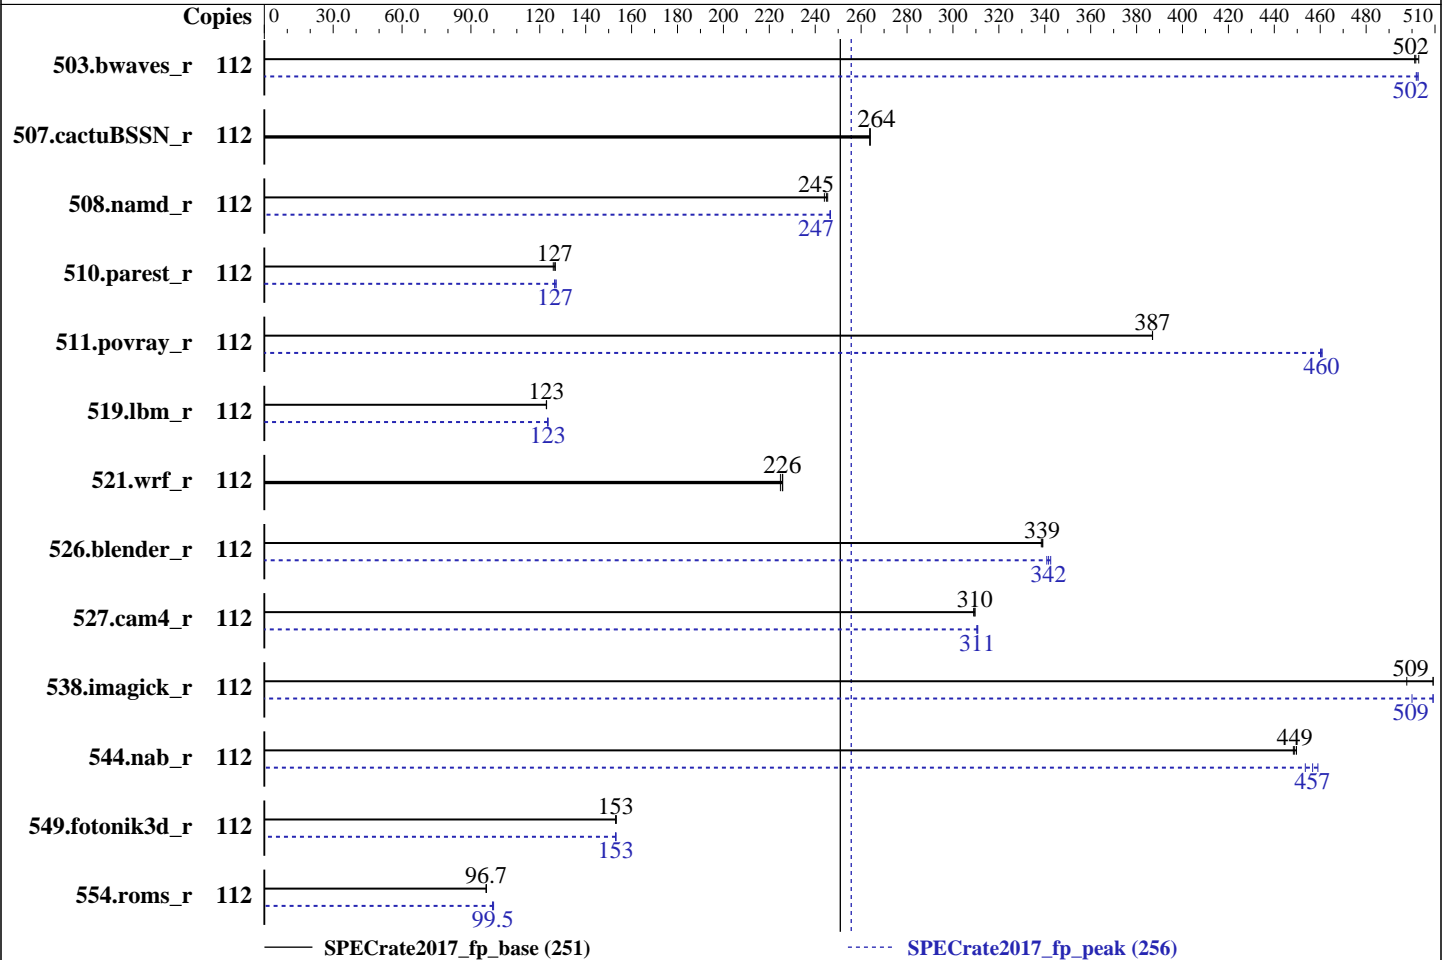

Hardware

CPU Name: Intel Xeon Platinum 8180
 Max MHz.: 3800
 Nominal: 2500
 Enabled: 56 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 1 x 1200 GB SAS, 10000 RPM
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2(x86_64) 4.4.21-69-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 0.25 Released Aug-2017
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 251

Huawei 2288H V5 (Intel Xeon Platinum 8180)

SPECrate2017_fp_peak = 256

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	2241	501	<u>2239</u>	<u>502</u>	2233	503	112	2238	502	2234	503	<u>2237</u>	<u>502</u>
507.cactuBSSN_r	112	538	264	<u>537</u>	<u>264</u>	537	264	112	538	264	<u>537</u>	<u>264</u>	537	264
508.namd_r	112	434	245	436	244	<u>435</u>	<u>245</u>	112	<u>432</u>	<u>247</u>	431	247	432	246
510.parest_r	112	2311	127	2327	126	<u>2315</u>	<u>127</u>	112	<u>2313</u>	<u>127</u>	2304	127	2317	126
511.povray_r	112	<u>676</u>	<u>387</u>	676	387	676	387	112	568	460	567	461	<u>568</u>	<u>460</u>
519.lbm_r	112	961	123	960	123	<u>960</u>	<u>123</u>	112	955	124	956	123	<u>956</u>	<u>123</u>
521.wrf_r	112	1116	225	<u>1112</u>	<u>226</u>	1111	226	112	1116	225	<u>1112</u>	<u>226</u>	1111	226
526.blender_r	112	503	339	504	338	<u>503</u>	<u>339</u>	112	500	341	<u>499</u>	<u>342</u>	498	343
527.cam4_r	112	<u>633</u>	<u>310</u>	634	309	633	310	112	<u>631</u>	<u>311</u>	630	311	631	310
538.imagick_r	112	560	498	547	509	<u>547</u>	<u>509</u>	112	557	500	<u>547</u>	<u>509</u>	547	509
544.nab_r	112	<u>420</u>	<u>449</u>	419	450	420	448	112	411	459	<u>413</u>	<u>457</u>	416	454
549.fotonik3d_r	112	2847	153	2852	153	<u>2850</u>	<u>153</u>	112	2849	153	<u>2851</u>	<u>153</u>	2852	153
554.roms_r	112	<u>1840</u>	<u>96.7</u>	1842	96.6	1840	96.7	112	1782	99.9	<u>1788</u>	<u>99.5</u>	1789	99.5

SPECrate2017_fp_base = 251

SPECrate2017_fp_peak = 256

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/cpu2017/lib/ia32:/cpu2017/lib/intel64:/cpu2017/je5.0.1-32:/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 251

Huawei 2288H V5 (Intel Xeon Platinum 8180)

SPECrate2017_fp_peak = 256

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Platform Notes

BIOS configuration:
 Power Policy Set to Performance
 SNC Set to Enabled
 IMC Interleaving Set to 1 way Interleave
 XPT Prefetch Set to Enabled
 Sysinfo program /cpu2017/bin/sysinfo
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
 running on linux-408j Wed Oct 25 00:26:25 2017

SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
 2 "physical id"s (chips)
 112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 28
  siblings     : 56
 physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
 28 29 30
 physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
 28 29 30
```

```
From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                112
On-line CPU(s) list:   0-111
Thread(s) per core:    2
Core(s) per socket:    28
Socket(s):             2
NUMA node(s):         4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
Stepping:              4
CPU MHz:               2500.113
BogoMIPS:              5000.22
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 251

Huawei 2288H V5 (Intel Xeon Platinum 8180)

SPECrate2017_fp_peak = 256

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Platform Notes (Continued)

```

L3 cache:                39424K
NUMA node0 CPU(s):      0-3,7-9,14-17,21-23,56-59,63-65,70-73,77-79
NUMA node1 CPU(s):      4-6,10-13,18-20,24-27,60-62,66-69,74-76,80-83
NUMA node2 CPU(s):      28-31,35-37,42-45,49-51,84-87,91-93,98-101,105-107
NUMA node3 CPU(s):      32-34,38-41,46-48,52-55,88-90,94-97,102-104,108-111
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdc_m pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 39424 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 56 57 58 59 63 64 65 70 71 72 73 77 78
79
node 0 size: 94737 MB
node 0 free: 93721 MB
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 60 61 62 66 67 68 69 74 75 76 80 81
82 83
node 1 size: 96760 MB
node 1 free: 95806 MB
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 84 85 86 87 91 92 93 98 99 100
101 105 106 107
node 2 size: 96760 MB
node 2 free: 95762 MB
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 88 89 90 94 95 96 97 102 103 104
108 109 110 111
node 3 size: 96626 MB
node 3 free: 95717 MB
node distances:
node  0  1  2  3
 0:  10  11  21  21
 1:  11  10  21  21
 2:  21  21  10  11
 3:  21  21  11  10

```

```

From /proc/meminfo
MemTotal:      394121544 kB
HugePages_Total:      0

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 251

Huawei 2288H V5 (Intel Xeon Platinum 8180)

SPECrate2017_fp_peak = 256

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Platform Notes (Continued)

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 2

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP2"

VERSION_ID="12.2"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

Linux linux-408j 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 23 20:03

SPEC is set to: /cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xf	269G	40G	230G	15%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.25 08/12/2017

Memory:

24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 251

Huawei 2288H V5 (Intel Xeon Platinum 8180)

SPECrate2017_fp_peak = 256

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Compiler Version Notes (Continued)

=====
CC 519.lbm_r(peak) 544.nab_r(peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(base) 510.parest_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(peak) 510.parest_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(peak) 526.blender_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 251

Huawei 2288H V5 (Intel Xeon Platinum 8180)

SPECrate2017_fp_peak = 256

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Compiler Version Notes (Continued)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 554.roms_r(peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(base) 527.cam4_r(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(peak) 527.cam4_r(peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 251

Huawei 2288H V5 (Intel Xeon Platinum 8180)

SPECrate2017_fp_peak = 256

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 251

Huawei 2288H V5 (Intel Xeon Platinum 8180)

SPECrate2017_fp_peak = 256

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Base Optimization Flags (Continued)

C++ benchmarks (continued):

`-qopt-mem-layout-trans=3`

Fortran benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both Fortran and C:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both C and C++:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3`

Benchmarks using Fortran, C, and C++:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Base Other Flags

C benchmarks:

`-m64 -std=c11`

C++ benchmarks:

`-m64`

Fortran benchmarks:

`-m64`

Benchmarks using both Fortran and C:

`-m64 -std=c11`

Benchmarks using both C and C++:

`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:

`-m64 -std=c11`



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 251

Huawei 2288H V5 (Intel Xeon Platinum 8180)

SPECrate2017_fp_peak = 256

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 519.lbm_r

C++ benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 251

Huawei 2288H V5 (Intel Xeon Platinum 8180)

SPECrate2017_fp_peak = 256

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_fp_base = 251

Huawei 2288H V5 (Intel Xeon Platinum 8180)

SPECrate2017_fp_peak = 256

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Peak Other Flags (Continued)

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-10-24 12:26:24-0400.

Report generated on 2018-10-31 13:00:24 by CPU2017 PDF formatter v6067.

Originally published on 2017-11-14.