



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.40 GHz, Intel Xeon Gold 5115)

SPECspeed2017_fp_base = 46.2

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

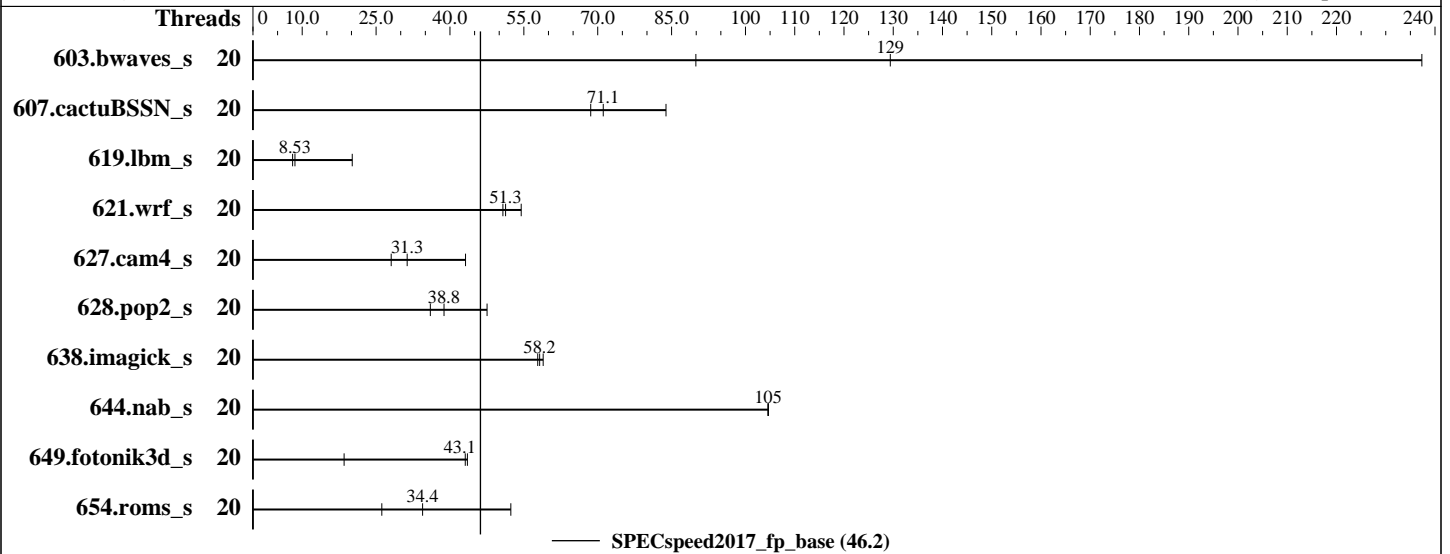

Hardware

CPU Name: Intel Xeon Gold 5115
 Max MHz.: 3200
 Nominal: 2400
 Enabled: 20 cores, 2 chips
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 13.75 MB I+D on chip per chip
 Other: None
 Memory: 256 GB (16 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)
 Storage: 1 x 480 GB SATA SSD, RAID 0
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 Kernel 3.10.0-693.e17.x86_64
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: HPE BIOS Version I41 released Oct-2017 (tested with I41 9/29/2017)
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.40 GHz, Intel Xeon Gold 5115)

SPECspeed2017_fp_base = 46.2

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	20	249	237	456	129	656	89.9							
607.cactuBSSN_s	20	199	83.9	234	71.1	243	68.6							
619.lbm_s	20	260	20.2	614	8.53	651	8.05							
621.wrf_s	20	243	54.5	261	50.7	258	51.3							
627.cam4_s	20	205	43.2	283	31.3	316	28.1							
628.pop2_s	20	250	47.5	306	38.8	330	36.0							
638.imagick_s	20	249	57.8	248	58.2	245	58.9							
644.nab_s	20	167	105	167	105	167	105							
649.fotonik3d_s	20	209	43.5	493	18.5	211	43.1							
654.roms_s	20	457	34.4	602	26.2	301	52.4							

SPECspeed2017_fp_base = 46.2

SPECspeed2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
irqbalance disabled with "systemctl stop irqbalance"
tuned profile set with "tuned-adm profile throughput-performance"

General Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/root/cpu2017/lib/ia32:/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-32:/root/cpu2017/je5.0.1-64"
OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4

Platform Notes

BIOS Configuration:
Intel Hyperthreading set to Disabled
Thermal Configuration set to Maximum Cooling
LLC Prefetch set to Enabled
LLC Dead Line Allocation set to Disabled
Memory Patrol Scrubbing set to Disabled
Workload Profile set to General Peak Frequency Compute
Energy/Performance Bias set to Maximum Performance

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.40 GHz, Intel Xeon Gold 5115)

SPECspeed2017_fp_base = 46.2

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Platform Notes (Continued)

Workload Profile set to Custom

NUMA Group Size Optimization set to Flat

Sysinfo program /root/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on localhost.localdomain Tue Nov 21 12:41:22 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5115 CPU @ 2.40GHz

2 "physical id"s (chips)

20 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 10

siblings : 10

physical 0: cores 0 1 2 3 4 8 9 10 11 12

physical 1: cores 0 1 2 3 4 8 9 10 11 12

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 20

On-line CPU(s) list: 0-19

Thread(s) per core: 1

Core(s) per socket: 10

Socket(s): 2

NUMA node(s): 2

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Gold 5115 CPU @ 2.40GHz

Stepping: 4

CPU MHz: 2400.000

BogoMIPS: 4805.38

Virtualization: VT-x

L1d cache: 32K

L1i cache: 32K

L2 cache: 1024K

L3 cache: 14080K

NUMA node0 CPU(s): 0-9

NUMA node1 CPU(s): 10-19

/proc/cpuinfo cache data

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.40 GHz, Intel Xeon Gold 5115)

SPECspeed2017_fp_base = 46.2

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Platform Notes (Continued)

cache size : 14080 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9

node 0 size: 130732 MB

node 0 free: 125970 MB

node 1 cpus: 10 11 12 13 14 15 16 17 18 19

node 1 size: 131071 MB

node 1 free: 125565 MB

node distances:

node 0 1

0: 10 21

1: 21 10

From /proc/meminfo

MemTotal: 263630492 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.3 (Maipo)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="7.3"

PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"

ANSI_COLOR="0;31"

CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

uname -a:

Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016

x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 21 09:37

SPEC is set to: /root/cpu2017

Filesystem Type Size Used Avail Use% Mounted on

/dev/sda4 xfs 442G 20G 423G 5% /

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.40 GHz, Intel Xeon Gold 5115)

SPECspeed2017_fp_base = 46.2

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Platform Notes (Continued)

hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I41 09/29/2017

Memory:

16x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 607.cactuBSSN_s(base)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.40 GHz, Intel Xeon Gold 5115)

SPECspeed2017_fp_base = 46.2

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG

628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

-assume byterecl

638.imagick_s: -DSPEC_LP64

644.nab_s: -DSPEC_LP64

649.fotonik3d_s: -DSPEC_LP64

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP

Fortran benchmarks:

-DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp

-nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP

-nostandard-realloc-lhs -align array32byte

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.40 GHz, Intel Xeon Gold 5115)

SPECspeed2017_fp_base = 46.2

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -align array32byte
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revG.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-11-21 13:41:21-0500.

Report generated on 2018-10-31 14:56:04 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-12.