



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 141

PowerEdge R740xd (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55


Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

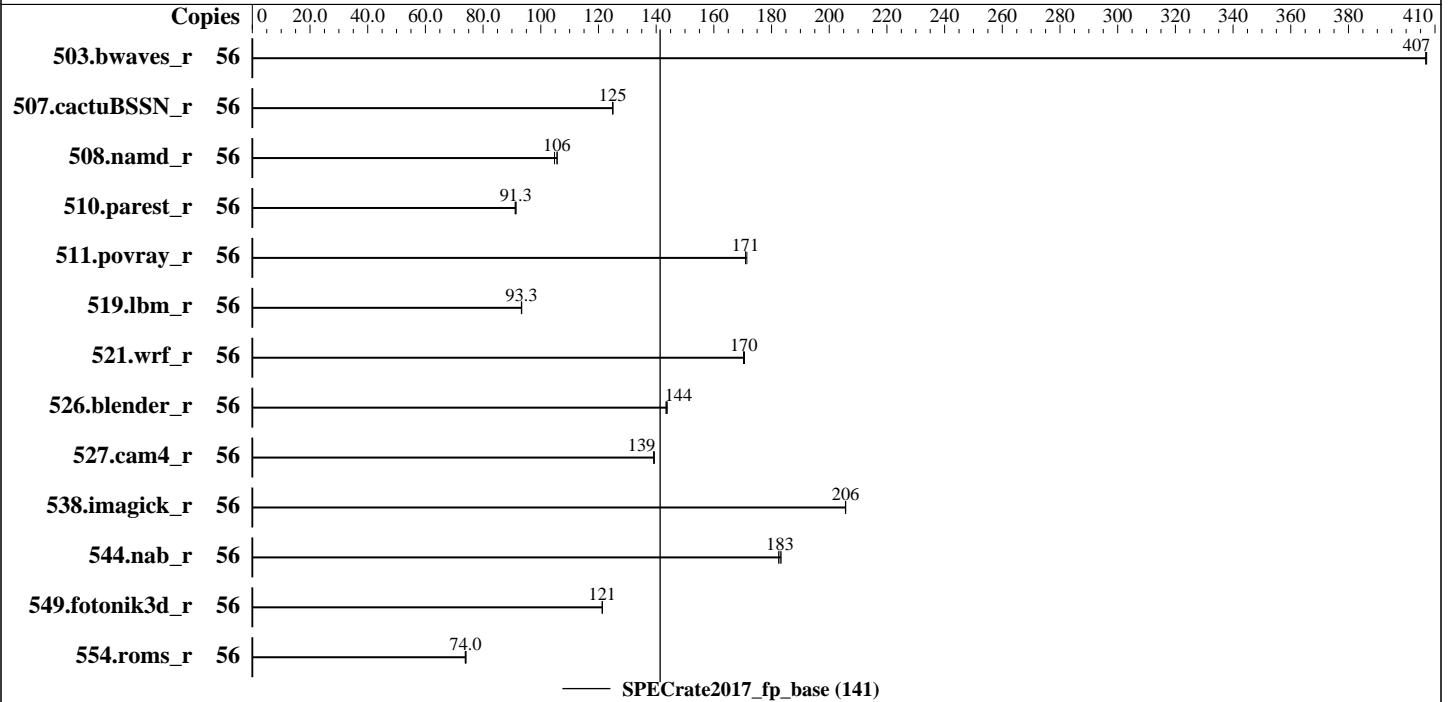

Hardware

CPU Name: Intel Xeon Gold 5120
 Max MHz.: 3200
 Nominal: 2200
 Enabled: 28 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 19.25 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)
 Storage: 460 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: version 1.1.7 released Oct-2017
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 141

PowerEdge R740xd (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	56	1379	407	<u>1380</u>	<u>407</u>	1380	407							
507.cactuBSSN_r	56	<u>567</u>	<u>125</u>	567	125	568	125							
508.namd_r	56	503	106	<u>504</u>	<u>106</u>	508	105							
510.parest_r	56	1603	91.4	1608	91.1	<u>1604</u>	<u>91.3</u>							
511.povray_r	56	<u>765</u>	<u>171</u>	765	171	763	171							
519.lbm_r	56	<u>632</u>	<u>93.3</u>	633	93.3	632	93.4							
521.wrf_r	56	<u>736</u>	<u>170</u>	735	171	737	170							
526.blender_r	56	593	144	595	143	<u>594</u>	<u>144</u>							
527.cam4_r	56	<u>703</u>	<u>139</u>	703	139	704	139							
538.imagick_r	56	<u>677</u>	<u>206</u>	677	206	677	206							
544.nab_r	56	<u>515</u>	<u>183</u>	517	182	514	183							
549.fotonik3d_r	56	1798	121	<u>1798</u>	<u>121</u>	1799	121							
554.roms_r	56	1206	73.8	1201	74.1	<u>1203</u>	<u>74.0</u>							

SPECrate2017_fp_base = 141

SPECrate2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 141

PowerEdge R740xd (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Platform Notes

BIOS settings:

```

Sub NUMA Cluster enabled
Virtualization Technology disabled
System Profile set to Custom
CPU Performance set to Maximum Performance
C States set to Autonomous
C1E disabled
Uncore Frequency set to Dynamic
Energy Efficiency Policy set to Performance
Memory Patrol Scrub disabled
Logical Processor enabled
CPU Interconnect Bus Link Power Management disabled
PCI ASPM L1 Link Power Management disabled
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-wwko Tue Nov 14 17:23:33 2017

```

SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz
 2 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 14
siblings : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                56
On-line CPU(s) list:   0-55
Thread(s) per core:    2
Core(s) per socket:    14
Socket(s):             2
NUMA node(s):         4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                85
Model name:            Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz
Stepping:              4

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 141

PowerEdge R740xd (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Platform Notes (Continued)

```

CPU MHz:                2194.944
BogoMIPS:               4389.88
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              19712K
NUMA node0 CPU(s):    0,4,8,12,16,20,24,28,32,36,40,44,48,52
NUMA node1 CPU(s):    1,5,9,13,17,21,25,29,33,37,41,45,49,53
NUMA node2 CPU(s):    2,6,10,14,18,22,26,30,34,38,42,46,50,54
NUMA node3 CPU(s):    3,7,11,15,19,23,27,31,35,39,43,47,51,55
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 19712 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52
node 0 size: 95355 MB
node 0 free: 94914 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53
node 1 size: 96753 MB
node 1 free: 96401 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54
node 2 size: 96753 MB
node 2 free: 96399 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55
node 3 size: 96750 MB
node 3 free: 96383 MB
node distances:
node  0  1  2  3
 0:  10  21  11  21
 1:  21  10  21  11
 2:  11  21  10  21
 3:  21  11  21  10

```

From /proc/meminfo

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 141

PowerEdge R740xd (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Platform Notes (Continued)

MemTotal: 394867840 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
```

```
SuSE-release:
```

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
```

```
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

```
os-release:
```

```
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
```

```
Linux linux-wwko 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 14 11:50
```

```
SPEC is set to: /home/cpu2017
```

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   892G  22G  871G   3% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Dell Inc. 1.1.7 08/10/2017
```

```
Memory:
```

```
24x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666, configured at 2400
```

(End of data from sysinfo program)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 141

PowerEdge R740xd (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2017
Hardware Availability: Oct-2017
Software Availability: Sep-2017

Compiler Version Notes

=====
CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(base) 510.parest_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(base) 527.cam4_r(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 141

PowerEdge R740xd (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 141

PowerEdge R740xd (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_fp_base = 141

PowerEdge R740xd (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-11-14 18:23:32-0500.

Report generated on 2018-10-31 13:39:15 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-26.