



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.00 GHz, AMD EPYC 7401)

SPECrate2017\_int\_base = 222

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

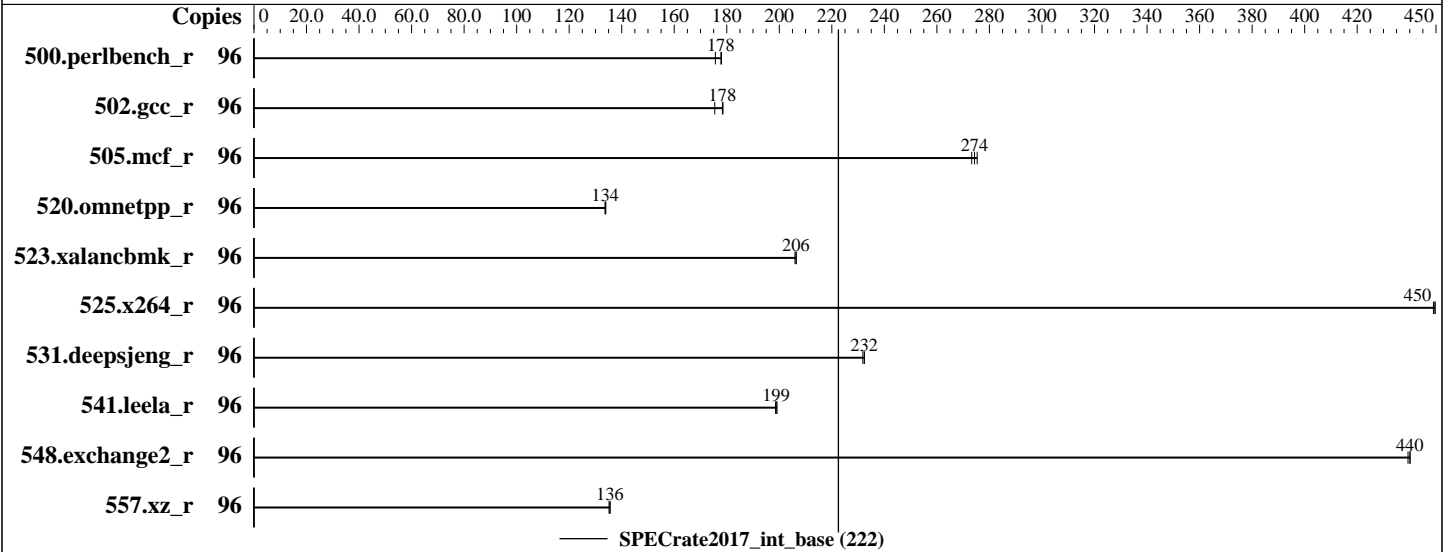

## Hardware

CPU Name: AMD EPYC 7401  
 Max MHz.: 3000  
 Nominal: 2000  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip(s)  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 8 MB shared / 3 cores  
 Other: None  
 Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2666V-L)  
 Storage: 1 x 400 GB SAS SSD, RAID 0  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 12 (x86\_64) SP3  
 Kernel 4.4.73-5-default  
 Compiler: C/C++: Version 1.0.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: No  
 Firmware: HPE BIOS Version A40 released Nov-2017 (tested with A40 (11/10/2017))  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc general purpose malloc implementation v4.5.0



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.00 GHz, AMD EPYC 7401)

SPECrate2017\_int\_base = 222

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Nov-2017  
Hardware Availability: Nov-2017  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	859	178	870	176	<b>860</b>	<b>178</b>							
502.gcc_r	96	775	175	761	179	<b>762</b>	<b>178</b>							
505.mcf_r	96	568	273	<b>566</b>	<b>274</b>	563	275							
520.omnetpp_r	96	<b>942</b>	<b>134</b>	942	134	940	134							
523.xalancbmk_r	96	<b>491</b>	<b>206</b>	492	206	491	206							
525.x264_r	96	<b>374</b>	<b>450</b>	374	449	374	450							
531.deepsjeng_r	96	<b>473</b>	<b>232</b>	473	232	475	232							
541.leela_r	96	798	199	<b>800</b>	<b>199</b>	801	199							
548.exchange2_r	96	572	439	<b>572</b>	<b>440</b>	571	440							
557.xz_r	96	765	136	<b>765</b>	<b>136</b>	767	135							

SPECrate2017\_int\_base = 222

SPECrate2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu  
Linux governor set to performance with cpupower "cpupower frequency-set -r -g performance"  
dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen10**

(2.00 GHz, AMD EPYC 7401)

SPECrate2017\_int\_base = 222

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2017

**Hardware Availability:** Nov-2017

**Software Availability:** Sep-2017

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/amd1704-rate-libs-revC/64;/home/cpu2017/amd1704-rate-libs-revC/32:"
MALLOCONF = "lg_chunk:26"
```

The AMD64 AOCC Compiler Suite is available at

<http://developer.amd.com/tools-and-sdks/cpu-development/amd-optimizing-cc-compiler/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at

<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>

jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc uses environment variable MALLOCONF with values narenas and lg\_chunk:

narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.

lg\_chunk: set the virtual memory chunk size (log base 2). For example,

lg\_chunk:21 sets the default chunk size to 2<sup>21</sup> = 2MiB.

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran. It is available here:

<http://developer.amd.com/amd-aocc/>

## Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

Workload Profile set to General Throughput Compute

Minimum Processor Idle Power Core C-State set to C6 State

Processor Power and Utilization Monitoring set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on dl385g10-2 Mon Dec 4 00:03:33 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7401 24-Core Processor

2 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.00 GHz, AMD EPYC 7401)

SPECrate2017\_int\_base = 222

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2017  
**Hardware Availability:** Nov-2017  
**Software Availability:** Sep-2017

## Platform Notes (Continued)

excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 24
siblings  : 48
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:   0-95
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):             2
NUMA node(s):          8
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 1
Model name:            AMD EPYC 7401 24-Core Processor
Stepping:              2
CPU MHz:               2000.000
CPU max MHz:           2000.0000
CPU min MHz:           1200.0000
BogoMIPS:              3992.30
Virtualization:        AMD-V
L1d cache:             32K
L1i cache:             64K
L2 cache:              512K
L3 cache:              8192K
NUMA node0 CPU(s):    0-5,48-53
NUMA node1 CPU(s):    6-11,54-59
NUMA node2 CPU(s):    12-17,60-65
NUMA node3 CPU(s):    18-23,66-71
NUMA node4 CPU(s):    24-29,72-77
NUMA node5 CPU(s):    30-35,78-83
NUMA node6 CPU(s):    36-41,84-89
NUMA node7 CPU(s):    42-47,90-95
```

```
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
hw_pstate npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold vmcall avic fsgsbase bmi1 avx2 smep bmi2 rdseed adx smap
clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf overflow_recov succor smca
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen10**

(2.00 GHz, AMD EPYC 7401)

SPECrate2017\_int\_base = 222

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2017

**Hardware Availability:** Nov-2017

**Software Availability:** Sep-2017

## Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 48 49 50 51 52 53
node 0 size: 128775 MB
node 0 free: 128600 MB
node 1 cpus: 6 7 8 9 10 11 54 55 56 57 58 59
node 1 size: 129021 MB
node 1 free: 128833 MB
node 2 cpus: 12 13 14 15 16 17 60 61 62 63 64 65
node 2 size: 129021 MB
node 2 free: 128860 MB
node 3 cpus: 18 19 20 21 22 23 66 67 68 69 70 71
node 3 size: 129021 MB
node 3 free: 128838 MB
node 4 cpus: 24 25 26 27 28 29 72 73 74 75 76 77
node 4 size: 129021 MB
node 4 free: 128883 MB
node 5 cpus: 30 31 32 33 34 35 78 79 80 81 82 83
node 5 size: 129021 MB
node 5 free: 128877 MB
node 6 cpus: 36 37 38 39 40 41 84 85 86 87 88 89
node 6 size: 129021 MB
node 6 free: 128878 MB
node 7 cpus: 42 43 44 45 46 47 90 91 92 93 94 95
node 7 size: 128867 MB
node 7 free: 128721 MB
```

```
node distances:
node  0  1  2  3  4  5  6  7
 0:  10 16 16 16 32 32 32 32
 1:  16 10 16 16 32 32 32 32
 2:  16 16 10 16 32 32 32 32
 3:  16 16 16 10 32 32 32 32
 4:  32 32 32 32 10 16 16 16
 5:  32 32 32 32 16 10 16 16
 6:  32 32 32 32 16 16 10 16
 7:  32 32 32 32 16 16 16 10
```

From /proc/meminfo

MemTotal: 1056536240 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen10**

(2.00 GHz, AMD EPYC 7401)

SPECrate2017\_int\_base = 222

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2017

**Hardware Availability:** Nov-2017

**Software Availability:** Sep-2017

## Platform Notes (Continued)

```

/usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP3

From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 3
    # This file is deprecated and will be removed in a future service pack or release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP3"
    VERSION_ID="12.3"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
    Linux dl385g10-2 4.4.73-5-default #1 SMP Tue Jul 4 15:33:39 UTC 2017 (b7ce4e4) x86_64
    x86_64 x86_64 GNU/Linux

run-level 3 Jan 2 07:07

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   331G   57G  274G  18% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS HPE A40 11/17/2017
Memory:
    16x UNKNOWN NOT AVAILABLE
    16x UNKNOWN NOT AVAILABLE 64 GB 4 rank 2666

(End of data from sysinfo program)

```

## Compiler Version Notes

```

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
    557.xz_r(base)
=====

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen10**

(2.00 GHz, AMD EPYC 7401)

SPECrate2017\_int\_base = 222

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2017

**Hardware Availability:** Nov-2017

**Software Availability:** Sep-2017

## Compiler Version Notes (Continued)

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
CXXC 520.omnetpp\_r(base) 523.xalanbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
FC 548.exchange2\_r(base)

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.00 GHz, AMD EPYC 7401)

SPECrate2017\_int\_base = 222

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2017

**Hardware Availability:** Nov-2017

**Software Availability:** Sep-2017

## Base Portability Flags (Continued)

```

502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -ffast-math
-march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100
-fremap-arrays -mno-avx2 -inline-threshold=1000 -z muldefs -ljemalloc

```

C++ benchmarks:

```

-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3
-march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive
-fremap-arrays -inline-threshold=1000 -z muldefs -ljemalloc

```

Fortran benchmarks:

```

-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(gfortran)
-O3(clang) -mavx -madv -funroll-loops -ffast-math -z muldefs -Ofast
-fdefault-integer-8 -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-lsr-in-nested-loop -enable-iv-split
-inline-threshold:1000 -disable-vect-cmp" -ljemalloc -lgfortran
-lamdlibm

```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.xml>





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.00 GHz, AMD EPYC 7401)

SPECrate2017\_int\_base = 222

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2017

**Hardware Availability:** Nov-2017

**Software Availability:** Sep-2017

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-12-04 00:03:32-0500.

Report generated on 2019-02-21 12:44:25 by CPU2017 PDF formatter v6067.

Originally published on 2018-01-14.