



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 248

Huawei XH321 V5 (Intel Xeon Platinum 8176)

SPECrate2017_int_peak = 267

CPU2017 License: 3175


Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

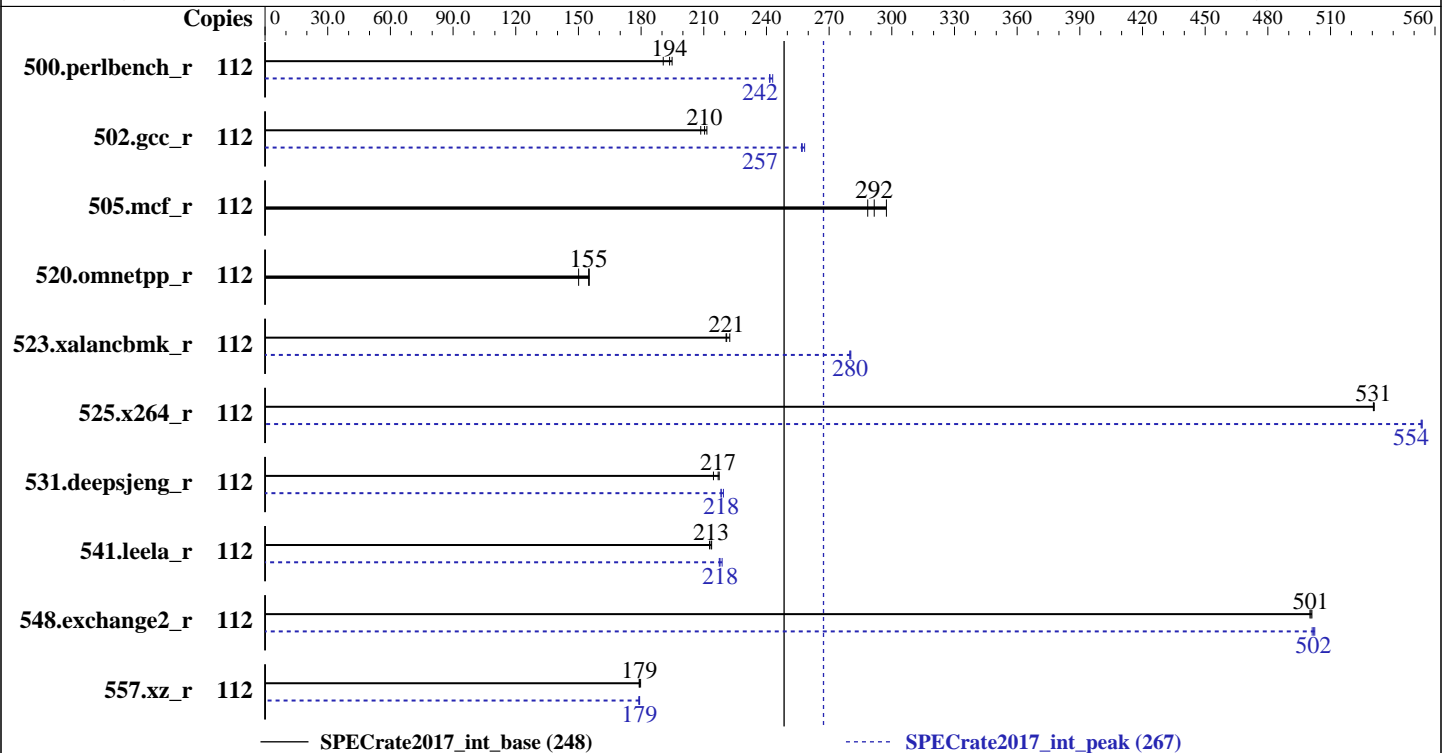

Hardware

CPU Name: Intel Xeon Platinum 8176
 Max MHz.: 3800
 Nominal: 2100
 Enabled: 56 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 1200 GB SAS, 10000 RPM
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 0.59 Released Feb-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library V5.0.1;



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 248

Huawei XH321 V5 (Intel Xeon Platinum 8176)

SPECrate2017_int_peak = 267

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: May-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	112	915	195	935	191	<u>921</u>	<u>194</u>	112	734	243	<u>738</u>	<u>242</u>	738	241
502.gcc_r	112	760	209	750	211	<u>754</u>	<u>210</u>	112	<u>617</u>	<u>257</u>	618	257	614	258
505.mcf_r	112	609	297	<u>621</u>	<u>292</u>	627	288	112	609	297	<u>621</u>	<u>292</u>	627	288
520.omnetpp_r	112	947	155	<u>949</u>	<u>155</u>	979	150	112	947	155	<u>949</u>	<u>155</u>	979	150
523.xalancbmk_r	112	532	222	536	221	<u>535</u>	<u>221</u>	112	423	280	<u>422</u>	<u>280</u>	422	280
525.x264_r	112	370	530	<u>370</u>	<u>531</u>	369	531	112	<u>354</u>	<u>554</u>	354	554	354	553
531.deepsjeng_r	112	590	217	598	215	<u>592</u>	<u>217</u>	112	585	219	<u>588</u>	<u>218</u>	588	218
541.leela_r	112	872	213	<u>869</u>	<u>213</u>	868	214	112	853	217	848	219	<u>852</u>	<u>218</u>
548.exchange2_r	112	587	500	586	501	<u>586</u>	<u>501</u>	112	584	502	<u>585</u>	<u>502</u>	585	501
557.xz_r	112	673	180	675	179	<u>675</u>	<u>179</u>	112	676	179	675	179	<u>675</u>	<u>179</u>

SPECrate2017_int_base = 248

SPECrate2017_int_peak = 267

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/spec/lib/ia32:/spec/lib/intel64:/spec/je5.0.1-32:/spec/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc: configured and built at default for
32bit (i686) and 64bit (x86_64) targets;
jemalloc: built with the RedHat Enterprise 7.4,
and the system compiler gcc 4.8.5;
jemalloc: sources available from jemalloc.net or

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 248

Huawei XH321 V5 (Intel Xeon Platinum 8176)

SPECrate2017_int_peak = 267

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

General Notes (Continued)

<https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Power Policy Set to Performance

SNC Set to Enabled

IMC Interleaving Set to 1-way Interleave

XPT Prefetch Set to Enabled

ADDDC Sparing Set to Disabled

Sysinfo program /spec/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on localhost.localdomain Wed May 16 10:55:31 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz

2 "physical id"s (chips)

112 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 28

siblings : 56

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29 30

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27 28 29 30

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 112

On-line CPU(s) list: 0-111

Thread(s) per core: 2

Core(s) per socket: 28

Socket(s): 2

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 248

Huawei XH321 V5 (Intel Xeon Platinum 8176)

SPECrate2017_int_peak = 267

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: May-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Platform Notes (Continued)

```

NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz
Stepping:              4
CPU MHz:               2100.000
BogoMIPS:              4204.70
Virtualization:       VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              39424K
NUMA node0 CPU(s):    0-3,7-9,14-17,21-23,56-59,63-65,70-73,77-79
NUMA node1 CPU(s):    4-6,10-13,18-20,24-27,60-62,66-69,74-76,80-83
NUMA node2 CPU(s):    28-31,35-37,42-45,49-51,84-87,91-93,98-101,105-107
NUMA node3 CPU(s):    32-34,38-41,46-48,52-55,88-90,94-97,102-104,108-111

```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 56 57 58 59 63 64 65 70 71 72 73 77 78 79
node 0 size: 96437 MB
node 0 free: 93863 MB
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 60 61 62 66 67 68 69 74 75 76 80 81 82 83
node 1 size: 98304 MB
node 1 free: 95865 MB
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 84 85 86 87 91 92 93 98 99 100 101 105 106 107
node 2 size: 98304 MB
node 2 free: 95102 MB
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 88 89 90 94 95 96 97 102 103 104 108 109 110 111
node 3 size: 98304 MB
node 3 free: 95940 MB
node distances:
node   0   1   2   3
0:   10  11  21  21
1:   11  10  21  21
2:   21  21  10  11
3:   21  21  11  10

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 248

Huawei XH321 V5 (Intel Xeon Platinum 8176)

SPECrate2017_int_peak = 267

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

Platform Notes (Continued)

From /proc/meminfo

MemTotal: 394174484 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.3 (Maipo)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="7.3"

PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"

ANSI_COLOR="0;31"

CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

uname -a:

Linux localhost.localdomain 3.10.0-693.11.6.el7.x86_64 #1 SMP Thu Dec 28 14:23:39 EST 2017 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 May 16 10:50

SPEC is set to: /spec

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda8	xf	325G	27G	299G	9%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.59 02/24/2018

Memory:

4x NO DIMM NO DIMM

12x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

```

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
   525.x264_r(base, peak) 557.xz_r(base, peak)
=====

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 248

Huawei XH321 V5 (Intel Xeon Platinum 8176)

SPECrate2017_int_peak = 267

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

Compiler Version Notes (Continued)

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalanbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(peak) 523.xalanbmk_r(peak) 531.deepsjeng_r(peak)
541.leela_r(peak)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base, peak)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 248

Huawei XH321 V5 (Intel Xeon Platinum 8176)

SPECrate2017_int_peak = 267

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 248

Huawei XH321 V5 (Intel Xeon Platinum 8176)

SPECrate2017_int_peak = 267

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: May-2018
Hardware Availability: Jul-2017
Software Availability: Jan-2018

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc

502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 248

Huawei XH321 V5 (Intel Xeon Platinum 8176)

SPECrate2017_int_peak = 267

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

Peak Optimization Flags (Continued)

```
557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

```
523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
531.deepsjeng_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
541.leela_r: Same as 531.deepsjeng_r
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Other Flags

C benchmarks (except as noted below):

```
-m64 -std=c11
```

```
502.gcc_r: -m32 -std=c11
```

C++ benchmarks (except as noted below):

```
-m64
```

```
523.xalancbmk_r: -m32
```

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017_int_base = 248

Huawei XH321 V5 (Intel Xeon Platinum 8176)

SPECrate2017_int_peak = 267

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-05-16 10:55:30-0400.

Report generated on 2018-10-31 17:56:03 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-12.