



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate2017\_int\_base = 199

PowerEdge R740xd2 (Intel Xeon Gold 6152, 2.10GHz)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 55


Test Date: Oct-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2016

Tested by: Dell Inc.

Software Availability: Apr-2018

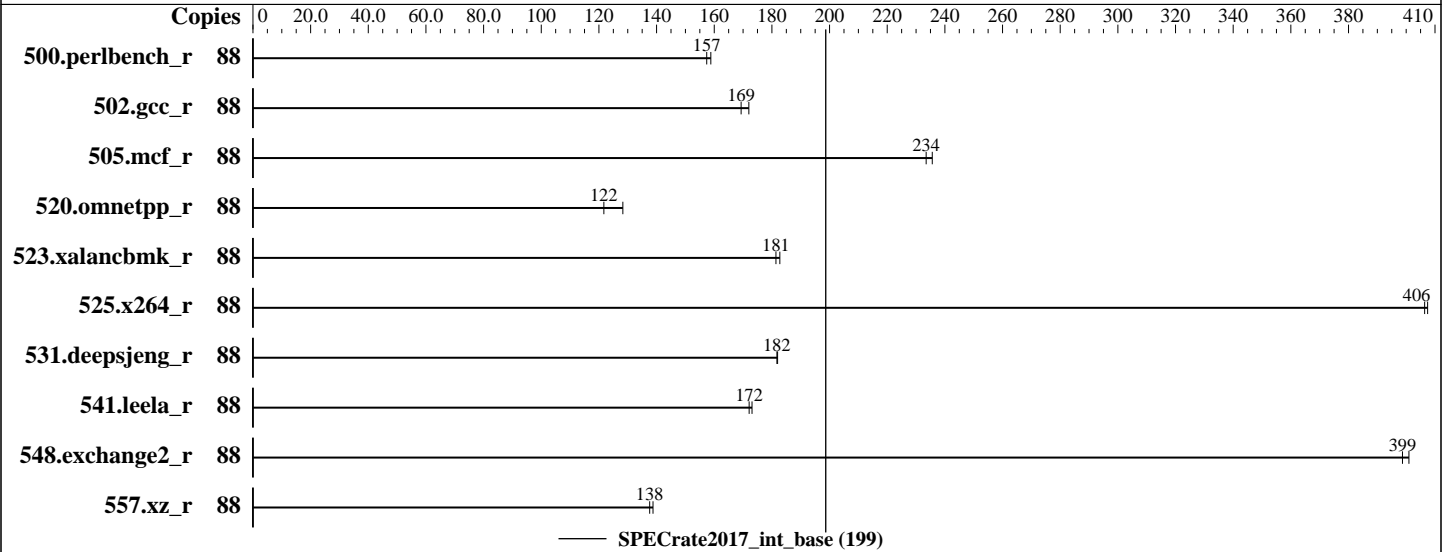

### Hardware

CPU Name: Intel Xeon Gold 6152  
 Max MHz.: 3700  
 Nominal: 2100  
 Enabled: 44 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 30.25 MB I+D on chip per chip  
 Other: None  
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 1 x 250 GB M.2 SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3  
 kernel 4.4.114-94.11  
 Compiler: C/C++: Version 18.0.2.20180210 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.2.20180210 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Version 1.0.2 released Oct-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc memory allocator v5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 199

PowerEdge R740xd2 (Intel Xeon Gold 6152, 2.10GHz)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Oct-2018  
Hardware Availability: Dec-2016  
Software Availability: Apr-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	88	882	159	<b>890</b>	<b>157</b>									
502.gcc_r	88	724	172	<b>736</b>	<b>169</b>									
505.mcf_r	88	604	236	<b>609</b>	<b>234</b>									
520.omnetpp_r	88	900	128	<b>949</b>	<b>122</b>									
523.xalancbmk_r	88	<b>512</b>	<b>181</b>	508	183									
525.x264_r	88	<b>379</b>	<b>406</b>	378	407									
531.deepsjeng_r	88	554	182	<b>555</b>	<b>182</b>									
541.leela_r	88	<b>847</b>	<b>172</b>	842	173									
548.exchange2_r	88	575	401	<b>578</b>	<b>399</b>									
557.xz_r	88	685	139	<b>691</b>	<b>138</b>									

SPECrate2017\_int\_base = 199

SPECrate2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 199

PowerEdge R740xd2 (Intel Xeon Gold 6152, 2.10GHz)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2018

Hardware Availability: Dec-2016

Software Availability: Apr-2018

## General Notes (Continued)

numactl --interleave=all runcpu <etc>  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:

Sub NUMA Cluster Enabled

Virtualization Technology Disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E Disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub Disabled

Logical Processor Enabled

CPU Interconnect Bus Link Power Management Disabled

PCI ASPM L1 Link Power Management Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-m8ku Tue Oct 23 16:13:08 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6152 CPU @ 2.10GHz

2 "physical id"s (chips)

88 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 22

siblings : 44

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 88

On-line CPU(s) list: 0-87

Thread(s) per core: 2

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 199

PowerEdge R740xd2 (Intel Xeon Gold 6152, 2.10GHz)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 55

Test Date: Oct-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2016

Tested by: Dell Inc.

Software Availability: Apr-2018

## Platform Notes (Continued)

```

Core(s) per socket: 22
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6152 CPU @ 2.10GHz
Stepping: 4
CPU MHz: 2095.085
BogoMIPS: 4190.17
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 30976K

```

```

NUMA node0 CPU(s):
0, 4, 8, 12, 16, 20, 24, 28, 32, 36, 40, 44, 48, 52, 56, 60, 64, 68, 72, 76, 80, 84
NUMA node1 CPU(s):
1, 5, 9, 13, 17, 21, 25, 29, 33, 37, 41, 45, 49, 53, 57, 61, 65, 69, 73, 77, 81, 85
NUMA node2 CPU(s):
2, 6, 10, 14, 18, 22, 26, 30, 34, 38, 42, 46, 50, 54, 58, 62, 66, 70, 74, 78, 82, 86
NUMA node3 CPU(s):
3, 7, 11, 15, 19, 23, 27, 31, 35, 39, 43, 47, 51, 55, 59, 63, 67, 71, 75, 79, 83, 87

```

```

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 30976 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84
node 0 size: 46907 MB
node 0 free: 46613 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77 81 85
node 1 size: 48373 MB
node 1 free: 48162 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78 82 86

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 199

PowerEdge R740xd2 (Intel Xeon Gold 6152, 2.10GHz)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 55

Test Date: Oct-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2016

Tested by: Dell Inc.

Software Availability: Apr-2018

## Platform Notes (Continued)

```

node 2 size: 48373 MB
node 2 free: 48173 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79 83 87
node 3 size: 48371 MB
node 3 free: 48168 MB
node distances:
node 0 1 2 3
0: 10 21 11 21
1: 21 10 21 11
2: 11 21 10 21
3: 21 11 21 10

```

```

From /proc/meminfo
MemTotal:      196634728 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"

```

```

uname -a:
Linux linux-m8ku 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2017-5754 (Meltdown):      Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Barriers
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB

```

run-level 3 Oct 23 16:09 last=5

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 199

PowerEdge R740xd2 (Intel Xeon Gold 6152, 2.10GHz)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 55

Test Date: Oct-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2016

Tested by: Dell Inc.

Software Availability: Apr-2018

## Platform Notes (Continued)

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb4	xf	182G	4.0G	178G	3%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.2 10/19/2018

Memory:

12x 002C04B3002C 18ASF2G72PDZ-2G6E1 16 GB 2 rank 2666

4x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
   557.xz_r(base)
-----
```

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

```
=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      541.leela_r(base)
-----
```

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

```
=====
FC 548.exchange2_r(base)
-----
```

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 199

PowerEdge R740xd2 (Intel Xeon Gold 6152, 2.10GHz)

SPECrate2017\_int\_peak = Not Run

CPU2017 License: 55

Test Date: Oct-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2016

Tested by: Dell Inc.

Software Availability: Apr-2018

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revD.2018-07-24.html>



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 199

PowerEdge R740xd2 (Intel Xeon Gold 6152, 2.10GHz)

SPECrate2017\_int\_peak = Not Run

**CPU2017 License:** 55

**Test Date:** Oct-2018

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Dec-2016

**Tested by:** Dell Inc.

**Software Availability:** Apr-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revD.2018-07-24.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2018-10-23 17:13:07-0400.

Report generated on 2018-11-27 13:28:33 by CPU2017 PDF formatter v6067.

Originally published on 2018-11-27.