



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_int_base = 11.6

Express5800/GT110i (Intel Pentium G4560)

SPECrate2017_int_peak = 12.4

CPU2017 License: 9006


Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jan-2019

Hardware Availability: Apr-2017

Software Availability: Mar-2018

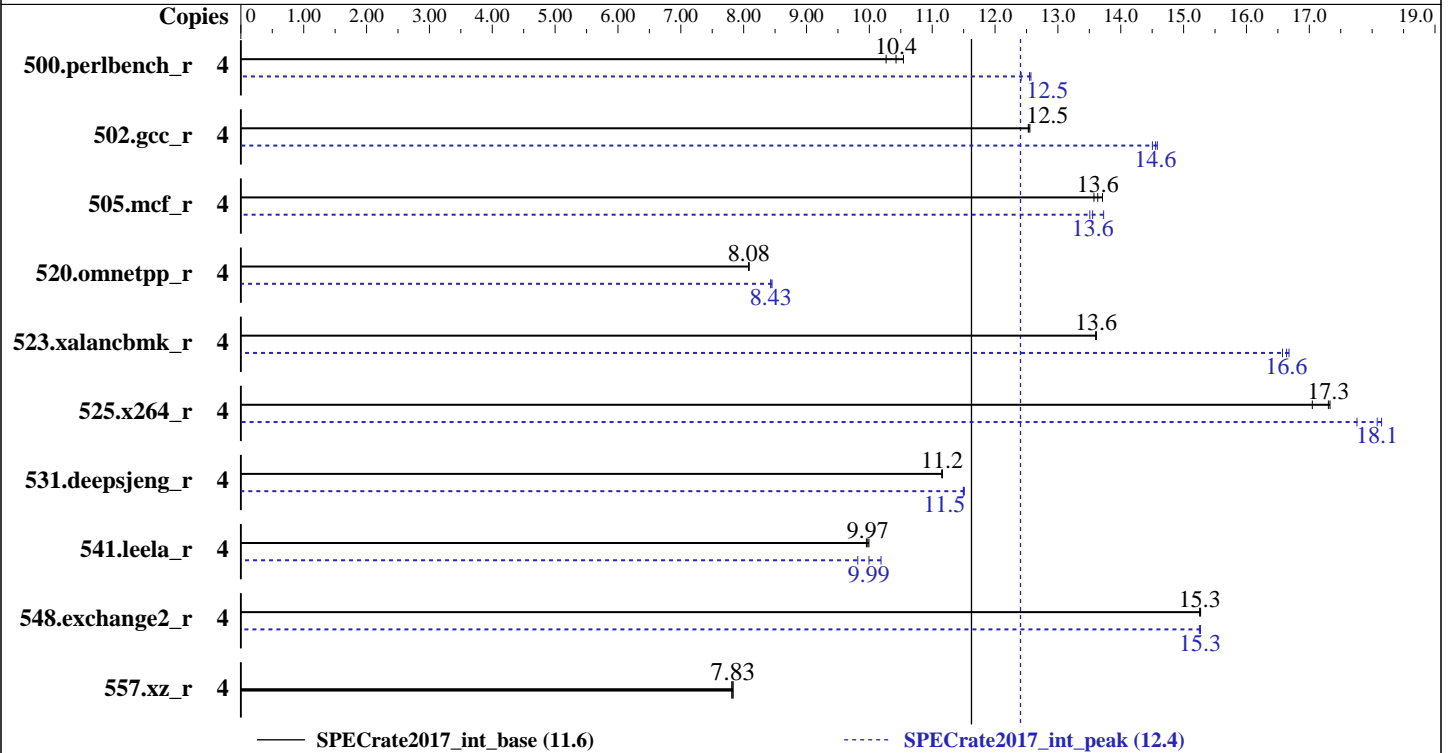

Hardware

CPU Name: Intel Pentium G4560
 Max MHz.: 3500
 Nominal: 3500
 Enabled: 2 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 256 KB I+D on chip per core
 L3: 3 MB I+D on chip per chip
 Other: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2400T-E)
 Storage: 1 x 1 TB SATA, 7200 RPM
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)
 Kernel 3.10.0-693.21.1.el7.x86_64
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: NEC BIOS Version 5.0.4008 06/07/2018 released Aug-2018
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_int_base = 11.6

Express5800/GT110i (Intel Pentium G4560)

SPECrate2017_int_peak = 12.4

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Jan-2019
Hardware Availability: Apr-2017
Software Availability: Mar-2018

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	4	620	10.3	604	10.5	<u>611</u>	<u>10.4</u>	4	507	12.6	<u>507</u>	<u>12.5</u>	513	12.4
502.gcc_r	4	451	12.6	452	12.5	<u>452</u>	<u>12.5</u>	4	388	14.6	391	14.5	<u>389</u>	<u>14.6</u>
505.mcf_r	4	476	13.6	472	13.7	<u>474</u>	<u>13.6</u>	4	<u>477</u>	<u>13.6</u>	471	13.7	479	13.5
520.omnetpp_r	4	<u>649</u>	<u>8.08</u>	649	8.09	650	8.08	4	623	8.43	621	8.45	<u>622</u>	<u>8.43</u>
523.xalancbmk_r	4	<u>310</u>	<u>13.6</u>	310	13.6	311	13.6	4	255	16.6	<u>254</u>	<u>16.6</u>	253	16.7
525.x264_r	4	411	17.0	<u>405</u>	<u>17.3</u>	404	17.3	4	394	17.8	386	18.2	<u>387</u>	<u>18.1</u>
531.deepsjeng_r	4	411	11.2	411	11.2	<u>411</u>	<u>11.2</u>	4	<u>399</u>	<u>11.5</u>	398	11.5	399	11.5
541.leela_r	4	666	9.95	663	9.99	<u>664</u>	<u>9.97</u>	4	650	10.2	675	9.82	<u>663</u>	<u>9.99</u>
548.exchange2_r	4	<u>687</u>	<u>15.3</u>	686	15.3	687	15.3	4	<u>687</u>	<u>15.3</u>	687	15.3	686	15.3
557.xz_r	4	<u>552</u>	<u>7.83</u>	553	7.81	552	7.83	4	<u>552</u>	<u>7.83</u>	553	7.81	552	7.83

SPECrate2017_int_base = 11.6

SPECrate2017_int_peak = 12.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;

jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_int_base = 11.6

Express5800/GT110i (Intel Pentium G4560)

SPECrate2017_int_peak = 12.4

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Jan-2019
Hardware Availability: Apr-2017
Software Availability: Mar-2018

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Power Management Policy: Custom
Energy Performance: Performance
DCU Streamer Prefetcher: Disabled
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on gt110i Thu Jan 10 09:38:34 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Pentium(R) CPU G4560 @ 3.50GHz
 1 "physical id"s (chips)
 4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 2
siblings : 4
physical 0: cores 0 1
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 4
On-line CPU(s) list: 0-3
Thread(s) per core: 2
Core(s) per socket: 2
Socket(s): 1
NUMA node(s): 1
Vendor ID: GenuineIntel
CPU family: 6
Model: 158
Model name: Intel(R) Pentium(R) CPU G4560 @ 3.50GHz
Stepping: 9
CPU MHz: 3028.457
CPU max MHz: 3500.0000
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_int_base = 11.6

Express5800/GT110i (Intel Pentium G4560)

SPECrate2017_int_peak = 12.4

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Jan-2019
Hardware Availability: Apr-2017
Software Availability: Mar-2018

Platform Notes (Continued)

CPU min MHz: 800.0000
BogoMIPS: 7008.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 256K
L3 cache: 3072K
NUMA node0 CPU(s): 0-3

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx est tm2 ssse3 cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave rdrand lahf_lm abm 3dnowprefetch epb invpcid_single intel_pt spec_ctrl ibpb_support tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust smep erms invpcid mpx rdseed smap clflushopt xsaveopt xsavec xgetbv1 dtherm arat pln pts hwp hwp_notify hwp_act_window hwp_epp

```
/proc/cpuinfo cache data
cache size : 3072 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3
node 0 size: 65480 MB
node 0 free: 63624 MB
node distances:
node 0
0: 10
```

From /proc/meminfo

```
MemTotal: 65921396 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.4 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.4"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_int_base = 11.6

Express5800/GT110i (Intel Pentium G4560)

SPECrate2017_int_peak = 12.4

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Jan-2019
Hardware Availability: Apr-2017
Software Availability: Mar-2018

Platform Notes (Continued)

```
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

```
uname -a:
Linux gt110i 3.10.0-693.21.1.el7.x86_64 #1 SMP Fri Feb 23 18:54:16 UTC 2018 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 10 09:32
```

```
SPEC is set to: /home/cpu2017
```

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       ext4  909G  125G  738G  15% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 5.0.4008 06/07/2018
```

```
Memory:
```

```
4x Micron 18ASF2G72AZ-2G3B1 16 GB 2 rank 2400
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)
=====
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====
```

```
=====  
CC 500.perlbench_r(peak) 502.gcc_r(peak)
=====
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====
```

```
=====  
CXXC 520.omnetpp_r(base) 523.xalanbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)
=====
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_int_base = 11.6

Express5800/GT110i (Intel Pentium G4560)

SPECrate2017_int_peak = 12.4

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Jan-2019
Hardware Availability: Apr-2017
Software Availability: Mar-2018

Compiler Version Notes (Continued)

=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
541.leela_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base, peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_int_base = 11.6

Express5800/GT110i (Intel Pentium G4560)

SPECrate2017_int_peak = 12.4

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jan-2019

Hardware Availability: Apr-2017

Software Availability: Mar-2018

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Fortran benchmarks:

```
ifort
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
```

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_int_base = 11.6

Express5800/GT110i (Intel Pentium G4560)

SPECrate2017_int_peak = 12.4

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jan-2019

Hardware Availability: Apr-2017

Software Availability: Mar-2018

Peak Portability Flags (Continued)

```
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xSSE4.2 -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -fno-strict-overflow
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xSSE4.2 -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-32/lib
-ljemalloc
```

```
505.mcf_r: -Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div
-qopt-prefetch -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
525.x264_r: -Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div
-qopt-prefetch -qopt-mem-layout-trans=3 -fno-alias
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
557.xz_r: basepeak = yes
```

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xSSE4.2 -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

```
523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xSSE4.2 -O3 -no-prec-div -qopt-prefetch
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate2017_int_base = 11.6

Express5800/GT110i (Intel Pentium G4560)

SPECrate2017_int_peak = 12.4

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jan-2019

Hardware Availability: Apr-2017

Software Availability: Mar-2018

Peak Optimization Flags (Continued)

523.xalancbmk_r (continued):

```
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-32/lib  
-ljemalloc
```

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Other Flags

C benchmarks (except as noted below):

```
-m64 -std=c11
```

502.gcc_r: -m32 -std=c11

C++ benchmarks (except as noted below):

```
-m64
```

523.xalancbmk_r: -m32

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-110i-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-110i-RevA.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2019-01-09 19:38:33-0500.

Report generated on 2019-02-05 13:46:57 by CPU2017 PDF formatter v6067.

Originally published on 2019-02-05.