



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6134, 3.20 GHz)

SPECrate®2017_fp_base = 266

SPECrate®2017_fp_peak = 269

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2019

Hardware Availability: Aug-2017

Software Availability: Oct-2018

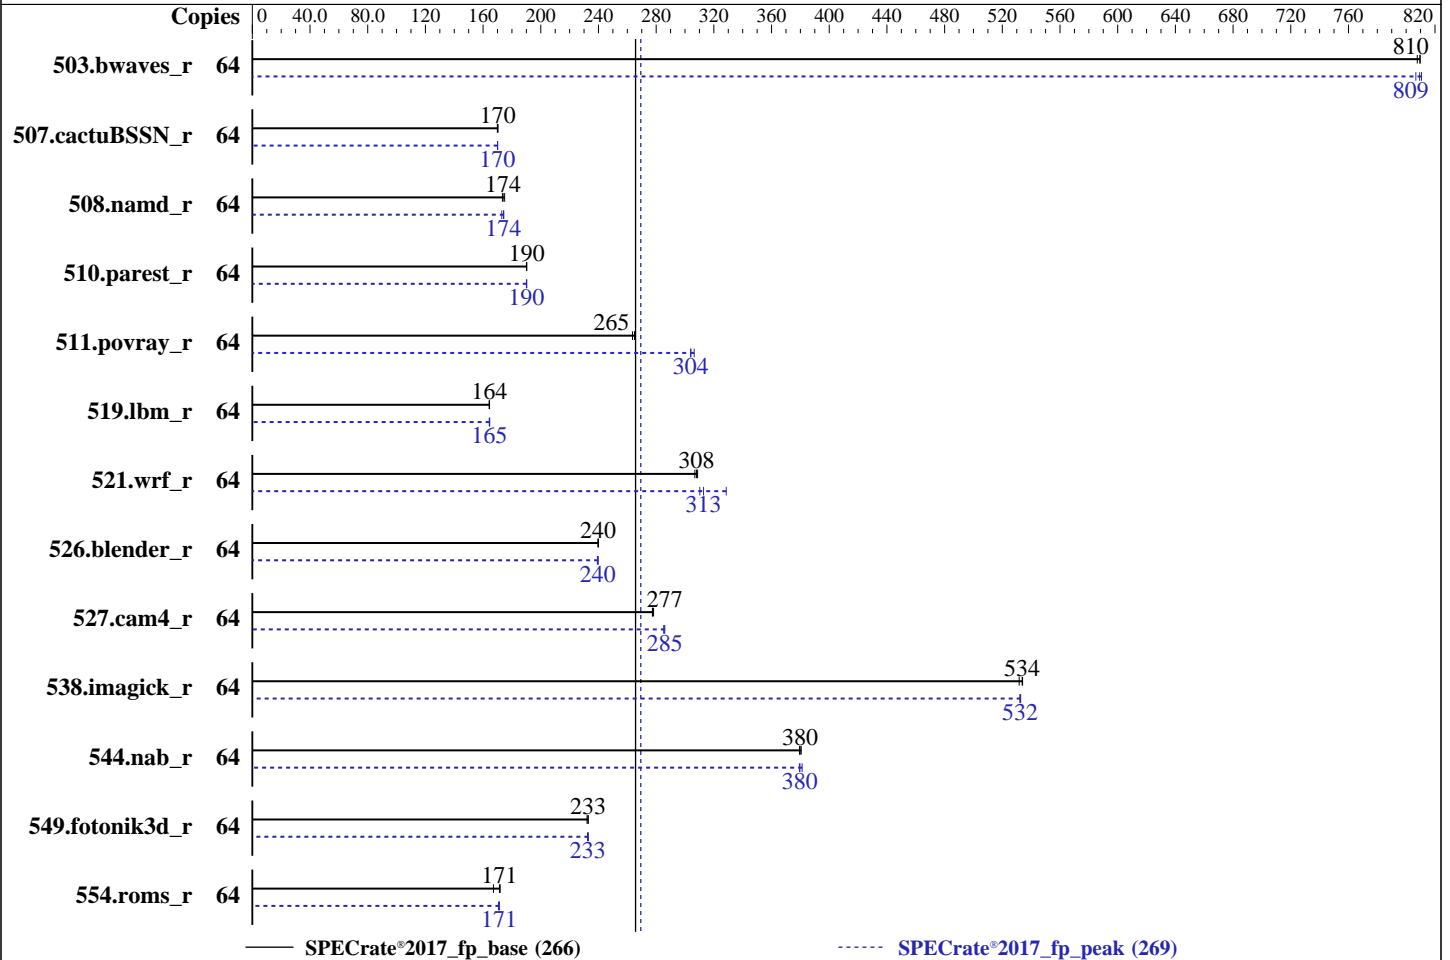

Hardware

CPU Name: Intel Xeon Gold 6134
 Max MHz: 3700
 Nominal: 3200
 Enabled: 32 cores, 4 chips, 2 threads/core
 Orderable: 2,4 Chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 1 TB HDD, 7.2K RPM
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86_64) 4.4.120-92.70-default
 Compiler: C/C++: Version 19.0.0.117 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.0.0.117 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 3.1.3e released Jun-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: --



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6134, 3.20 GHz)

SPECrate®2017_fp_base = 266

SPECrate®2017_fp_peak = 269

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2019
Hardware Availability: Aug-2017
Software Availability: Oct-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	795	808	793	810	793	810	64	792	811	796	807	793	809
507.cactuBSSN_r	64	477	170	476	170	476	170	64	476	170	477	170	476	170
508.namd_r	64	348	175	351	173	350	174	64	349	174	349	174	352	173
510.parest_r	64	880	190	880	190	881	190	64	881	190	881	190	880	190
511.povray_r	64	564	265	564	265	567	264	64	488	306	492	304	492	304
519.lbm_r	64	410	164	410	164	411	164	64	410	165	410	165	411	164
521.wrf_r	64	464	309	467	307	465	308	64	436	329	462	310	458	313
526.blender_r	64	407	240	406	240	406	240	64	407	240	407	239	407	240
527.cam4_r	64	403	277	404	277	402	278	64	392	285	392	285	391	286
538.imagick_r	64	298	534	298	534	299	532	64	299	533	299	532	299	532
544.nab_r	64	283	381	284	379	284	380	64	284	380	283	381	284	379
549.fotonik3d_r	64	1072	233	1071	233	1075	232	64	1073	232	1070	233	1072	233
554.roms_r	64	608	167	594	171	592	172	64	594	171	594	171	596	171

SPECrate®2017_fp_base = 266

SPECrate®2017_fp_peak = 269

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation

Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6134, 3.20 GHz)

SPECrate®2017_fp_base = 266

SPECrate®2017_fp_peak = 269

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2019
Hardware Availability: Aug-2017
Software Availability: Oct-2018

General Notes (Continued)

is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Intel HyperThreading Technology set to Enabled
CPU performance set to Enterprise
Power Performance Tuning set to OS Controls
SNC set to Enabled
IMC Interleaving set to 1-way Interleave
Patrol Scrub set to Disabled
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-9r4j Tue Jan 29 06:03:25 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6134 CPU @ 3.20GHz
 4 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings  : 16
physical 0: cores 0 2 3 9 16 19 26 27
physical 1: cores 0 2 3 9 16 19 26 27
physical 2: cores 0 1 2 3 10 11 24 27
physical 3: cores 1 3 4 6 7 18 20 22
```

```
From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 64
On-line CPU(s) list:   0-63
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6134, 3.20 GHz)

SPECrate®2017_fp_base = 266

SPECrate®2017_fp_peak = 269

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2019
Hardware Availability: Aug-2017
Software Availability: Oct-2018

Platform Notes (Continued)

```

Model: 85
Model name: Intel(R) Xeon(R) Gold 6134 CPU @ 3.20GHz
Stepping: 4
CPU MHz: 3700.000
CPU max MHz: 3700.0000
CPU min MHz: 1200.0000
BogoMIPS: 6393.11
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0,1,3,4,32,33,35,36
NUMA node1 CPU(s): 2,5-7,34,37-39
NUMA node2 CPU(s): 8,9,11,12,40,41,43,44
NUMA node3 CPU(s): 10,13-15,42,45-47
NUMA node4 CPU(s): 16-18,22,48-50,54
NUMA node5 CPU(s): 19-21,23,51-53,55
NUMA node6 CPU(s): 24-26,29,56-58,61
NUMA node7 CPU(s): 27,28,30,31,59,60,62,63
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl stibp
retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt
clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 3 4 32 33 35 36
node 0 size: 192094 MB
node 0 free: 185171 MB
node 1 cpus: 2 5 6 7 34 37 38 39
node 1 size: 193528 MB
node 1 free: 189975 MB
node 2 cpus: 8 9 11 12 40 41 43 44
node 2 size: 193528 MB
node 2 free: 189907 MB
node 3 cpus: 10 13 14 15 42 45 46 47

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6134, 3.20 GHz)

SPECrate®2017_fp_base = 266

SPECrate®2017_fp_peak = 269

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2019

Hardware Availability: Aug-2017

Software Availability: Oct-2018

Platform Notes (Continued)

```

node 3 size: 193528 MB
node 3 free: 190228 MB
node 4 cpus: 16 17 18 22 48 49 50 54
node 4 size: 193528 MB
node 4 free: 190076 MB
node 5 cpus: 19 20 21 23 51 52 53 55
node 5 size: 193528 MB
node 5 free: 189678 MB
node 6 cpus: 24 25 26 29 56 57 58 61
node 6 size: 193528 MB
node 6 free: 189905 MB
node 7 cpus: 27 28 30 31 59 60 62 63
node 7 size: 193525 MB
node 7 free: 190243 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 11 21 21 21 21 21 21
  1: 11 10 21 21 21 21 21 21
  2: 21 21 10 11 21 21 21 21
  3: 21 21 11 10 21 21 21 21
  4: 21 21 21 21 10 11 21 21
  5: 21 21 21 21 11 10 21 21
  6: 21 21 21 21 21 21 10 11
  7: 21 21 21 21 21 21 11 10

```

From /proc/meminfo

```

MemTotal:      1583913440 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

uname -a:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6134, 3.20 GHz)

SPECrate®2017_fp_base = 266

SPECrate®2017_fp_peak = 269

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2019
Hardware Availability: Aug-2017
Software Availability: Oct-2018

Platform Notes (Continued)

```
Linux linux-9r4j 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB
```

```
run-level 3 Dec 20 11:00
```

SPEC is set to: /home/cpu2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal        xfs   930G   63G  868G   7% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Cisco Systems, Inc. C480M5.3.1.3e.0.0613181101 06/13/2018
```

Memory:

```
48x 0xCE00 M393A4K40BB2-CTD 32 GB 2 rank 2666
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)  
  | 544.nab_r(base, peak)  
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)  
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)  
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6134, 3.20 GHz)

SPECrate®2017_fp_base = 266

SPECrate®2017_fp_peak = 269

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2019
Hardware Availability: Aug-2017
Software Availability: Oct-2018

Compiler Version Notes (Continued)

```
-----
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                  | 554.roms_r(base, peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6134,
3.20 GHz)

SPECrate®2017_fp_base = 266

SPECrate®2017_fp_peak = 269

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2019
Hardware Availability: Aug-2017
Software Availability: Oct-2018

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64  
507.cactuBSSN_r: -DSPEC_LP64  
508.namd_r: -DSPEC_LP64  
510.parest_r: -DSPEC_LP64  
511.povray_r: -DSPEC_LP64  
519.lbm_r: -DSPEC_LP64  
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char  
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG  
538.imagick_r: -DSPEC_LP64  
544.nab_r: -DSPEC_LP64  
549.fotonik3d_r: -DSPEC_LP64  
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6134,
3.20 GHz)

SPECrate®2017_fp_base = 266

SPECrate®2017_fp_peak = 269

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2019

Hardware Availability: Aug-2017

Software Availability: Oct-2018

Base Optimization Flags (Continued)

C++ benchmarks (continued):

`-ffinite-math-only -qopt-mem-layout-trans=3`

Fortran benchmarks:

`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -auto
-nostandard-realloc-lhs -align array32byte`

Benchmarks using both Fortran and C:

`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -auto
-nostandard-realloc-lhs -align array32byte`

Benchmarks using both C and C++:

`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3`

Benchmarks using Fortran, C, and C++:

`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -auto
-nostandard-realloc-lhs -align array32byte`

Peak Compiler Invocation

C benchmarks:

`icc -m64 -std=c11`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:

`icpc -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:

`icpc -m64 icc -m64 -std=c11 ifort -m64`



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6134,
3.20 GHz)

SPECrate®2017_fp_base = 266

SPECrate®2017_fp_peak = 269

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2019

Hardware Availability: Aug-2017

Software Availability: Oct-2018

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

544.nab_r: Same as 538.imagick_r

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

```
510.parest_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -auto  
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d_r: Same as 503.bwaves_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs  
-align array32byte
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 6134,
3.20 GHz)

SPECrate®2017_fp_base = 266

SPECrate®2017_fp_peak = 269

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2019

Hardware Availability: Aug-2017

Software Availability: Oct-2018

Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

```
526.blender_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -auto  
-nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-01-29 06:03:24-0500.

Report generated on 2020-07-01 13:41:54 by CPU2017 PDF formatter v6255.

Originally published on 2019-02-19.