



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate®2017\_fp\_base = 298

SPECrate®2017\_fp\_peak = 302

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2019

Hardware Availability: Aug-2017

Software Availability: Oct-2018

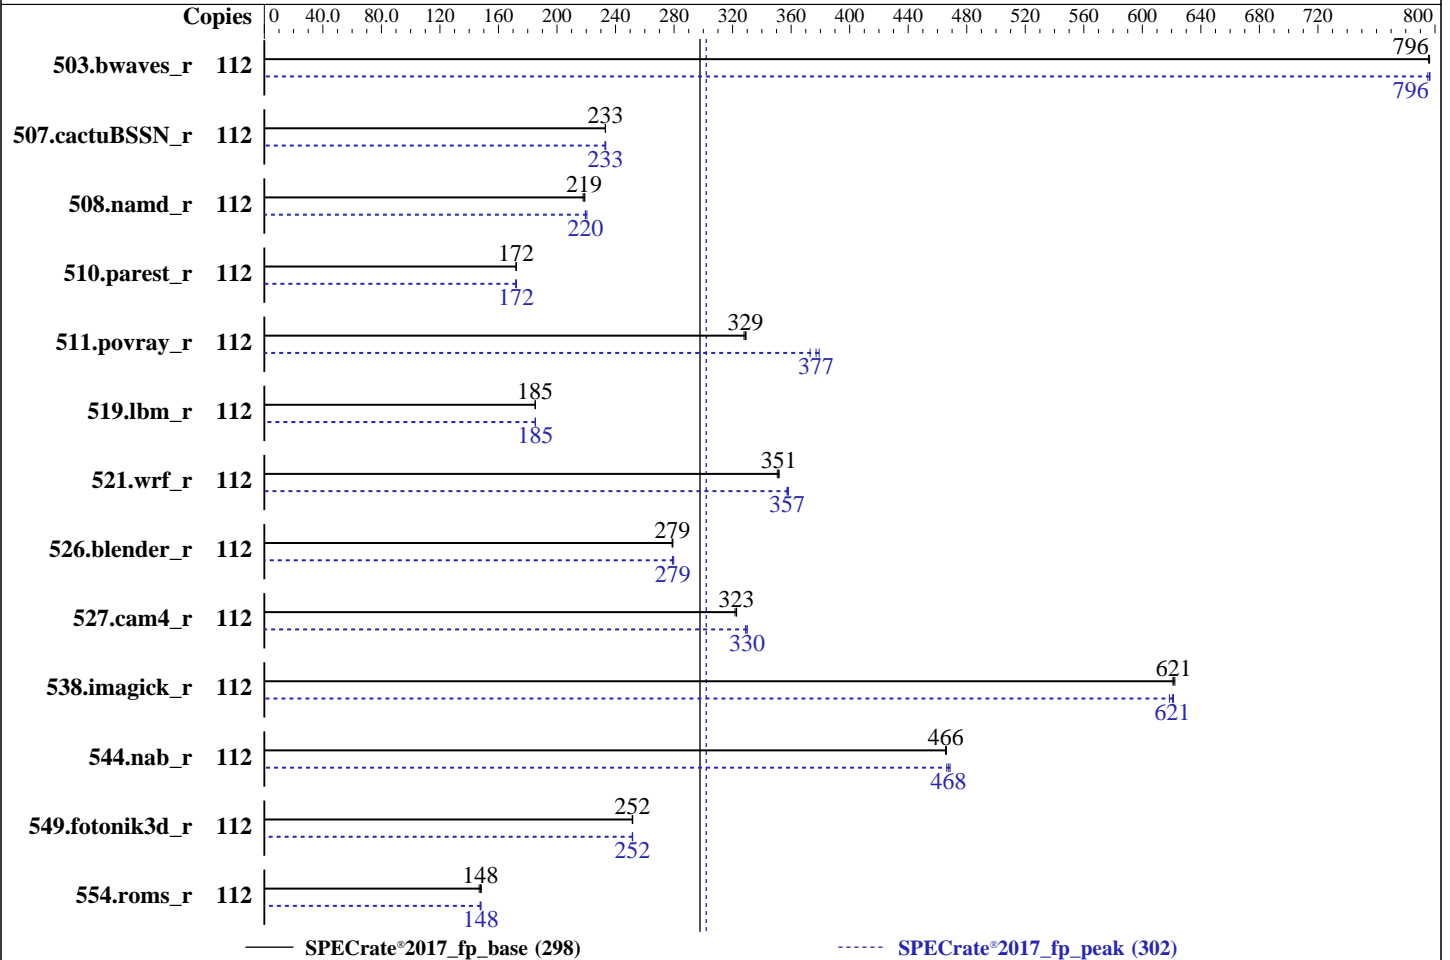

### Hardware

CPU Name: Intel Xeon Gold 5120  
 Max MHz: 3200  
 Nominal: 2200  
 Enabled: 56 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 Chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 19.25 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)  
 Storage: 1 x 1 TB HDD, 7.2K RPM  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86\_64) 4.4.120-92.70-default  
 Compiler: C/C++: Version 19.0.0.117 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 19.0.0.117 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version 3.1.3e released Jun-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: --



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate®2017\_fp\_base = 298

SPECrate®2017\_fp\_peak = 302

CPU2017 License: 9019  
Test Sponsor: Cisco Systems  
Tested by: Cisco Systems

Test Date: Feb-2019  
Hardware Availability: Aug-2017  
Software Availability: Oct-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	1411	796	1410	796	<b>1411</b>	<b>796</b>	112	<b>1410</b>	<b>796</b>	1410	797	1413	795
507.cactuBSSN_r	112	<b>608</b>	<b>233</b>	608	233	609	233	112	608	233	<b>608</b>	<b>233</b>	609	233
508.namd_r	112	<b>487</b>	<b>219</b>	486	219	488	218	112	<b>485</b>	<b>220</b>	485	219	483	220
510.parest_r	112	<b>1703</b>	<b>172</b>	1703	172	1701	172	112	<b>1703</b>	<b>172</b>	1701	172	1706	172
511.povray_r	112	<b>795</b>	<b>329</b>	794	329	798	328	112	690	379	701	373	<b>694</b>	<b>377</b>
519.lbm_r	112	638	185	<b>638</b>	<b>185</b>	637	185	112	<b>637</b>	<b>185</b>	637	185	638	185
521.wrf_r	112	713	352	716	351	<b>714</b>	<b>351</b>	112	<b>702</b>	<b>357</b>	700	358	702	357
526.blender_r	112	612	279	611	279	<b>612</b>	<b>279</b>	112	<b>611</b>	<b>279</b>	610	280	612	279
527.cam4_r	112	<b>607</b>	<b>323</b>	607	323	609	322	112	<b>594</b>	<b>330</b>	596	329	594	330
538.imagick_r	112	<b>448</b>	<b>621</b>	448	622	449	621	112	<b>449</b>	<b>621</b>	450	619	448	621
544.nab_r	112	404	466	<b>405</b>	<b>466</b>	405	466	112	404	466	402	469	<b>403</b>	<b>468</b>
549.fotonik3d_r	112	1734	252	1736	251	<b>1735</b>	<b>252</b>	112	1734	252	<b>1734</b>	<b>252</b>	1736	251
554.roms_r	112	<b>1205</b>	<b>148</b>	1200	148	1212	147	112	1207	147	1202	148	<b>1203</b>	<b>148</b>

SPECrate®2017\_fp\_base = 298

SPECrate®2017\_fp\_peak = 302

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate®2017\_fp\_base = 298

SPECrate®2017\_fp\_peak = 302

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2019  
**Hardware Availability:** Aug-2017  
**Software Availability:** Oct-2018

### General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS Settings:  
Intel HyperThreading Technology set to Enabled  
CPU performance set to Enterprise  
Power Performance Tuning set to OS Controls  
SNC set to Enabled  
IMC Interleaving set to 1-way Interleave  
Patrol Scrub set to Disabled  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-9r4j Sun Feb 3 05:58:13 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz
 4 "physical id"s (chips)
112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 14
siblings  : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
```

```
From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 112
On-line CPU(s) list:   0-111
Thread(s) per core:    2
Core(s) per socket:    14
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate®2017\_fp\_base = 298

SPECrate®2017\_fp\_peak = 302

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2019  
**Hardware Availability:** Aug-2017  
**Software Availability:** Oct-2018

### Platform Notes (Continued)

```

Model: 85
Model name: Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz
Stepping: 4
CPU MHz: 2599.999
CPU max MHz: 3200.0000
CPU min MHz: 1000.0000
BogoMIPS: 4395.29
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 19712K
NUMA node0 CPU(s): 0-3,7-9,56-59,63-65
NUMA node1 CPU(s): 4-6,10-13,60-62,66-69
NUMA node2 CPU(s): 14-17,21-23,70-73,77-79
NUMA node3 CPU(s): 18-20,24-27,74-76,80-83
NUMA node4 CPU(s): 28-31,35-37,84-87,91-93
NUMA node5 CPU(s): 32-34,38-41,88-90,94-97
NUMA node6 CPU(s): 42-45,49-51,98-101,105-107
NUMA node7 CPU(s): 46-48,52-55,102-104,108-111
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl stibp
retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt
clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 19712 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 9 56 57 58 59 63 64 65
node 0 size: 192093 MB
node 0 free: 183106 MB
node 1 cpus: 4 5 6 10 11 12 13 60 61 62 66 67 68 69
node 1 size: 193528 MB
node 1 free: 187660 MB
node 2 cpus: 14 15 16 17 21 22 23 70 71 72 73 77 78 79
node 2 size: 193528 MB
node 2 free: 187649 MB
node 3 cpus: 18 19 20 24 25 26 27 74 75 76 80 81 82 83

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate®2017\_fp\_base = 298

SPECrate®2017\_fp\_peak = 302

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2019

Hardware Availability: Aug-2017

Software Availability: Oct-2018

### Platform Notes (Continued)

```

node 3 size: 193528 MB
node 3 free: 187936 MB
node 4 cpus: 28 29 30 31 35 36 37 84 85 86 87 91 92 93
node 4 size: 193528 MB
node 4 free: 187488 MB
node 5 cpus: 32 33 34 38 39 40 41 88 89 90 94 95 96 97
node 5 size: 193528 MB
node 5 free: 187785 MB
node 6 cpus: 42 43 44 45 49 50 51 98 99 100 101 105 106 107
node 6 size: 193528 MB
node 6 free: 187911 MB
node 7 cpus: 46 47 48 52 53 54 55 102 103 104 108 109 110 111
node 7 size: 193525 MB
node 7 free: 187845 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  11  21  21  21  21  31  31
  1:  11  10  21  21  21  21  31  31
  2:  21  21  10  11  31  31  21  21
  3:  21  21  11  10  31  31  21  21
  4:  21  21  31  31  10  11  21  21
  5:  21  21  31  31  11  10  21  21
  6:  31  31  21  21  21  21  10  11
  7:  31  31  21  21  21  21  11  10

```

From /proc/meminfo

```

MemTotal:      1583913248 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/\*release\* /etc/\*version\*

SuSE-release:

```

SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2

```

```

# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.

```

os-release:

```

NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

uname -a:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate®2017\_fp\_base = 298

SPECrate®2017\_fp\_peak = 302

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2019  
**Hardware Availability:** Aug-2017  
**Software Availability:** Oct-2018

### Platform Notes (Continued)

```
Linux linux-9r4j 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB
```

```
run-level 3 Dec 25 08:59
```

SPEC is set to: /home/cpu2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal        xfs   930G   80G  851G   9% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C480M5.3.1.3e.0.0613181101 06/13/2018

Memory:

48x 0xCE00 M393A4K40BB2-CTD 32 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

### Compiler Version Notes

```
=====  
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)  
 | 544.nab_r(base, peak)  
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)  
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----
```

```
=====  
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)  
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate®2017\_fp\_base = 298

SPECrate®2017\_fp\_peak = 302

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2019

**Hardware Availability:** Aug-2017

**Software Availability:** Oct-2018

### Compiler Version Notes (Continued)

```
-----
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                  | 554.roms_r(base, peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.0.117 Build 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate®2017\_fp\_base = 298

SPECrate®2017\_fp\_peak = 302

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2019

**Hardware Availability:** Aug-2017

**Software Availability:** Oct-2018

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
```

```
507.cactuBSSN_r: -DSPEC_LP64
```

```
508.namd_r: -DSPEC_LP64
```

```
510.parest_r: -DSPEC_LP64
```

```
511.povray_r: -DSPEC_LP64
```

```
519.lbm_r: -DSPEC_LP64
```

```
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
```

```
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
```

```
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
```

```
538.imagick_r: -DSPEC_LP64
```

```
544.nab_r: -DSPEC_LP64
```

```
549.fotonik3d_r: -DSPEC_LP64
```

```
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate®2017\_fp\_base = 298

SPECrate®2017\_fp\_peak = 302

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2019

**Hardware Availability:** Aug-2017

**Software Availability:** Oct-2018

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

`-ffinite-math-only -qopt-mem-layout-trans=3`

Fortran benchmarks:

`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -auto  
-nostandard-realloc-lhs -align array32byte`

Benchmarks using both Fortran and C:

`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -auto  
-nostandard-realloc-lhs -align array32byte`

Benchmarks using both C and C++:

`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3`

Benchmarks using Fortran, C, and C++:

`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -auto  
-nostandard-realloc-lhs -align array32byte`

## Peak Compiler Invocation

C benchmarks:

`icc -m64 -std=c11`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:

`icpc -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:

`icpc -m64 icc -m64 -std=c11 ifort -m64`



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 5120, 2.20 GHz)

SPECrate®2017\_fp\_base = 298

SPECrate®2017\_fp\_peak = 302

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2019

**Hardware Availability:** Aug-2017

**Software Availability:** Oct-2018

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-03 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX512 -ipo -03 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
```

544.nab\_r: Same as 538.imagick\_r

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-03 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

```
510.parest_r: -xCORE-AVX512 -ipo -03 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX512 -ipo -03 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -auto
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-03 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -03
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
-align array32byte
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C480 M5 (Intel Xeon Gold 5120,  
2.20 GHz)

SPECrate®2017\_fp\_base = 298

SPECrate®2017\_fp\_peak = 302

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2019

**Hardware Availability:** Aug-2017

**Software Availability:** Oct-2018

## Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

```
526.blender_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -auto  
-nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-02-03 05:58:12-0500.

Report generated on 2020-07-01 13:41:57 by CPU2017 PDF formatter v6255.

Originally published on 2019-02-19.