



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 324

Inspur NF8260M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 328

CPU2017 License: 3358


Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: May-2019

Hardware Availability: Oct-2017

Software Availability: May-2018

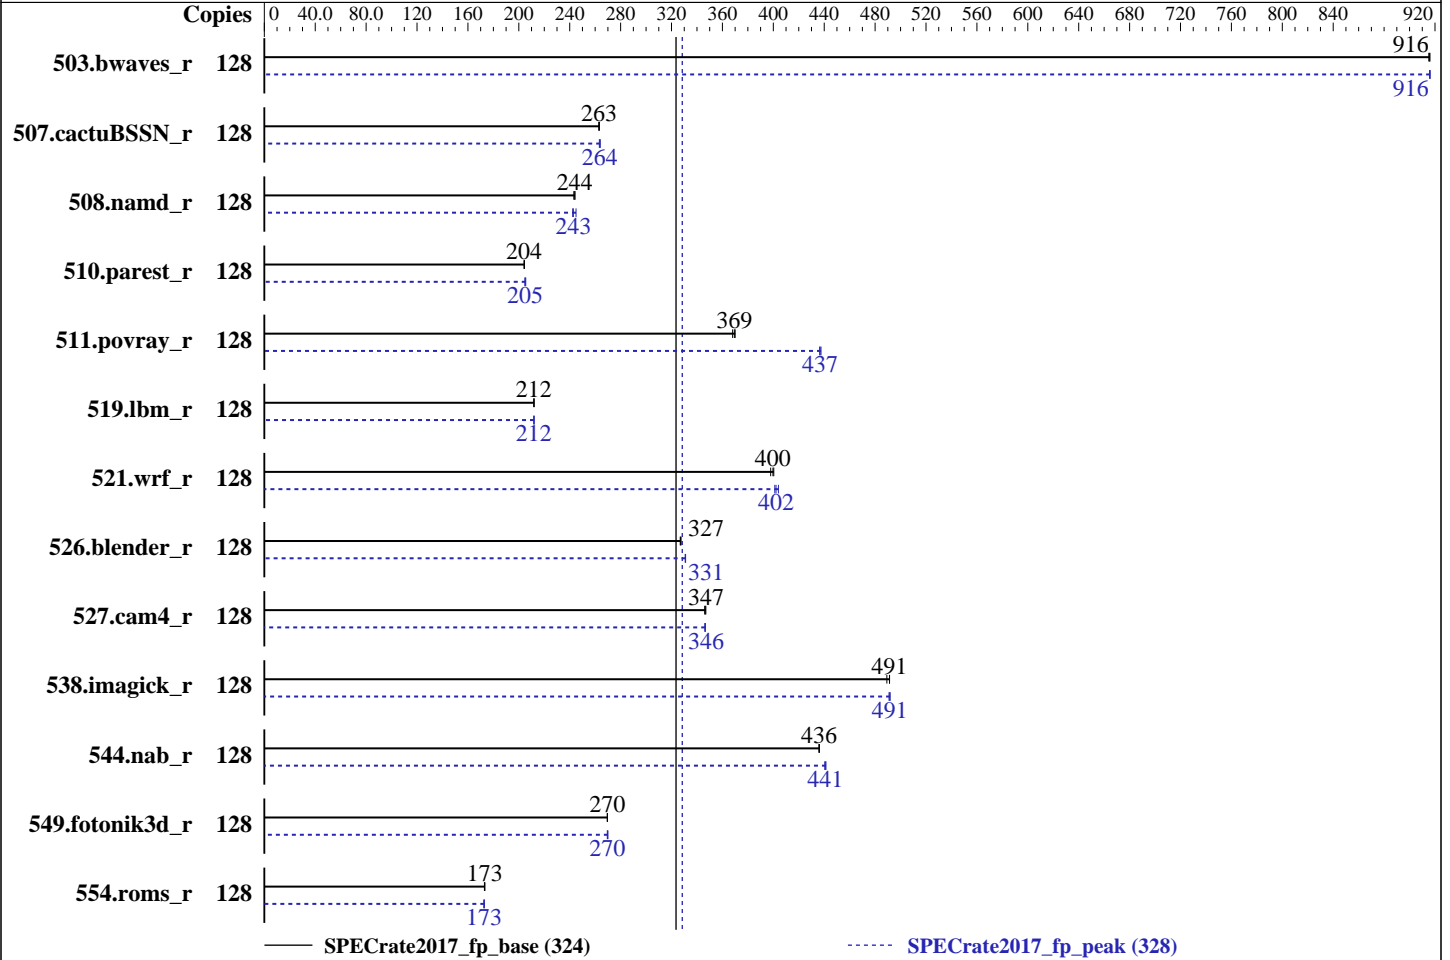

Hardware

CPU Name: Intel Xeon Gold 6130
 Max MHz.: 3700
 Nominal: 2100
 Enabled: 64 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 22 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 200 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2
 4.4.120-92.70-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Version 3.0.02 released Jul-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 324

Inspur NF8260M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 328

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: May-2019
Hardware Availability: Oct-2017
Software Availability: May-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	1403	915	1401	916	<u>1402</u>	<u>916</u>	128	1402	916	<u>1401</u>	<u>916</u>	1401	916
507.cactuBSSN_r	128	617	263	<u>616</u>	<u>263</u>	615	263	128	614	264	615	263	<u>614</u>	<u>264</u>
508.namd_r	128	500	243	498	244	<u>498</u>	<u>244</u>	128	502	242	496	245	<u>501</u>	<u>243</u>
510.parest_r	128	1638	204	<u>1640</u>	<u>204</u>	1640	204	128	<u>1634</u>	<u>205</u>	1635	205	1630	205
511.povray_r	128	812	368	<u>809</u>	<u>369</u>	808	370	128	<u>684</u>	<u>437</u>	683	437	685	436
519.lbm_r	128	<u>637</u>	<u>212</u>	637	212	637	212	128	637	212	<u>637</u>	<u>212</u>	636	212
521.wrf_r	128	721	398	716	400	<u>717</u>	<u>400</u>	128	710	404	<u>713</u>	<u>402</u>	715	401
526.blender_r	128	<u>596</u>	<u>327</u>	595	327	596	327	128	589	331	589	331	<u>589</u>	<u>331</u>
527.cam4_r	128	645	347	<u>646</u>	<u>347</u>	647	346	128	646	346	<u>646</u>	<u>346</u>	646	346
538.imagick_r	128	651	489	648	491	<u>648</u>	<u>491</u>	128	648	491	647	492	<u>648</u>	<u>491</u>
544.nab_r	128	<u>494</u>	<u>436</u>	494	436	494	436	128	<u>489</u>	<u>441</u>	489	440	488	441
549.fotonik3d_r	128	<u>1851</u>	<u>270</u>	1851	270	1850	270	128	1851	270	<u>1849</u>	<u>270</u>	1848	270
554.roms_r	128	1176	173	1174	173	<u>1174</u>	<u>173</u>	128	<u>1178</u>	<u>173</u>	1179	173	1176	173

SPECrate2017_fp_base = 324

SPECrate2017_fp_peak = 328

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/CPU2017/lib/ia32:/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-32:/home/CPU2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 324

Inspur NF8260M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 328

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: May-2019

Hardware Availability: Oct-2017

Software Availability: May-2018

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS and OS configuration:

SCALING_GOVERNOR set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

CLE Support set to Disable

IMC (Integrated memory controller) Interleaving set to 1-way

Sub NUMA Cluster (SNC) set to Enable

Sysinfo program /home/CPU2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-2uqb Thu May 2 04:12:28 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz

4 "physical id"s (chips)

128 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 16

siblings : 32

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 128

On-line CPU(s) list: 0-127

Thread(s) per core: 2

Core(s) per socket: 16

Socket(s): 4

NUMA node(s): 8

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 324

Inspur NF8260M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 328

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: May-2019
Hardware Availability: Oct-2017
Software Availability: May-2018

Platform Notes (Continued)

```

Vendor ID:           GenuineIntel
CPU family:         6
Model:              85
Model name:         Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
Stepping:           4
CPU MHz:            1499.998
CPU max MHz:        3700.0000
CPU min MHz:        1000.0000
BogoMIPS:           4200.03
Virtualization:     VT-x
L1d cache:          32K
L1i cache:          32K
L2 cache:           1024K
L3 cache:           22528K
NUMA node0 CPU(s): 0-3,8-11,64-67,72-75
NUMA node1 CPU(s): 4-7,12-15,68-71,76-79
NUMA node2 CPU(s): 16-19,24-27,80-83,88-91
NUMA node3 CPU(s): 20-23,28-31,84-87,92-95
NUMA node4 CPU(s): 32-35,40-43,96-99,104-107
NUMA node5 CPU(s): 36-39,44-47,100-103,108-111
NUMA node6 CPU(s): 48-51,56-59,112-115,120-123
NUMA node7 CPU(s): 52-55,60-63,116-119,124-127
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm
hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl stibp retpoline
kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep
bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb
avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 22528 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 8 9 10 11 64 65 66 67 72 73 74 75
node 0 size: 192024 MB
node 0 free: 181866 MB
node 1 cpus: 4 5 6 7 12 13 14 15 68 69 70 71 76 77 78 79
node 1 size: 193528 MB
node 1 free: 186906 MB
node 2 cpus: 16 17 18 19 24 25 26 27 80 81 82 83 88 89 90 91
node 2 size: 193528 MB

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 324

Inspur NF8260M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 328

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: May-2019

Hardware Availability: Oct-2017

Software Availability: May-2018

Platform Notes (Continued)

```

node 2 free: 186970 MB
node 3 cpus: 20 21 22 23 28 29 30 31 84 85 86 87 92 93 94 95
node 3 size: 193528 MB
node 3 free: 186981 MB
node 4 cpus: 32 33 34 35 40 41 42 43 96 97 98 99 104 105 106 107
node 4 size: 193528 MB
node 4 free: 186949 MB
node 5 cpus: 36 37 38 39 44 45 46 47 100 101 102 103 108 109 110 111
node 5 size: 193528 MB
node 5 free: 186955 MB
node 6 cpus: 48 49 50 51 56 57 58 59 112 113 114 115 120 121 122 123
node 6 size: 193528 MB
node 6 free: 186923 MB
node 7 cpus: 52 53 54 55 60 61 62 63 116 117 118 119 124 125 126 127
node 7 size: 193378 MB
node 7 free: 186781 MB
node distances:
node   0   1   2   3   4   5   6   7
  0:  10  11  31  31  21  21  21  21
  1:  11  10  31  31  21  21  21  21
  2:  31  31  10  11  21  21  21  21
  3:  31  31  11  10  21  21  21  21
  4:  21  21  21  21  10  11  31  31
  5:  21  21  21  21  11  10  31  31
  6:  21  21  21  21  31  31  10  11
  7:  21  21  21  21  31  31  11  10

```

```

From /proc/meminfo
MemTotal:      1583691704 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 324

Inspur NF8260M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 328

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: May-2019
Hardware Availability: Oct-2017
Software Availability: May-2018

Platform Notes (Continued)

```
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-2uqb 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB
```

```
run-level 3 May 1 17:54 last=5
```

```
SPEC is set to: /home/CPU2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   182G   67G  115G   37% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Inspur 3.0.02 07/08/2018
Memory:
48x Samsung M393A4K40CB2-CTD 32 GB 2 rank 2666
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)  
-----
```

```
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CC 519.lbm_r(peak) 544.nab_r(peak)  
-----
```

```
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 324

Inspur NF8260M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 328

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: May-2019
Hardware Availability: Oct-2017
Software Availability: May-2018

Compiler Version Notes (Continued)

=====
CXXC 508.namd_r(base) 510.parest_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(peak) 510.parest_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(peak) 526.blender_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(peak)

icpc (ICC) 18.0.0 20170811

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 324

Inspur NF8260M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 328

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: May-2019
Hardware Availability: Oct-2017
Software Availability: May-2018

Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)
=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 554.roms_r(peak)
=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(base) 527.cam4_r(base)
=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(peak) 527.cam4_r(peak)
=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 324

Inspur NF8260M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 328

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: May-2019

Hardware Availability: Oct-2017

Software Availability: May-2018

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

507.cactuBSSN_r: -DSPEC_LP64

508.namd_r: -DSPEC_LP64

510.parest_r: -DSPEC_LP64

511.povray_r: -DSPEC_LP64

519.lbm_r: -DSPEC_LP64

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 324

Inspur NF8260M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 328

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: May-2019

Hardware Availability: Oct-2017

Software Availability: May-2018

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both C and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

Peak Compiler Invocation

C benchmarks:

icc

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 324

Inspur NF8260M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 328

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: May-2019

Hardware Availability: Oct-2017

Software Availability: May-2018

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 519.lbm_r

C++ benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 324

Inspur NF8260M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 328

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: May-2019

Hardware Availability: Oct-2017

Software Availability: May-2018

Peak Optimization Flags (Continued)

503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Inspur Corporation

SPECrate2017_fp_base = 324

Inspur NF8260M5 (Intel Xeon Gold 6130)

SPECrate2017_fp_peak = 328

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: May-2019

Hardware Availability: Oct-2017

Software Availability: May-2018

Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.1-SKL.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.1-SKL.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-05-02 04:12:27-0400.

Report generated on 2019-06-25 18:52:22 by CPU2017 PDF formatter v6067.

Originally published on 2019-06-25.