



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro


A+ Server 1014S-WTRT
(H12SSW-NT , AMD EPYC 7402)

SPECrate®2017_int_base = 174

SPECrate®2017_int_peak = 185

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

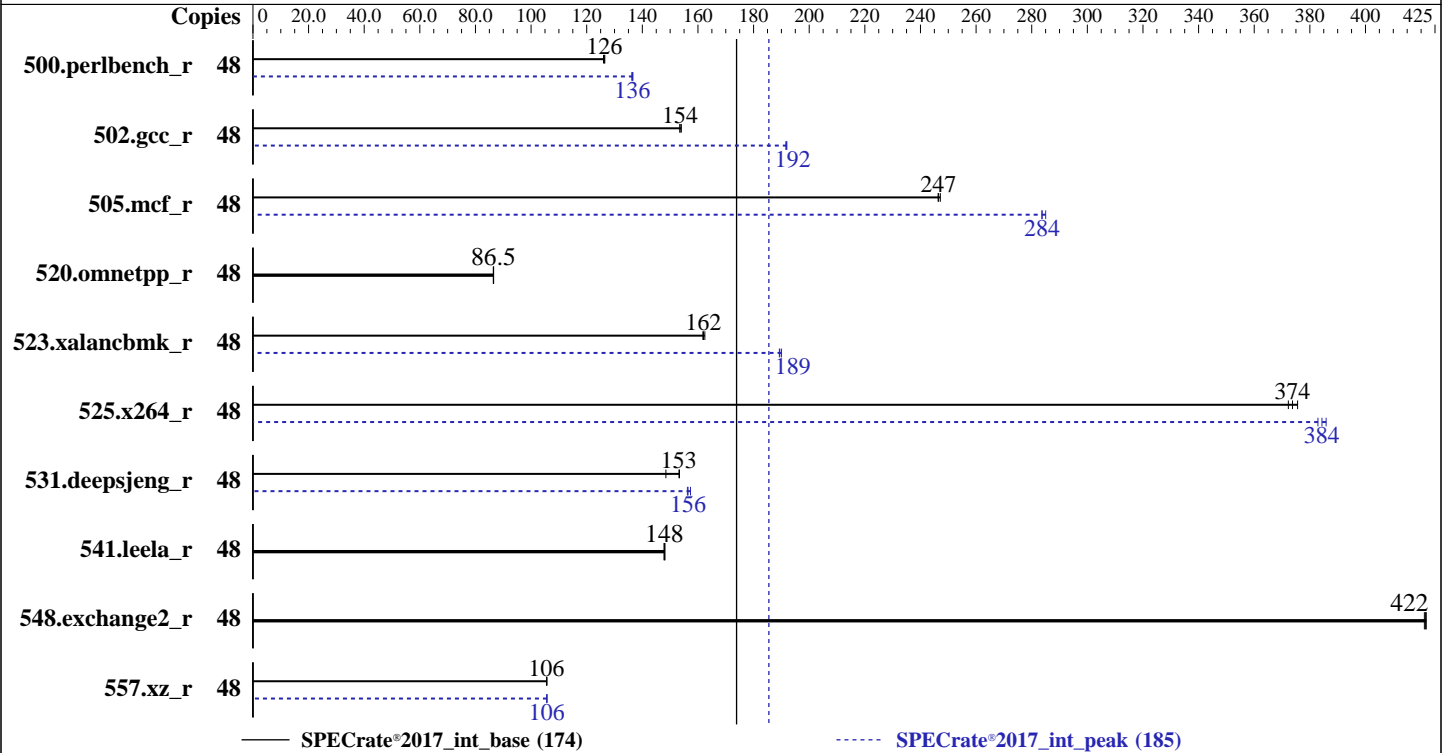

Hardware

CPU Name: AMD EPYC 7402
 Max MHz: 3350
 Nominal: 2800
 Enabled: 24 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 128 MB I+D on chip per chip, 16 MB shared / 3 cores
 Other: None
 Memory: 512 GB (8 x 64 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 4 TB NVMe SSD
 Other: None

Software

OS: Ubuntu 19.04
 kernel 5.0.0-25-generic
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: No
 Firmware: Version 1.0 released Jul-2019
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library v5.2.0
 Power Management: --



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1014S-WTRT
(H12SSW-NT , AMD EPYC 7402)

SPECrate®2017_int_base = 174

SPECrate®2017_int_peak = 185

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	604	127	606	126	605	126	48	560	136	559	137	561	136
502.gcc_r	48	443	153	441	154	443	154	48	354	192	355	192	354	192
505.mcf_r	48	315	246	314	247	315	247	48	272	285	273	284	273	284
520.omnetpp_r	48	728	86.5	728	86.5	729	86.4	48	728	86.5	728	86.5	729	86.4
523.xalancbmk_r	48	312	162	313	162	313	162	48	267	190	268	189	268	189
525.x264_r	48	224	376	226	372	225	374	48	219	384	219	383	218	386
531.deepsjeng_r	48	359	153	359	153	371	148	48	350	157	352	156	352	156
541.leela_r	48	537	148	537	148	538	148	48	537	148	537	148	538	148
548.exchange2_r	48	299	421	298	422	298	422	48	299	421	298	422	298	422
557.xz_r	48	491	106	491	106	490	106	48	491	106	491	106	490	106

SPECrate®2017_int_base = **174**

SPECrate®2017_int_peak = **185**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1014S-WTRT
(H12SSW-NT, AMD EPYC 7402)

SPECrate®2017_int_base = 174

SPECrate®2017_int_peak = 185

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/root/20190805/amd_rate_aocc200_rome_B_lib/64:/root/20190805/amd_rate_aocc200_rome_B_lib/32:"
MALLOC_CONF = "retain:true"

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

Platform Notes

BIOS Settings:
Determinism Control = Manual
Determinism Slider = Power
APBDIS = 1
NUMA Nodes Per Socket = NPS4
Sysinfo program /root/20190805/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on bravo1 Sat Aug 31 11:35:13 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : AMD EPYC 7402 24-Core Processor
1 "physical id"s (chips)
48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1014S-WTRT
(H12SSW-NT , AMD EPYC 7402)

SPECrate®2017_int_base = 174

SPECrate®2017_int_peak = 185

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Platform Notes (Continued)

```

Byte Order:                Little Endian
Address sizes:             43 bits physical, 48 bits virtual
CPU(s):                   48
On-line CPU(s) list:     0-47
Thread(s) per core:      2
Core(s) per socket:      24
Socket(s):                1
NUMA node(s):            4
Vendor ID:                AuthenticAMD
CPU family:               23
Model:                   49
Model name:               AMD EPYC 7402 24-Core Processor
Stepping:                 0
CPU MHz:                  3349.648
CPU max MHz:              2800.0000
CPU min MHz:              1500.0000
BogoMIPS:                 5600.25
Virtualization:          AMD-V
L1d cache:                32K
L1i cache:                32K
L2 cache:                 512K
L3 cache:                 16384K
NUMA node0 CPU(s):       0-5,24-29
NUMA node1 CPU(s):       6-11,30-35
NUMA node2 CPU(s):       12-17,36-41
NUMA node3 CPU(s):       18-23,42-47
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bml avx2
smep bmi2 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveopt
xsavec xsaveprtr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid
overflow_recov succor smca

```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 24 25 26 27 28 29
node 0 size: 128889 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1014S-WTRT
(H12SSW-NT , AMD EPYC 7402)

SPECrate®2017_int_base = 174

SPECrate®2017_int_peak = 185

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Platform Notes (Continued)

```

node 0 free: 128016 MB
node 1 cpus: 6 7 8 9 10 11 30 31 32 33 34 35
node 1 size: 129011 MB
node 1 free: 128298 MB
node 2 cpus: 12 13 14 15 16 17 36 37 38 39 40 41
node 2 size: 129011 MB
node 2 free: 128446 MB
node 3 cpus: 18 19 20 21 22 23 42 43 44 45 46 47
node 3 size: 128973 MB
node 3 free: 128402 MB
node distances:
node  0  1  2  3
  0:  10  12  12  12
  1:  12  10  12  12
  2:  12  12  10  12
  3:  12  12  12  10

```

```

From /proc/meminfo
MemTotal:      528266904 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Ubuntu 19.04

```

```

From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
  NAME="Ubuntu"
  VERSION="19.04 (Disco Dingo)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 19.04"
  VERSION_ID="19.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"

```

```

uname -a:
Linux bravol 5.0.0-25-generic #26-Ubuntu SMP Thu Aug 1 12:04:58 UTC 2019 x86_64 x86_64
x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2017-5754 (Meltdown):      Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swaps barriers and __user
pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional,

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1014S-WTRT
(H12SSW-NT, AMD EPYC 7402)

SPECrate®2017_int_base = 174

SPECrate®2017_int_peak = 185

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Platform Notes (Continued)

IBRS_FW, STIBP: conditional, RSB filling

run-level 5 Aug 31 11:30

SPEC is set to: /root/20190805

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p2	ext4	3.5T	14G	3.3T	1%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.0 07/19/2019

Memory:

8x Micron Technology 36ASF8G72PZ-3G2BV 64 kB 2 rank 3200

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 502.gcc_r(peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C | 502.gcc_r(peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1014S-WTRT
(H12SSW-NT, AMD EPYC 7402)

SPECrate®2017_int_base = 174

SPECrate®2017_int_peak = 185

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Compiler Version Notes (Continued)

Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)
=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++ | 523.xalanbmk_r(peak)
=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalanbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++ | 523.xalanbmk_r(peak)
=====

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1014S-WTRT
(H12SSW-NT, AMD EPYC 7402)

SPECrate®2017_int_base = 174

SPECrate®2017_int_peak = 185

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Compiler Version Notes (Continued)

```
=====  
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)  
         | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)  
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
=====
```

```
=====  
Fortran  | 548.exchange2_r(base, peak)  
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
=====
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64  
502.gcc_r: -DSPEC_LP64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1014S-WTRT
(H12SSW-NT, AMD EPYC 7402)

SPECrate®2017_int_base = 174

SPECrate®2017_int_peak = 185

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Base Portability Flags (Continued)

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1014S-WTRT
(H12SSW-NT , AMD EPYC 7402)

SPECrate®2017_int_base = 174

SPECrate®2017_int_peak = 185

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Peak Compiler Invocation (Continued)

Fortran benchmarks:
flang

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1014S-WTRT
(H12SSW-NT, AMD EPYC 7402)

SPECrate®2017_int_base = 174

SPECrate®2017_int_peak = 185

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Peak Optimization Flags (Continued)

502.gcc_r (continued):

```
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -fgnu89-inline -ljemalloc
```

505.mcf_r: -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

525.x264_r: Same as 500.perlbench_r

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -ljemalloc
```

531.deepsjeng_r: -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Supermicro

A+ Server 1014S-WTRT
(H12SSW-NT, AMD EPYC 7402)

SPECrate®2017_int_base = 174

SPECrate®2017_int_peak = 185

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Peak Optimization Flags (Continued)

531.deepsjeng_r (continued):

```
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast  
-march=znver2 -flv-function-specialization  
-mllvm -unroll-threshold=100  
-mllvm -enable-partial-unswitch  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -vector-library=LIBMVEC  
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc  
-lflang
```

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks:

502.gcc_r: -L/sppo/dev/cpu2017/amd_rate_aocc200_rome/amd_rate_aocc200_rome_B_lib/32

C++ benchmarks:

523.xalancbmk_r: -L/sppo/dev/cpu2017/amd_rate_aocc200_rome/amd_rate_aocc200_rome_B_lib/32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Rome-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Rome-revA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-08-31 14:35:13-0400.

Report generated on 2019-09-17 16:13:41 by CPU2017 PDF formatter v6255.

Originally published on 2019-09-17.