



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 5215, 2.50GHz

SPECrate®2017_int_base = 232

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

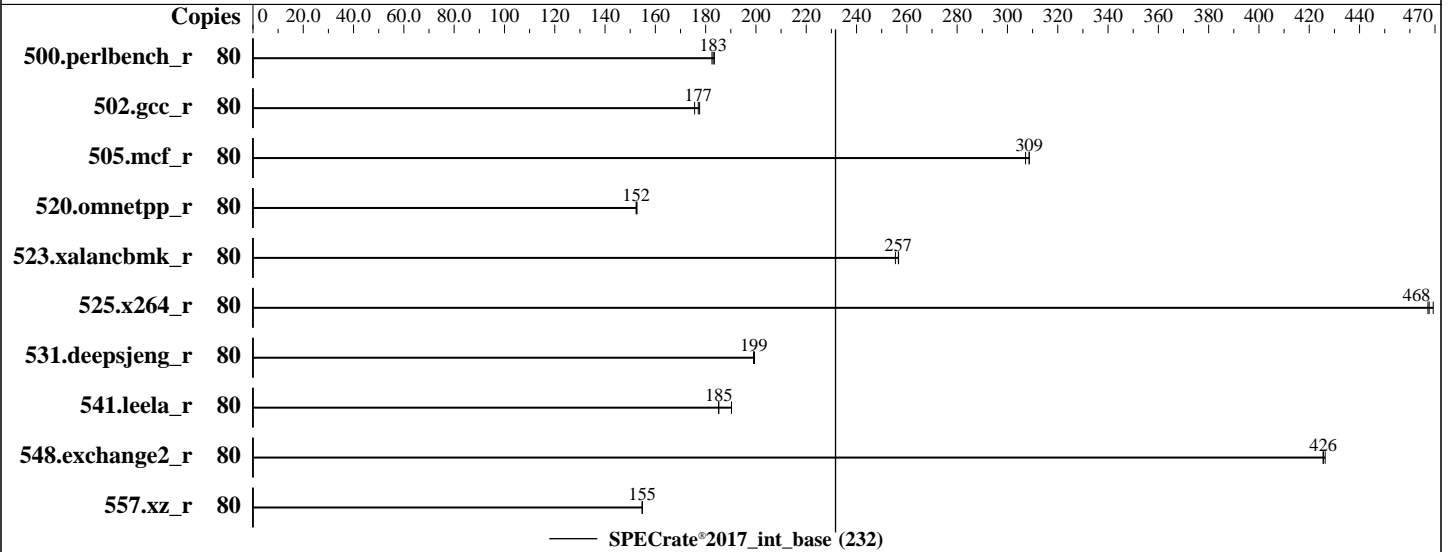

Hardware

CPU Name: Intel Xeon Gold 5215
 Max MHz: 3400
 Nominal: 2500
 Enabled: 40 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 13.75 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)
 Storage: 1 x SATA M.2 SSD, 480 GB
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 4.12.14-25.28-default
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Fujitsu BIOS for D3753-C1x Version V5.0.0.14 R1.8.0 released Jun-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: --



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 5215, 2.50GHz

SPECrate®2017_int_base = 232

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jul-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	80	698	183	<u>696</u>	<u>183</u>	694	183							
502.gcc_r	80	638	178	<u>640</u>	<u>177</u>	645	176							
505.mcf_r	80	<u>419</u>	<u>309</u>	419	309	421	307							
520.omnetpp_r	80	<u>688</u>	<u>152</u>	689	152	687	153							
523.xalancbmk_r	80	<u>329</u>	<u>257</u>	329	257	331	255							
525.x264_r	80	<u>300</u>	<u>468</u>	300	467	298	469							
531.deepsjeng_r	80	<u>460</u>	<u>199</u>	461	199	460	199							
541.leela_r	80	716	185	696	190	<u>715</u>	<u>185</u>							
548.exchange2_r	80	493	426	<u>493</u>	<u>426</u>	492	426							
557.xz_r	80	<u>558</u>	<u>155</u>	558	155	558	155							

SPECrate®2017_int_base = 232

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-79
Process tuning settings:
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-int/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 5215, 2.50GHz

SPECrate®2017_int_base = 232

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jul-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

```
BIOS configuration:
DCU Streamer Prefetcher = Disabled
Fan Control = Full
Energy Performance = Performance
HWPM = Native Mode with no legacy
LLC Prefetcher = Disable
Override OS Energy Performance = Enable
Patrol Scrub = Disabled
Sub Numa Clustering = Disabled
WR CRC feature Control = Disabled
XPT Prefetch = Enable
Sysinfo program /home/Benchmark/speccpu2017-int/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on SLES15-BMT Mon Jul 15 07:21:10 2019
```

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 5215 CPU @ 2.50GHz
 4 "physical id"s (chips)
 80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 10
siblings : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
physical 2: cores 0 1 2 3 4 8 9 10 11 12
physical 3: cores 0 1 2 3 4 8 9 10 11 12
```

```
From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 80
On-line CPU(s) list: 0-79
Thread(s) per core: 2
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 5215, 2.50GHz

SPECrate®2017_int_base = 232

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jul-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Platform Notes (Continued)

```

Core(s) per socket: 10
Socket(s): 4
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 5215 CPU @ 2.50GHz
Stepping: 6
CPU MHz: 2500.000
CPU max MHz: 3400.0000
CPU min MHz: 1000.0000
BogoMIPS: 5000.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 14080K
NUMA node0 CPU(s): 0-9,40-49
NUMA node1 CPU(s): 10-19,50-59
NUMA node2 CPU(s): 20-29,60-69
NUMA node3 CPU(s): 30-39,70-79
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bml hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni flush_lld arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 14080 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 40 41 42 43 44 45 46 47 48 49
node 0 size: 386363 MB
node 0 free: 380214 MB
node 1 cpus: 10 11 12 13 14 15 16 17 18 19 50 51 52 53 54 55 56 57 58 59
node 1 size: 387067 MB
node 1 free: 386738 MB
node 2 cpus: 20 21 22 23 24 25 26 27 28 29 60 61 62 63 64 65 66 67 68 69

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 5215, 2.50GHz

SPECrate®2017_int_base = 232

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jul-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Platform Notes (Continued)

```

node 2 size: 387038 MB
node 2 free: 386747 MB
node 3 cpus: 30 31 32 33 34 35 36 37 38 39 70 71 72 73 74 75 76 77 78 79
node 3 size: 386895 MB
node 3 free: 385906 MB
node distances:
node 0 1 2 3
0: 10 21 31 21
1: 21 10 21 31
2: 31 21 10 21
3: 21 31 21 10

```

```

From /proc/meminfo
MemTotal:      1584502044 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"

```

```

uname -a:
Linux SLES15-BMT 4.12.14-25.28-default #1 SMP Wed Jan 16 20:00:47 UTC 2019 (dd6077c)
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2017-5754 (Meltdown):      Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB
filling

```

run-level 3 Jul 15 07:18

```

SPEC is set to: /home/Benchmark/speccpu2017-int
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda5        xfs   343G   30G  314G   9% /home

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 5215,
2.50GHz

SPECrate®2017_int_base = 232

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jul-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Platform Notes (Continued)

hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.14 R1.8.0 for D3753-Clx
06/06/2019

Memory:

48x Micron 36ASF4G72PZ-2G9E2 32 GB 2 rank 2933, configured at 2666

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)  
      | 525.x264_r(base) 557.xz_r(base)  
-----
```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

```
=====  
C++    | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)  
      | 541.leela_r(base)  
-----
```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

```
=====  
Fortran | 548.exchange2_r(base)  
-----
```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 5215,
2.50GHz

SPECrate®2017_int_base = 232

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Jul-2019
Hardware Availability: Apr-2019
Software Availability: Feb-2019

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

C++ benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

Fortran benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64
-lqkmalloc

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.html>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M5, Intel Xeon Gold 5215,
2.50GHz

SPECrate®2017_int_base = 232

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Jul-2019

Hardware Availability: Apr-2019

Software Availability: Feb-2019

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-CSL-RevE.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-07-14 18:21:09-0400.

Report generated on 2019-10-01 14:31:34 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.