



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10


(2.20 GHz, Intel Xeon Gold 5220)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Sep-2019
Hardware Availability: Apr-2019
Software Availability: Aug-2019

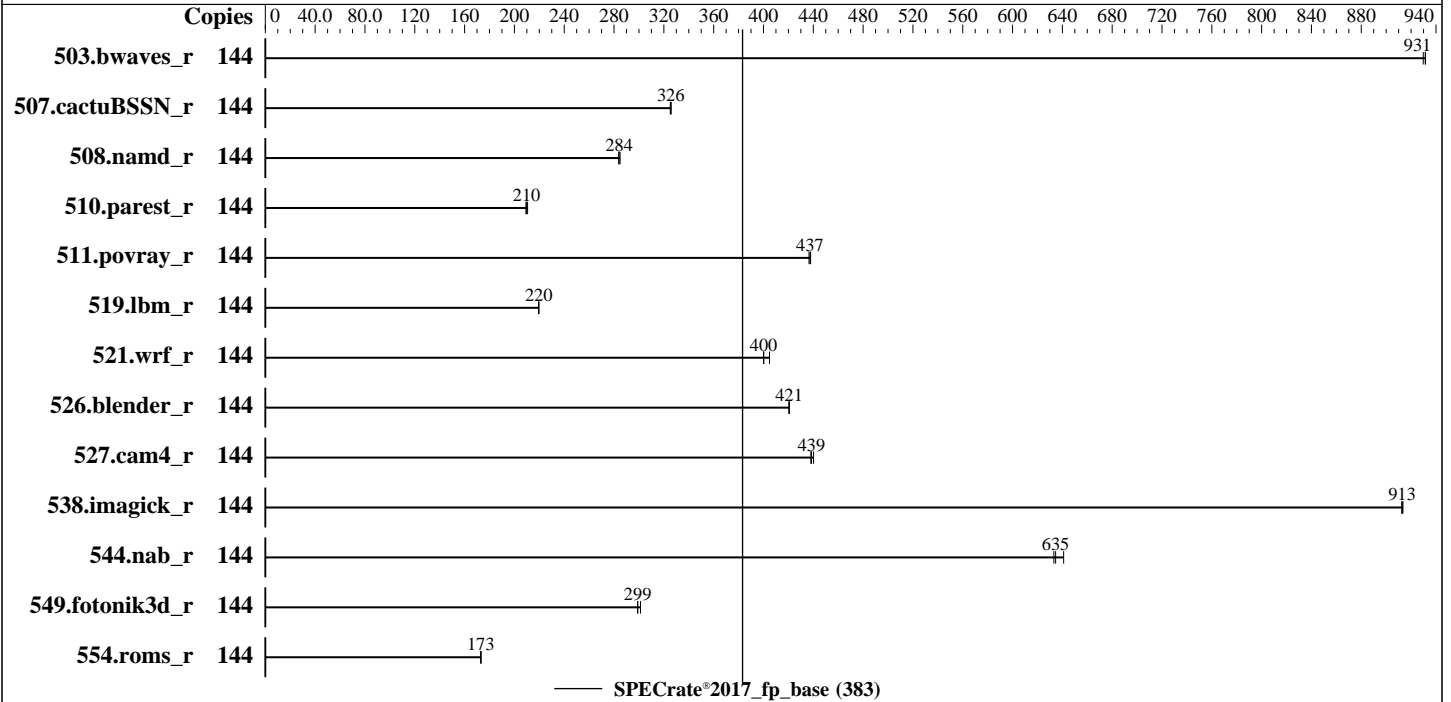

Hardware

CPU Name: Intel Xeon Gold 5220
 Max MHz: 3900
 Nominal: 2200
 Enabled: 72 cores, 4 chips, 2 threads/core
 Orderable: 1, 2, 4 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)
 Storage: 1 x 480 GB SAS SSD, RAID 0
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 (x86_64)
 Kernel 4.12.14-23-default
 Compiler: C/C++: Version 19.0.2.187 of Intel C/C++ Compiler Build 20190117 for Linux;
 Fortran: Version 19.0.2.187 of Intel Fortran Compiler Build 20190117 for Linux
 Parallel: No
 Firmware: HPE BIOS Version U34 02/02/2019 released Apr-2019
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: --



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.20 GHz, Intel Xeon Gold 5220)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Sep-2019
Hardware Availability: Apr-2019
Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	144	1553	930	1550	932	1550	931							
507.cactuBSSN_r	144	561	325	560	326	559	326							
508.namd_r	144	482	284	482	284	480	285							
510.parest_r	144	1795	210	1800	209	1789	211							
511.povray_r	144	769	437	770	437	768	438							
519.lbm_r	144	691	220	692	219	691	220							
521.wrf_r	144	806	400	806	400	797	405							
526.blender_r	144	522	420	521	421	521	421							
527.cam4_r	144	574	439	572	440	575	438							
538.imagick_r	144	392	913	392	913	392	912							
544.nab_r	144	382	635	383	633	378	641							
549.fotonik3d_r	144	1877	299	1877	299	1863	301							
554.roms_r	144	1323	173	1322	173	1322	173							

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/cpu2017/lib/ia32:/cpu2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.20 GHz, Intel Xeon Gold 5220)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Sep-2019
Hardware Availability: Apr-2019
Software Availability: Aug-2019

General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling
Memory Patrol Scrubbing set to Disabled
LLC Prefetch set to Enabled
LLC Dead Line Allocation set to Disabled
Enhanced Processor Performance set to Enabled
Workload Profile set to General Throughput Compute
Workload Profile set to Custom
Energy/Performance Bias set to Balanced Performance
Advanced Memory Protection set to Advanced ECC
Sub-NUMA Clustering set to Disabled
Sysinfo program /cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on consip Fri Sep 20 13:37:22 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5220 CPU @ 2.20GHz
 4 "physical id"s (chips)
 144 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 18
siblings : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.20 GHz, Intel Xeon Gold 5220)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Sep-2019
Hardware Availability: Apr-2019
Software Availability: Aug-2019

Platform Notes (Continued)

```

Byte Order:           Little Endian
CPU(s):               144
On-line CPU(s) list: 0-143
Thread(s) per core:  2
Core(s) per socket:  18
Socket(s):            4
NUMA node(s):         4
Vendor ID:            GenuineIntel
CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Gold 5220 CPU @ 2.20GHz
Stepping:             6
CPU MHz:              2200.000
BogoMIPS:             4400.00
Virtualization:       VT-x
L1d cache:            32K
L1i cache:            32K
L2 cache:             1024K
L3 cache:             25344K
NUMA node0 CPU(s):   0-17,72-89
NUMA node1 CPU(s):   18-35,90-107
NUMA node2 CPU(s):   36-53,108-125
NUMA node3 CPU(s):   54-71,126-143
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cdp_l3 invpcid_single intel_ppin mba tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
ibpb ibrs stibp dtherm ida arat pln pts pku ospke avx512_vnni arch_capabilities ssbd

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 72 73 74 75 76 77 78 79 80 81
82 83 84 85 86 87 88 89
node 0 size: 386549 MB
node 0 free: 377119 MB
node 1 cpus: 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 90 91 92 93 94 95 96
97 98 99 100 101 102 103 104 105 106 107

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.20 GHz, Intel Xeon Gold 5220)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Sep-2019
Hardware Availability: Apr-2019
Software Availability: Aug-2019

Platform Notes (Continued)

```

node 1 size: 387065 MB
node 1 free: 379728 MB
node 2 cpus: 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 108 109 110 111 112
113 114 115 116 117 118 119 120 121 122 123 124 125
node 2 size: 387065 MB
node 2 free: 379499 MB
node 3 cpus: 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 126 127 128 129 130
131 132 133 134 135 136 137 138 139 140 141 142 143
node 3 size: 386855 MB
node 3 free: 379402 MB
node distances:
node  0  1  2  3
  0:  10  21  21  21
  1:  21  10  21  21
  2:  21  21  10  21
  3:  21  21  21  10

```

```

From /proc/meminfo
MemTotal:      1584675760 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"

```

```

uname -a:
Linux consip 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b) x86_64
x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2017-5754 (Meltdown):      Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW

```

run-level 3 Sep 20 08:47

SPEC is set to: /cpu2017

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.20 GHz, Intel Xeon Gold 5220)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Sep-2019
Hardware Availability: Apr-2019
Software Availability: Aug-2019

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	btrfs	444G	119G	325G	27%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U34 02/02/2019

Memory:

48x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2933, configured at 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base) 510.parest_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.20 GHz, Intel Xeon Gold 5220)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Sep-2019
Hardware Availability: Apr-2019
Software Availability: Aug-2019

Compiler Version Notes (Continued)

```

Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
=====
Fortran          | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
=====
Fortran, C       | 521.wrf_r(base) 527.cam4_r(base)
-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.2.187 Build 20190117
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----

```

Base Compiler Invocation

```

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:
icpc -m64 icc -m64 -std=c11

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.20 GHz, Intel Xeon Gold 5220)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2019

Hardware Availability: Apr-2019

Software Availability: Aug-2019

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.20 GHz, Intel Xeon Gold 5220)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2019

Hardware Availability: Apr-2019

Software Availability: Aug-2019

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs  
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.html>

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-09-20 13:37:22-0400.

Report generated on 2019-10-15 14:42:06 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-15.