



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_fp\_base = 74.9

PowerEdge R7515 (AMD EPYC 7302P, 3.00GHz)

SPECspeed®2017\_fp\_peak = 76.8

CPU2017 License: 55


Test Date: Aug-2019

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

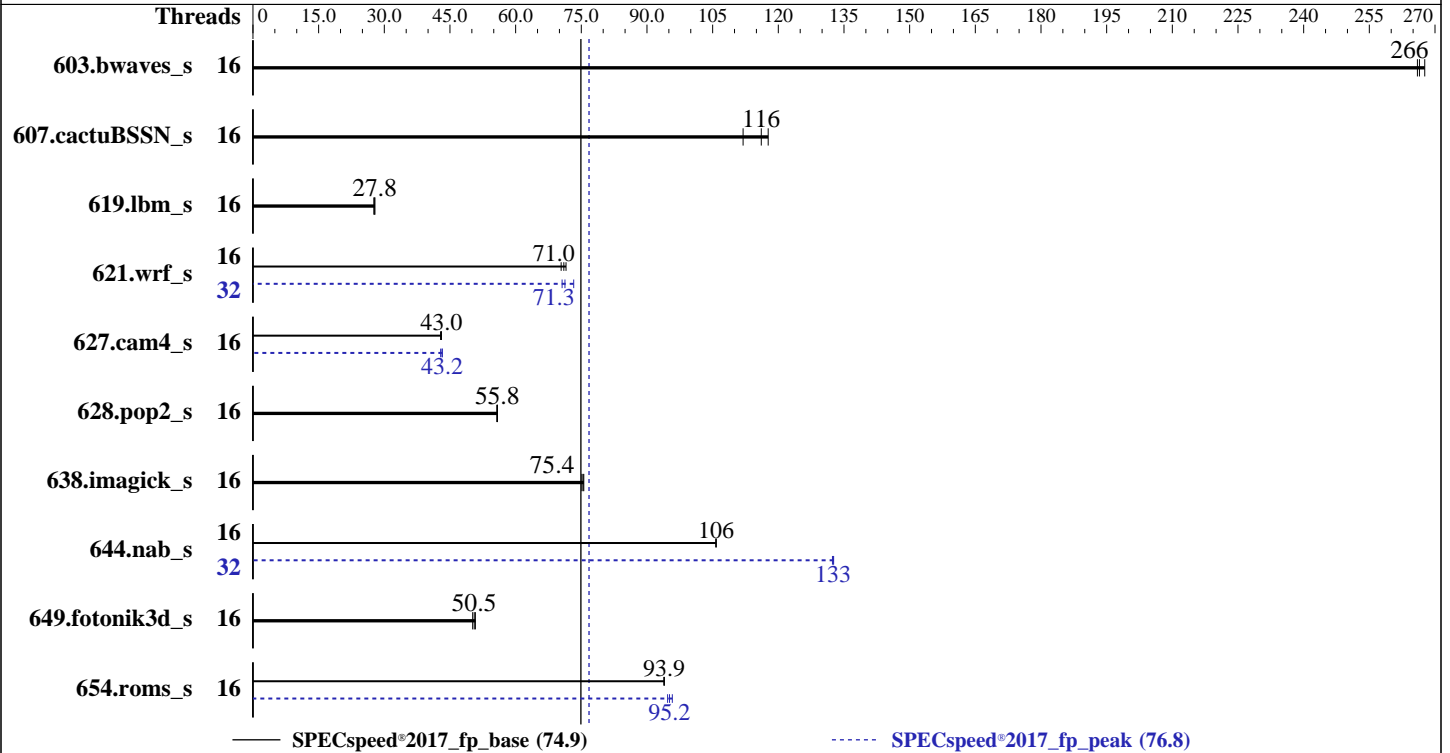

### Hardware

CPU Name: AMD EPYC 7302P  
 Max MHz: 3300  
 Nominal: 3000  
 Enabled: 16 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 128 MB I+D on chip per chip, 16 MB shared / 2 cores  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200Y-R, running at 3200)  
 Storage: 1 x 960 GB SAS SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1  
 kernel 4.12.14-195-default  
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 0.4.13 released Aug-2019  
 File System: xfs  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library version 5.2.0  
 Power Management: --



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 74.9

PowerEdge R7515 (AMD EPYC 7302P, 3.00GHz)

SPECSpeed®2017\_fp\_peak = 76.8

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Aug-2019  
Hardware Availability: Sep-2019  
Software Availability: Aug-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	16	220	268	<b><u>221</u></b>	<b><u>266</u></b>	222	266	16	220	268	<b><u>221</u></b>	<b><u>266</u></b>	222	266
607.cactuBSSN_s	16	142	118	149	112	<b><u>144</u></b>	<b><u>116</u></b>	16	142	118	149	112	<b><u>144</u></b>	<b><u>116</u></b>
619.lbm_s	16	188	27.8	<b><u>188</u></b>	<b><u>27.8</u></b>	190	27.6	16	188	27.8	<b><u>188</u></b>	<b><u>27.8</u></b>	190	27.6
621.wrf_s	16	185	71.5	<b><u>186</u></b>	<b><u>71.0</u></b>	188	70.4	32	<b><u>186</u></b>	<b><u>71.3</u></b>	181	73.3	187	70.6
627.cam4_s	16	207	42.9	206	43.0	<b><u>206</u></b>	<b><u>43.0</u></b>	16	207	42.9	205	43.3	<b><u>205</u></b>	<b><u>43.2</u></b>
628.pop2_s	16	213	55.9	<b><u>213</u></b>	<b><u>55.8</u></b>	213	55.7	16	213	55.9	<b><u>213</u></b>	<b><u>55.8</u></b>	213	55.7
638.imagick_s	16	192	75.1	<b><u>191</u></b>	<b><u>75.4</u></b>	191	75.6	16	192	75.1	<b><u>191</u></b>	<b><u>75.4</u></b>	191	75.6
644.nab_s	16	165	106	165	106	<b><u>165</u></b>	<b><u>106</u></b>	32	132	132	<b><u>132</u></b>	<b><u>133</u></b>	132	133
649.fotonik3d_s	16	179	50.8	182	50.2	<b><u>180</u></b>	<b><u>50.5</u></b>	16	179	50.8	182	50.2	<b><u>180</u></b>	<b><u>50.5</u></b>
654.roms_s	16	168	93.9	168	94.0	<b><u>168</u></b>	<b><u>93.9</u></b>	16	164	95.8	166	94.7	<b><u>165</u></b>	<b><u>95.2</u></b>

SPECSpeed®2017\_fp\_base = **74.9**

SPECSpeed®2017\_fp\_peak = **76.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 74.9

PowerEdge R7515 (AMD EPYC 7302P, 3.00GHz)

SPECspeed®2017\_fp\_peak = 76.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Operating System Notes (Continued)

Transparent huge pages set to 'always' for this run (OS default)

## General Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-31"

LD\_LIBRARY\_PATH = "/root/cpu2017-1.0.5/amd\_speed\_aocc200\_rome\_A\_lib/64:/root/cpu2017-1.0.5/amd\_speed\_aocc200\_rome\_A\_lib/32:"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "32"

Binaries were compiled on a system with 2p AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC 9.1.0 in Ubuntu 19.04

with flags: -O3 -march=znver2 -lto. jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

## Platform Notes

BIOS settings:

cTDP = Maximum

Determinism Slider set to Power

Fan Speed = Maximum

NPS4

Linear Enumeration

CCX as NUMA

Cstates enabled

Sysinfo program /root/cpu2017-1.0.5/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-g3ob Tue Aug 20 01:01:52 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7302P 16-Core Processor

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 74.9

PowerEdge R7515 (AMD EPYC 7302P, 3.00GHz)

SPECspeed®2017\_fp\_peak = 76.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Platform Notes (Continued)

1 "physical id"s (chips)  
32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 16
siblings  : 32
physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          43 bits physical, 48 bits virtual
CPU(s):                 32
On-line CPU(s) list:   0-31
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              1
NUMA node(s):          8
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  49
Model name:             AMD EPYC 7302P 16-Core Processor
Stepping:               0
CPU MHz:                2994.317
BogoMIPS:               5988.63
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              32K
L2 cache:               512K
L3 cache:               16384K
NUMA node0 CPU(s):     0,1,16,17
NUMA node1 CPU(s):     2,3,18,19
NUMA node2 CPU(s):     4,5,20,21
NUMA node3 CPU(s):     6,7,22,23
NUMA node4 CPU(s):     8,9,24,25
NUMA node5 CPU(s):     10,11,26,27
NUMA node6 CPU(s):     12,13,28,29
NUMA node7 CPU(s):     14,15,30,31
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
cat_l3 cdp_l3 hw_pstate sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep
bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 74.9

PowerEdge R7515 (AMD EPYC 7302P, 3.00GHz)

SPECSpeed®2017\_fp\_peak = 76.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Platform Notes (Continued)

cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local clzero irperf xsaveerptr arat npt lbrv svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold avic v\_vmsave\_vmload vgif umip rdpid overflow\_recov succor smca

/proc/cpuinfo cache data  
cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)  
node 0 cpus: 0 1 16 17  
node 0 size: 31820 MB  
node 0 free: 31397 MB  
node 1 cpus: 2 3 18 19  
node 1 size: 32254 MB  
node 1 free: 32069 MB  
node 2 cpus: 4 5 20 21  
node 2 size: 32255 MB  
node 2 free: 32140 MB  
node 3 cpus: 6 7 22 23  
node 3 size: 32254 MB  
node 3 free: 32151 MB  
node 4 cpus: 8 9 24 25  
node 4 size: 32255 MB  
node 4 free: 32107 MB  
node 5 cpus: 10 11 26 27  
node 5 size: 32225 MB  
node 5 free: 32005 MB  
node 6 cpus: 12 13 28 29  
node 6 size: 32255 MB  
node 6 free: 32102 MB  
node 7 cpus: 14 15 30 31  
node 7 size: 32242 MB  
node 7 free: 31845 MB

node distances:  
node 0 1 2 3 4 5 6 7  
0: 10 11 12 12 12 12 12 12  
1: 11 10 12 12 12 12 12 12  
2: 12 12 10 11 12 12 12 12  
3: 12 12 11 10 12 12 12 12  
4: 12 12 12 12 10 11 12 12  
5: 12 12 12 12 11 10 12 12  
6: 12 12 12 12 12 12 10 11  
7: 12 12 12 12 12 12 11 10

From /proc/meminfo  
MemTotal: 263743948 kB

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 74.9

PowerEdge R7515 (AMD EPYC 7302P, 3.00GHz)

SPECspeed®2017\_fp\_peak = 76.8

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Aug-2019  
Hardware Availability: Sep-2019  
Software Availability: Aug-2019

## Platform Notes (Continued)

HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*  
os-release:

```
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional,
IBRS_FW, STIBP: conditional, RSB filling
```

run-level 5 Aug 19 19:35

SPEC is set to: /root/cpu2017-1.0.5

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   440G   95G  346G  22% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 0.4.13 08/08/2019

Memory:

```
5x 80AD80B380AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200
1x 80AD863280AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200
2x 80AD869D80AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200
8x Not Specified Not Specified
```

(End of data from sysinfo program)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 74.9

PowerEdge R7515 (AMD EPYC 7302P, 3.00GHz)

SPECspeed®2017\_fp\_peak = 76.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Compiler Version Notes

```

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
  | 644.nab_s(base, peak)
=====

```

```

=====
AOCCLLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0.B179.2019_06_12) (based on LLVM AOCCLLVM.2.0.0.B179.2019_06_12)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin
=====

```

```

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

```

```

=====
AOCCLLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0.B179.2019_06_12) (based on LLVM AOCCLLVM.2.0.0.B179.2019_06_12)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin
AOCCLLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0.B179.2019_06_12) (based on LLVM AOCCLLVM.2.0.0.B179.2019_06_12)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin
AOCCLLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0.B179.2019_06_12) (based on LLVM AOCCLLVM.2.0.0.B179.2019_06_12)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin
=====

```

```

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
        | 654.roms_s(base, peak)
=====

```

```

=====
AOCCLLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0.B179.2019_06_12) (based on LLVM AOCCLLVM.2.0.0.B179.2019_06_12)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin
=====

```

```

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
           | 628.pop2_s(base, peak)
=====

```

```

=====
AOCCLLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
=====

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 74.9

PowerEdge R7515 (AMD EPYC 7302P, 3.00GHz)

SPECspeed®2017\_fp\_peak = 76.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

```

AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B179.2019_06_12 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#179) (based on LLVM AOCC.LLVM.2.0.0.B179.2019_06_12)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-2.0.0/bin
-----

```

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

```

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

```





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 74.9

PowerEdge R7515 (AMD EPYC 7302P, 3.00GHz)

SPECspeed®2017\_fp\_peak = 76.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieeee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieeee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -freemap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieeee -fno-finite-math-only
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 74.9

PowerEdge R7515 (AMD EPYC 7302P, 3.00GHz)

SPECspeed®2017\_fp\_peak = 76.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-DSPEC\_OPENMP -fopenmp -DUSE\_OPENMP -fopenmp=libomp -lomp -lpthread  
-ldl -lmvec -lamdlibm -ljemalloc -lflang

## Base Other Flags

C benchmarks:

-Wno-return-type

Fortran benchmarks:

-Wno-return-type

Benchmarks using both Fortran and C:

-Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-return-type

## Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 74.9

PowerEdge R7515 (AMD EPYC 7302P, 3.00GHz)

SPECspeed®2017\_fp\_peak = 76.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

```
644.nab_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang
```

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

649.fotonik3d\_s: basepeak = yes

```
654.roms_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 74.9

PowerEdge R7515 (AMD EPYC 7302P, 3.00GHz)

SPECspeed®2017\_fp\_peak = 76.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

621.wrf\_s (continued):

```

-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -O3 -funroll-loops
-Mrecursive -Kieee -fno-finite-math-only -DSPEC_OPENMP
-fopenmp -DUSE_OPENMP -fopenmp=libomp -lomp -lpthread
-ldl -lmvec -lamdlibm -ljemalloc -lflang

```

627.cam4\_s: Same as 621.wrf\_s

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type

Fortran benchmarks:

-Wno-return-type

Benchmarks using both Fortran and C:

-Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE5.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 74.9

PowerEdge R7515 (AMD EPYC 7302P, 3.00GHz)

SPECspeed®2017\_fp\_peak = 76.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-08-19 13:01:52-0400.  
Report generated on 2019-10-29 16:10:41 by CPU2017 PDF formatter v6255.  
Originally published on 2019-10-29.