



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.25 GHz, AMD EPYC 7742

SPECspeed®2017\_fp\_base = 136

SPECspeed®2017\_fp\_peak = 136

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

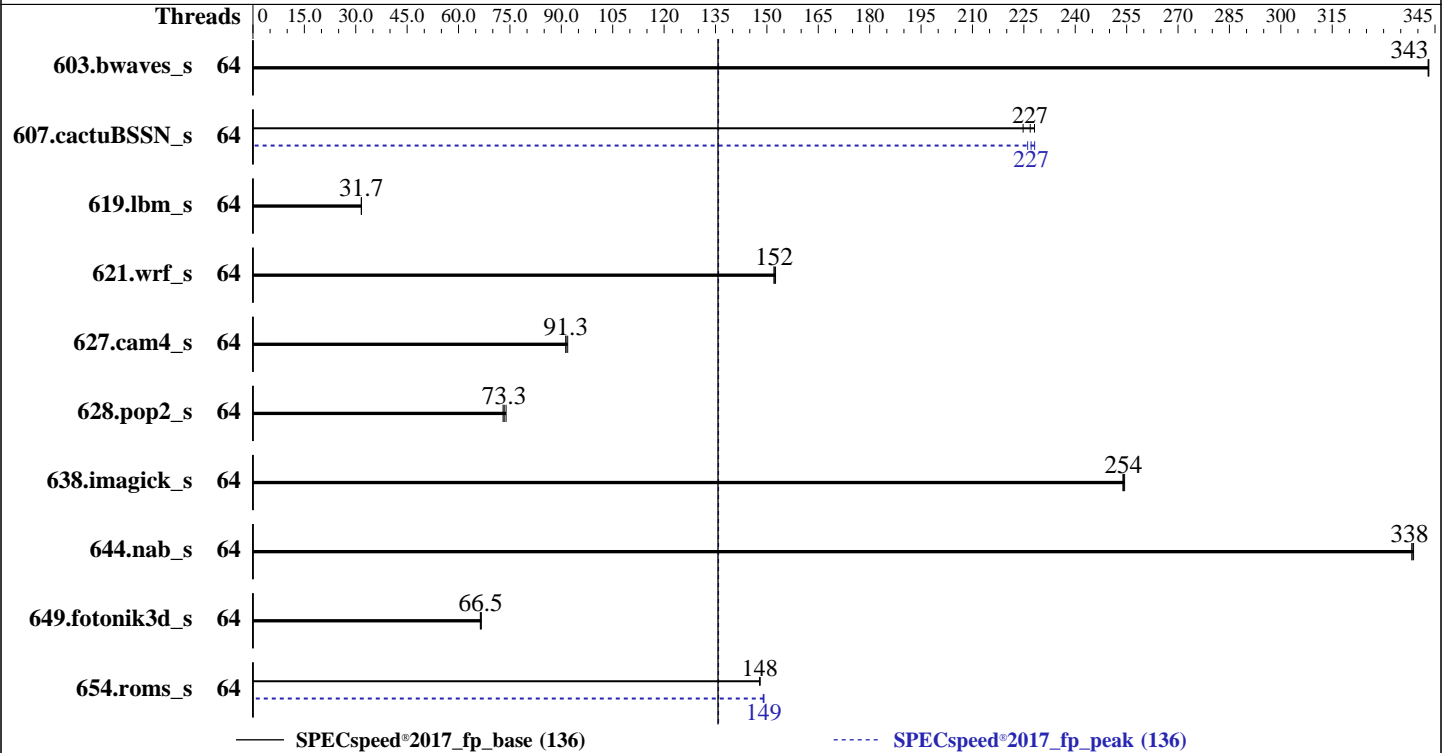

### Hardware

CPU Name: AMD EPYC 7742  
 Max MHz: 3400  
 Nominal: 2250  
 Enabled: 64 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 16 MB shared / 4 cores  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1 (x86\_64)  
 Kernel 4.12.14-195-default  
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version CFE105D released Sep-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.25 GHz, AMD EPYC 7742

SPECSpeed®2017\_fp\_base = 136

SPECSpeed®2017\_fp\_peak = 136

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Dec-2019  
Hardware Availability: Aug-2019  
Software Availability: Aug-2019

## Results Table

| Benchmark       | Base    |             |             |             |             |             |             | Peak    |             |             |             |             |             |             |
|-----------------|---------|-------------|-------------|-------------|-------------|-------------|-------------|---------|-------------|-------------|-------------|-------------|-------------|-------------|
|                 | Threads | Seconds     | Ratio       | Seconds     | Ratio       | Seconds     | Ratio       | Threads | Seconds     | Ratio       | Seconds     | Ratio       | Seconds     | Ratio       |
| 603.bwaves_s    | 64      | 172         | 343         | <u>172</u>  | <u>343</u>  | 172         | 343         | 64      | 172         | 343         | <u>172</u>  | <u>343</u>  | 172         | 343         |
| 607.cactuBSSN_s | 64      | <u>73.5</u> | <u>227</u>  | 74.2        | 225         | 73.1        | 228         | 64      | <u>73.4</u> | <u>227</u>  | 73.1        | 228         | 73.7        | 226         |
| 619.lbm_s       | 64      | 165         | 31.7        | <u>165</u>  | <u>31.7</u> | 166         | 31.6        | 64      | 165         | 31.7        | <u>165</u>  | <u>31.7</u> | 166         | 31.6        |
| 621.wrf_s       | 64      | 86.7        | 153         | <u>86.9</u> | <u>152</u>  | 87.0        | 152         | 64      | 86.7        | 153         | <u>86.9</u> | <u>152</u>  | 87.0        | 152         |
| 627.cam4_s      | 64      | 96.5        | 91.9        | 97.0        | 91.3        | <u>97.0</u> | <u>91.3</u> | 64      | 96.5        | 91.9        | 97.0        | 91.3        | <u>97.0</u> | <u>91.3</u> |
| 628.pop2_s      | 64      | <u>162</u>  | <u>73.3</u> | 161         | 73.9        | 163         | 73.0        | 64      | <u>162</u>  | <u>73.3</u> | 161         | 73.9        | 163         | 73.0        |
| 638.imagick_s   | 64      | <u>56.8</u> | <u>254</u>  | 56.8        | 254         | 56.7        | 254         | 64      | <u>56.8</u> | <u>254</u>  | 56.8        | 254         | 56.7        | 254         |
| 644.nab_s       | 64      | 51.6        | 338         | 51.6        | 339         | <u>51.6</u> | <u>338</u>  | 64      | 51.6        | 338         | 51.6        | 339         | <u>51.6</u> | <u>338</u>  |
| 649.fotonik3d_s | 64      | 137         | 66.4        | <u>137</u>  | <u>66.5</u> | 137         | 66.7        | 64      | 137         | 66.4        | <u>137</u>  | <u>66.5</u> | 137         | 66.7        |
| 654.roms_s      | 64      | <u>106</u>  | <u>148</u>  | 106         | 148         | 106         | 148         | 64      | <u>106</u>  | <u>149</u>  | 106         | 149         | 106         | 149         |

SPECSpeed®2017\_fp\_base = **136**

SPECSpeed®2017\_fp\_peak = **136**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR655  
2.25 GHz, AMD EPYC 7742

SPECspeed®2017\_fp\_base = 136

SPECspeed®2017\_fp\_peak = 136

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2019  
**Hardware Availability:** Aug-2019  
**Software Availability:** Aug-2019

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-63"  
LD\_LIBRARY\_PATH =  
  "/home/cpu2017-1.1.0-amd-rome-aocc200-C1/amd\_speed\_aocc200\_rome\_C\_lib/64  
  ;/home/cpu2017-1.1.0-amd-rome-aocc200-C1/amd\_speed\_aocc200\_rome\_C\_lib/32  
  :"  
MALLOC\_CONF = "retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "64"

Environment variables set by runcpu during the 607.cactuBSSN\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-63"

Environment variables set by runcpu during the 654.roms\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-63"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.  
jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto  
jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS settings:  
Set Operating Mode set to Maximum Performance  
SMT Mode set to Disabled

Sysinfo program /home/cpu2017-1.1.0-amd-rome-aocc200-C1/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.25 GHz, AMD EPYC 7742

SPECspeed®2017\_fp\_base = 136

SPECspeed®2017\_fp\_peak = 136

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2019  
**Hardware Availability:** Aug-2019  
**Software Availability:** Aug-2019

### Platform Notes (Continued)

running on linux-01om Tue Dec 17 23:13:02 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7742 64-Core Processor
 1 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 64
siblings : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 43 bits physical, 48 bits virtual
CPU(s): 64
On-line CPU(s) list: 0-63
Thread(s) per core: 1
Core(s) per socket: 64
Socket(s): 1
NUMA node(s): 1
Vendor ID: AuthenticAMD
CPU family: 23
Model: 49
Model name: AMD EPYC 7742 64-Core Processor
Stepping: 0
CPU MHz: 2250.000
CPU max MHz: 2250.0000
CPU min MHz: 1500.0000
BogoMIPS: 4491.47
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 16384K
NUMA node0 CPU(s): 0-63
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 136

ThinkSystem SR655  
2.25 GHz, AMD EPYC 7742

SPECspeed®2017\_fp\_peak = 136

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2019  
**Hardware Availability:** Aug-2019  
**Software Availability:** Aug-2019

### Platform Notes (Continued)

```
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep
bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56
57 58 59 60 61 62 63
node 0 size: 257758 MB
node 0 free: 256913 MB
node distances:
node 0
0: 10
```

```
From /proc/meminfo
MemTotal: 263944348 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

```
uname -a:
Linux linux-01om 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault): Not affected

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.25 GHz, AMD EPYC 7742

SPECspeed®2017\_fp\_base = 136

SPECspeed®2017\_fp\_peak = 136

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2019  
**Hardware Availability:** Aug-2019  
**Software Availability:** Aug-2019

### Platform Notes (Continued)

|   |  |
|---|--|
| Microarchitectural Data Sampling:         | Not affected   |
| CVE-2017-5754 (Meltdown):                 | Not affected   |
| CVE-2018-3639 (Speculative Store Bypass): | Mitigation: Speculative Store Bypass disabled via prctl and seccomp                      |
| CVE-2017-5753 (Spectre variant 1):        | Mitigation: __user pointer sanitization  |
| CVE-2017-5715 (Spectre variant 2):        | Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling |

run-level 3 Dec 17 22:49

```

SPEC is set to: /home/cpu2017-1.1.0-amd-rome-aocc200-C1
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   893G   57G  837G   7% /

```

```

From /sys/devices/virtual/dmi/id
BIOS:      Lenovo          CFE105D 09/17/2019
Vendor:    Lenovo
Product:   ThinkSystem SR655 -[7Y00000000]-
Product Family: ThinkSystem
Serial:    0123456789

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
 8x Samsung M393A4K40DB2-CWE 32 kB 2 rank 3200
 8x Unknown Unknown

```

(End of data from sysinfo program)

### Compiler Version Notes

```

=====
C          | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
          | 644.nab_s(base, peak)
-----
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0-Build#191) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
=====

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.25 GHz, AMD EPYC 7742

SPECspeed®2017\_fp\_base = 136

SPECspeed®2017\_fp\_peak = 136

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2019  
**Hardware Availability:** Aug-2019  
**Software Availability:** Aug-2019

### Compiler Version Notes (Continued)

C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

```
-----
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

```
=====
Fortran          | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                  | 654.roms_s(base, peak)
-----
```

```
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

```
=====
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                  | 628.pop2_s(base, peak)
-----
```

```
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655  
2.25 GHz, AMD EPYC 7742

SPECspeed®2017\_fp\_base = 136

SPECspeed®2017\_fp\_peak = 136

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

619.ibm\_s: -DSPEC\_LP64

621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64

627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64

628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64

638.imagick\_s: -DSPEC\_LP64

644.nab\_s: -DSPEC\_LP64

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp  
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm  
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017\_fp\_base = 136

ThinkSystem SR655  
2.25 GHz, AMD EPYC 7742

SPECspeed®2017\_fp\_peak = 136

CPU2017 License: 9017

Test Date: Dec-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2019

Tested by: Lenovo Global Technology

Software Availability: Aug-2019

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -freemap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-DSPEC_OPENMP -fopenmp -DUSE_OPENMP -fopenmp=libomp -lomp -lpthread
-ldl -lmvec -lamdlibm -ljemalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR655  
2.25 GHz, AMD EPYC 7742

SPECspeed®2017\_fp\_base = 136

SPECspeed®2017\_fp\_peak = 136

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2019  
**Hardware Availability:** Aug-2019  
**Software Availability:** Aug-2019

## Base Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-return-type

## Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

649.fotonik3d\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655  
2.25 GHz, AMD EPYC 7742

SPECspeed®2017\_fp\_base = 136

SPECspeed®2017\_fp\_peak = 136

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2019  
**Hardware Availability:** Aug-2019  
**Software Availability:** Aug-2019

## Peak Optimization Flags (Continued)

```
654.roms_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
621.wrf_s: basepeak = yes
627.cam4_s: basepeak = yes
628.pop2_s: basepeak = yes
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch -mllvm -loop-unswitch-threshold=200000
-O3 -funroll-loops -Mrecursive -Kieee -fno-finite-math-only
-DSPEC_OPENMP -fopenmp -DUSE_OPENMP -fopenmp=libomp -lomp -lpthread
-ldl -lmvec -lamdlibm -ljemalloc -lflang
```

## Peak Other Flags

C benchmarks:  
-Wno-return-type

Fortran benchmarks:  
-Wno-return-type

Benchmarks using both Fortran and C:  
-Wno-return-type

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR655  
2.25 GHz, AMD EPYC 7742

SPECspeed®2017\_fp\_base = 136

SPECspeed®2017\_fp\_peak = 136

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2019

**Hardware Availability:** Aug-2019

**Software Availability:** Aug-2019

## Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-1.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-1.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome-C.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-12-17 10:13:02-0500.

Report generated on 2020-01-08 12:07:45 by CPU2017 PDF formatter v6255.

Originally published on 2020-01-07.