



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250
(3.70 GHz, Intel Xeon E-2288G)

SPECspeed®2017_fp_base = 35.8

SPECspeed®2017_fp_peak = 36.3

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2020

Hardware Availability: Mar-2020

Software Availability: Jun-2019

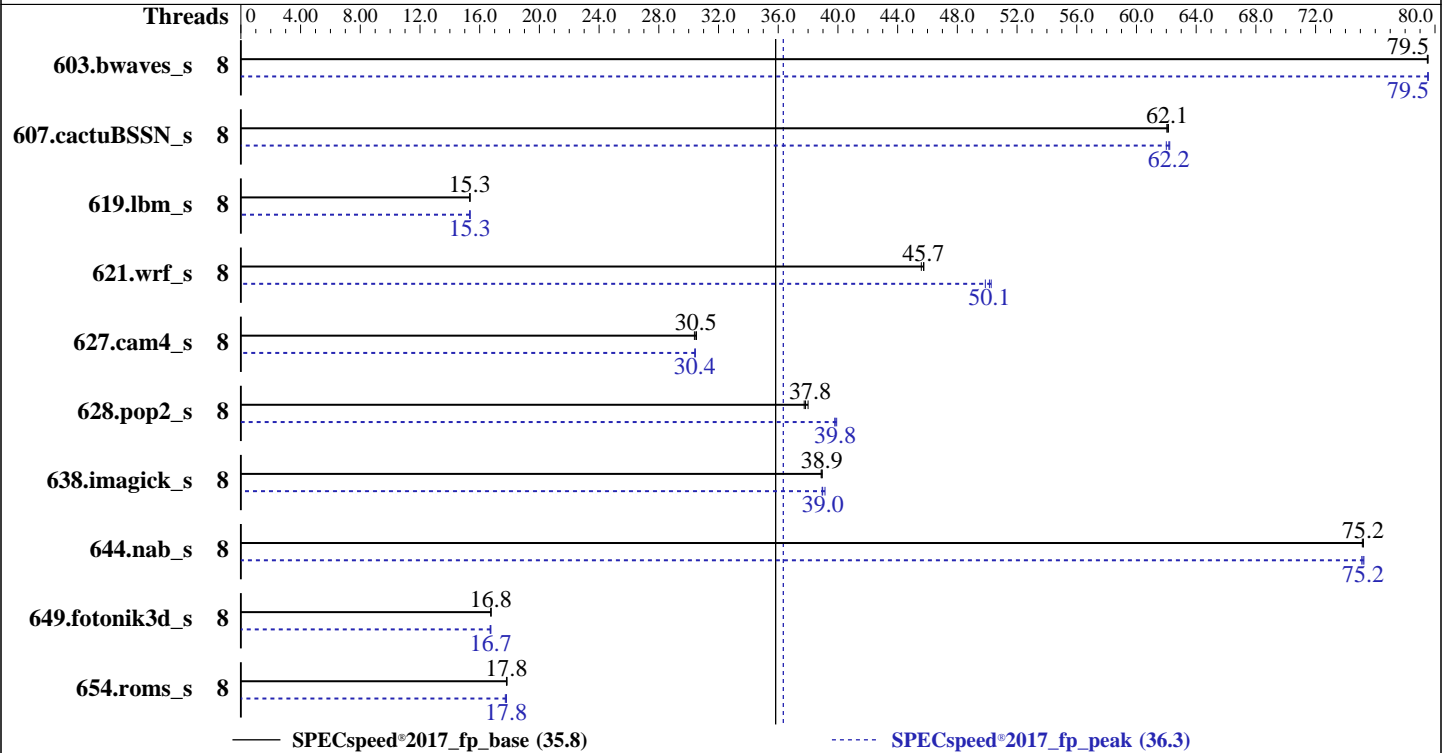

Hardware

CPU Name: Intel Xeon E-2288G
 Max MHz: 5000
 Nominal: 3700
 Enabled: 8 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 256 KB I+D on chip per core
 L3: 16 MB I+D on chip per chip
 Other: None
 Memory: 64 GB (2 x 32 GB 2Rx8 PC4-2666V-E)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP1 (x86_64)
 Kernel 4.12.14-195-default
 Compiler: C/C++: Version 19.0.4.227 of Intel
 C/C++ Compiler for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran
 Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: Lenovo BIOS Version ISE113H 2.00 released Dec-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 35.8

ThinkSystem SR250
(3.70 GHz, Intel Xeon E-2288G)

SPECspeed®2017_fp_peak = 36.3

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2020
Hardware Availability: Mar-2020
Software Availability: Jun-2019

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	8	742	79.5	<u>742</u>	<u>79.5</u>	742	79.5	8	742	79.5	<u>742</u>	<u>79.5</u>	742	79.5
607.cactuBSSN_s	8	<u>269</u>	<u>62.1</u>	269	62.0	268	62.1	8	268	62.2	269	62.0	<u>268</u>	<u>62.2</u>
619.lbm_s	8	342	15.3	<u>341</u>	<u>15.3</u>	341	15.4	8	341	15.4	<u>341</u>	<u>15.3</u>	341	15.3
621.wrf_s	8	290	45.6	289	45.8	<u>289</u>	<u>45.7</u>	8	263	50.3	<u>264</u>	<u>50.1</u>	265	49.9
627.cam4_s	8	290	30.5	<u>291</u>	<u>30.5</u>	292	30.4	8	291	30.4	<u>291</u>	<u>30.4</u>	291	30.4
628.pop2_s	8	312	38.0	<u>314</u>	<u>37.8</u>	315	37.7	8	<u>298</u>	<u>39.8</u>	297	39.9	298	39.8
638.imagick_s	8	<u>371</u>	<u>38.9</u>	370	38.9	371	38.9	8	370	38.9	<u>370</u>	<u>39.0</u>	369	39.1
644.nab_s	8	233	75.1	232	75.2	<u>232</u>	<u>75.2</u>	8	233	75.1	<u>232</u>	<u>75.2</u>	232	75.2
649.fotonik3d_s	8	544	16.7	<u>544</u>	<u>16.8</u>	544	16.8	8	546	16.7	545	16.7	<u>545</u>	<u>16.7</u>
654.roms_s	8	885	17.8	883	17.8	<u>884</u>	<u>17.8</u>	8	885	17.8	<u>886</u>	<u>17.8</u>	889	17.7

SPECspeed®2017_fp_base = **35.8**

SPECspeed®2017_fp_peak = **36.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.0-ic19.0u4/lib/intel64"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250
(3.70 GHz, Intel Xeon E-2288G)

SPECspeed®2017_fp_base = 35.8

SPECspeed®2017_fp_peak = 36.3

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2020
Hardware Availability: Mar-2020
Software Availability: Jun-2019

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance
Hyper-Threading set to Disable

sysinfo program /home/cpu2017-1.1.0-ic19.0u4/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-jecn Tue Jan 7 18:58:47 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) E-2288G CPU @ 3.70GHz
 1 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 8
siblings       : 8
physical 0:    cores 0 1 2 3 4 5 6 7
```

From lscpu:

```
Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
Address sizes:   39 bits physical, 48 bits virtual
CPU(s):          8
On-line CPU(s) list: 0-7
Thread(s) per core: 1
Core(s) per socket: 8
Socket(s):       1
NUMA node(s):   1
Vendor ID:       GenuineIntel
CPU family:      6
Model:           158
Model name:      Intel(R) Xeon(R) E-2288G CPU @ 3.70GHz
Stepping:        13
CPU MHz:         3700.000
CPU max MHz:     5000.0000
CPU min MHz:     800.0000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250
(3.70 GHz, Intel Xeon E-2288G)

SPECspeed®2017_fp_base = 35.8

SPECspeed®2017_fp_peak = 36.3

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2020
Hardware Availability: Mar-2020
Software Availability: Jun-2019

Platform Notes (Continued)

```

BogoMIPS:          7392.00
Virtualization:    VT-x
L1d cache:         32K
L1i cache:         32K
L2 cache:          256K
L3 cache:          16384K
NUMA node0 CPU(s): 0-7
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single
ssbd ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt
intel_pt xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts hwp hwp_notify
hwp_act_window hwp_epp md_clear flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 16384 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 64353 MB
node 0 free: 63851 MB
node distances:
node    0
0:     10

```

```

From /proc/meminfo
MemTotal:        65898004 kB
HugePages_Total: 0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 35.8

ThinkSystem SR250
(3.70 GHz, Intel Xeon E-2288G)

SPECspeed®2017_fp_peak = 36.3

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2020
Hardware Availability: Mar-2020
Software Availability: Jun-2019

Platform Notes (Continued)

```
uname -a:
Linux linux-jecn 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:          Not affected
CVE-2017-5754 (Meltdown):                  Not affected
CVE-2018-3639 (Speculative Store Bypass):  Mitigation: Speculative Store Bypass disabled
                                              via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):         Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):         Mitigation: Enhanced IBRS, IBPB: conditional,
                                              RSB filling
```

```
run-level 3 Jan 7 18:56
```

```
SPEC is set to: /home/cpu2017-1.1.0-ic19.0u4
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   446G   19G  427G   5% /
```

```
From /sys/devices/virtual/dmi/id
BIOS:      Lenovo -[ISE113H-2.00]- 12/27/2019
Vendor:    Lenovo
Product:   ThinkSystem SR250 -[7Y51CTO0WW]-
Product Family: ThinkSystem
Serial:    1234567890
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
2x Not Specified Not Specified
2x SK Hynix HMAA4GU7AJR8N-VK 32767 MB 2 rank 2666
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C          | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
          | 644.nab_s(base, peak)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250
(3.70 GHz, Intel Xeon E-2288G)

SPECspeed®2017_fp_base = 35.8

SPECspeed®2017_fp_peak = 36.3

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2020
Hardware Availability: Mar-2020
Software Availability: Jun-2019

Compiler Version Notes (Continued)

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
| 628.pop2_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

Fortran benchmarks:
ifort -m64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 35.8

ThinkSystem SR250
(3.70 GHz, Intel Xeon E-2288G)

SPECspeed®2017_fp_peak = 36.3

CPU2017 License: 9017

Test Date: Jan-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2020

Tested by: Lenovo Global Technology

Software Availability: Jun-2019

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250
(3.70 GHz, Intel Xeon E-2288G)

SPECspeed®2017_fp_base = 35.8

SPECspeed®2017_fp_peak = 36.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2020

Hardware Availability: Mar-2020

Software Availability: Jun-2019

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
603.bwaves_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP  
-DSPEC_OPENMP -O2 -xCORE-AVX2 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs
```

649.fotonik3d_s: Same as 603.bwaves_s

```
654.roms_s: -DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR250
(3.70 GHz, Intel Xeon E-2288G)

SPECspeed®2017_fp_base = 35.8

SPECspeed®2017_fp_peak = 36.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2020

Hardware Availability: Mar-2020

Software Availability: Jun-2019

Peak Optimization Flags (Continued)

```
627.cam4_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs
```

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-I.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-01-07 05:58:47-0500.

Report generated on 2020-02-11 10:03:24 by CPU2017 PDF formatter v6255.

Originally published on 2020-02-11.