



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017_fp_base = 46.9

Express5800/R120h-1M (Intel Xeon Silver 4208)

SPECrate®2017_fp_peak = 48.9

CPU2017 License: 9006


Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

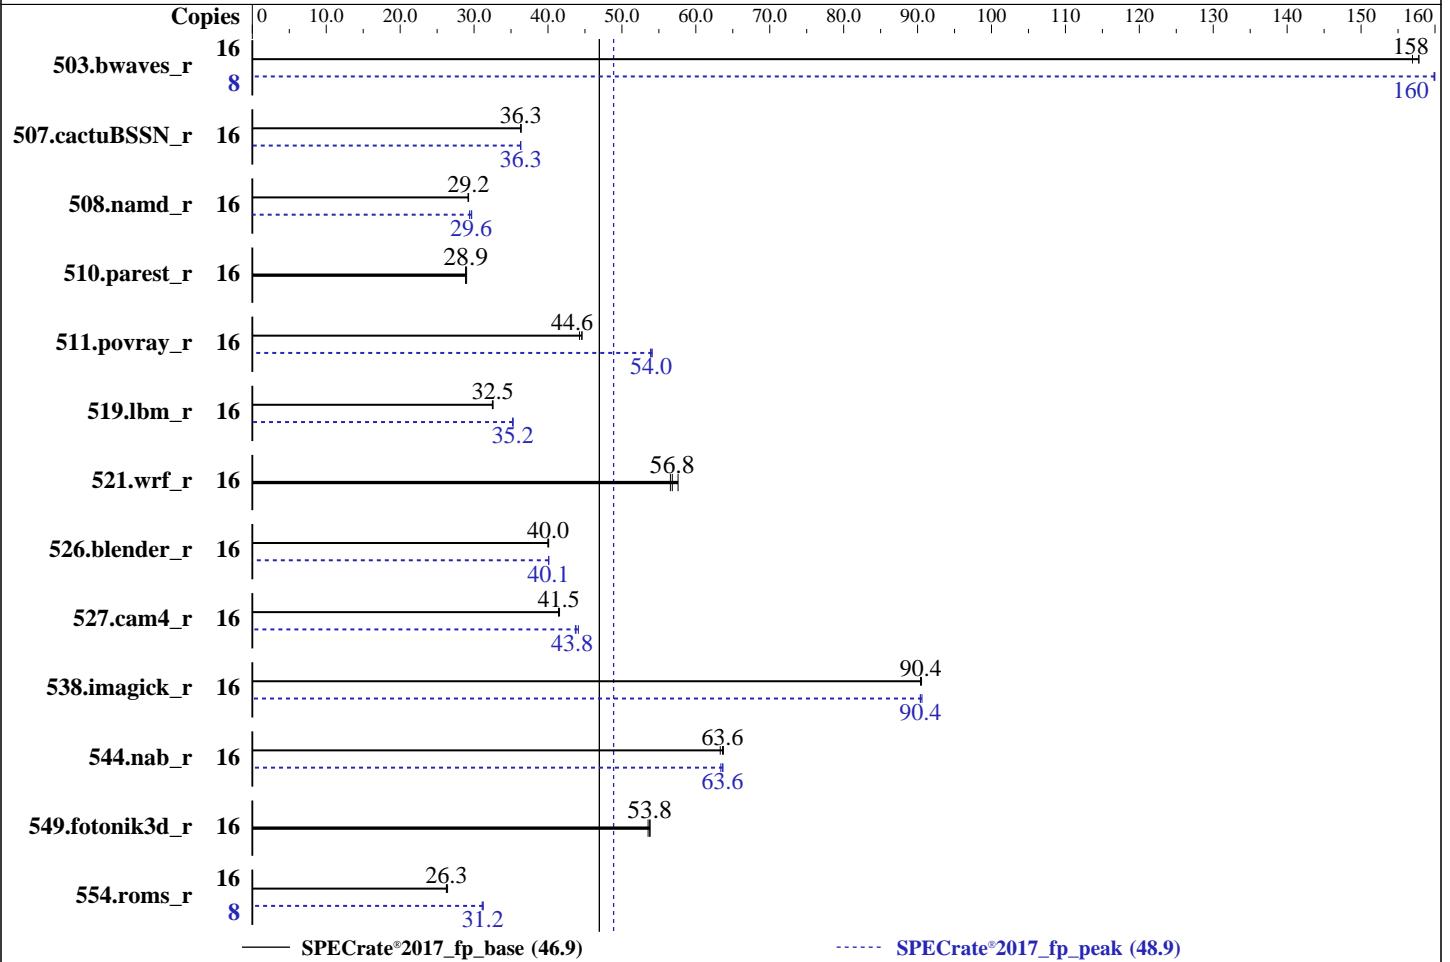

Hardware

CPU Name: Intel Xeon Silver 4208
 Max MHz: 3200
 Nominal: 2100
 Enabled: 8 cores, 1 chip, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 11 MB I+D on chip per chip
 Other: None
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2933Y-R, running at 2400)
 Storage: 1 x 1 TB SATA, 7200 RPM, RAID 0
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.7 (Maipo)
 Kernel 3.10.0-1062.1.1.el7.x86_64
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
 Parallel: No
 Firmware: NEC BIOS Version U32 v2.22 11/13/2019 released Mar-2020
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017_fp_base = 46.9

Express5800/R120h-1M (Intel Xeon Silver 4208)

SPECrate®2017_fp_peak = 48.9

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	16	1017	158	1017	158	1022	157	8	502	160	502	160	501	160
507.cactuBSSN_r	16	558	36.3	558	36.3	557	36.4	16	558	36.3	558	36.3	558	36.3
508.namd_r	16	520	29.2	519	29.3	521	29.2	16	513	29.6	517	29.4	512	29.7
510.parest_r	16	1444	29.0	1449	28.9	1451	28.9	16	1444	29.0	1449	28.9	1451	28.9
511.povray_r	16	844	44.3	838	44.6	838	44.6	16	691	54.1	692	54.0	694	53.9
519.lbm_r	16	519	32.5	518	32.6	519	32.5	16	478	35.3	479	35.2	478	35.2
521.wrf_r	16	634	56.6	631	56.8	622	57.6	16	634	56.6	631	56.8	622	57.6
526.blender_r	16	608	40.1	609	40.0	609	40.0	16	608	40.1	608	40.1	607	40.1
527.cam4_r	16	673	41.6	675	41.5	676	41.4	16	634	44.1	639	43.8	640	43.7
538.imagick_r	16	440	90.4	440	90.5	440	90.4	16	440	90.4	440	90.4	439	90.6
544.nab_r	16	423	63.7	423	63.6	425	63.3	16	423	63.6	423	63.7	425	63.4
549.fotonik3d_r	16	1160	53.8	1165	53.5	1159	53.8	16	1160	53.8	1165	53.5	1159	53.8
554.roms_r	16	968	26.3	963	26.4	968	26.3	8	407	31.2	409	31.1	407	31.2

SPECrate®2017_fp_base = 46.9

SPECrate®2017_fp_peak = 48.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017_fp_base = 46.9

Express5800/R120h-1M (Intel Xeon Silver 4208)

SPECrate®2017_fp_peak = 48.9

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

- Thermal Configuration: Maximum Cooling
- Workload Profile: General Throughput Compute
- Memory Patrol Scrubbing: Disabled
- LLC Dead Line Allocation: Disabled
- LLC Prefetch: Enabled
- Enhanced Processor Performance: Enabled
- Workload Profile: Custom
- Advanced Memory Protection: Advanced ECC Support
- Sub-NUMA Clustering: Disabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on r120h1m Mon Mar 30 17:46:33 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Silver 4208 CPU @ 2.10GHz
 1 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 8
  siblings    : 16
 physical 0   : cores 0 1 2 3 4 5 6 7

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                16
On-line CPU(s) list:   0-15
Thread(s) per core:    2

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017_fp_base = 46.9

Express5800/R120h-1M (Intel Xeon Silver 4208)

SPECrate®2017_fp_peak = 48.9

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Mar-2020
Hardware Availability: Dec-2019
Software Availability: Sep-2019

Platform Notes (Continued)

```

Core(s) per socket:      8
Socket(s):               1
NUMA node(s):           1
Vendor ID:               GenuineIntel
CPU family:              6
Model:                   85
Model name:              Intel(R) Xeon(R) Silver 4208 CPU @ 2.10GHz
Stepping:                6
CPU MHz:                 2100.000
BogoMIPS:                4200.00
Virtualization:         VT-x
L1d cache:               32K
L1i cache:               32K
L2 cache:                1024K
L3 cache:                11264K
NUMA node0 CPU(s):      0-15

```

```

Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
intel_ppin intel_pt ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw
avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni md_clear spec_ctrl intel_stibp
flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 11264 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
node 0 size: 196265 MB
node 0 free: 191441 MB
node distances:
node 0
0: 10

```

```

From /proc/meminfo
MemTotal:      197747132 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017_fp_base = 46.9

Express5800/R120h-1M (Intel Xeon Silver 4208)

SPECrate®2017_fp_peak = 48.9

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Mar-2020
Hardware Availability: Dec-2019
Software Availability: Sep-2019

Platform Notes (Continued)

From /etc/*release* /etc/*version*

os-release:

```
NAME="Red Hat Enterprise Linux Server"
VERSION="7.7 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.7"
```

```
PRETTY_NAME="Red Hat Enterprise Linux Server 7.7 (Maipo)"
```

```
redhat-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
```

```
system-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
```

```
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.7:ga:server
```

uname -a:

```
Linux r120h1m 3.10.0-1062.1.1.el7.x86_64 #1 SMP Tue Aug 13 18:39:59 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:          Not affected
CVE-2017-5754 (Meltdown):                  Not affected
CVE-2018-3639 (Speculative Store Bypass):  Mitigation: Speculative Store Bypass disabled
                                              via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):         Mitigation: Load fences, usercopy/swaps
                                              barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):         Mitigation: Full retpoline, IBPB
```

run-level 3 Mar 30 17:40

SPEC is set to: /home/cpu2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext4  908G  77G   786G   9% /
```

From /sys/devices/virtual/dmi/id

```
BIOS:          NEC U32 11/13/2019
Vendor:        NEC
Product:       Express5800/R120h-1M
Serial:        JPN0084094
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
12x HPE P03050-091 16 GB 2 rank 2933
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017_fp_base = 46.9

Express5800/R120h-1M (Intel Xeon Silver 4208)

SPECrate®2017_fp_peak = 48.9

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Mar-2020
Hardware Availability: Dec-2019
Software Availability: Sep-2019

Platform Notes (Continued)

12x UNKNOWN NOT AVAILABLE

(End of data from sysinfo program)

Regarding the sysinfo display about the memory speed, the correct configured memory speed is 2400 MT/s. The dmidecode description should be as follows:

12x HPE P03050-091 16 GB 2 rank 2933, configured at 2400

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
| 544.nab_r(base, peak)
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017_fp_base = 46.9

Express5800/R120h-1M (Intel Xeon Silver 4208)

SPECrate®2017_fp_peak = 48.9

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017_fp_base = 46.9

Express5800/R120h-1M (Intel Xeon Silver 4208)

SPECrate®2017_fp_peak = 48.9

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte
```




SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017_fp_base = 46.9

Express5800/R120h-1M (Intel Xeon Silver 4208)

SPECrate®2017_fp_peak = 48.9

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

544.nab_r: Same as 538.imagick_r

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017_fp_base = 46.9

Express5800/R120h-1M (Intel Xeon Silver 4208)

SPECrate®2017_fp_peak = 48.9

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

Peak Optimization Flags (Continued)

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -auto
-nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: basepeak = yes

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

Benchmarks using both C and C++:

511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4

526.blender_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
-align array32byte

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevE.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

SPECrate®2017_fp_base = 46.9

Express5800/R120h-1M (Intel Xeon Silver 4208)

SPECrate®2017_fp_peak = 48.9

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Mar-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-03-30 04:46:32-0400.

Report generated on 2020-04-14 14:10:59 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.