



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 117

PowerEdge R440 (Intel Xeon Gold 5217, 3.00 GHz)

SPECrate®2017_int_peak = 121

CPU2017 License: 55


Test Date: Apr-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

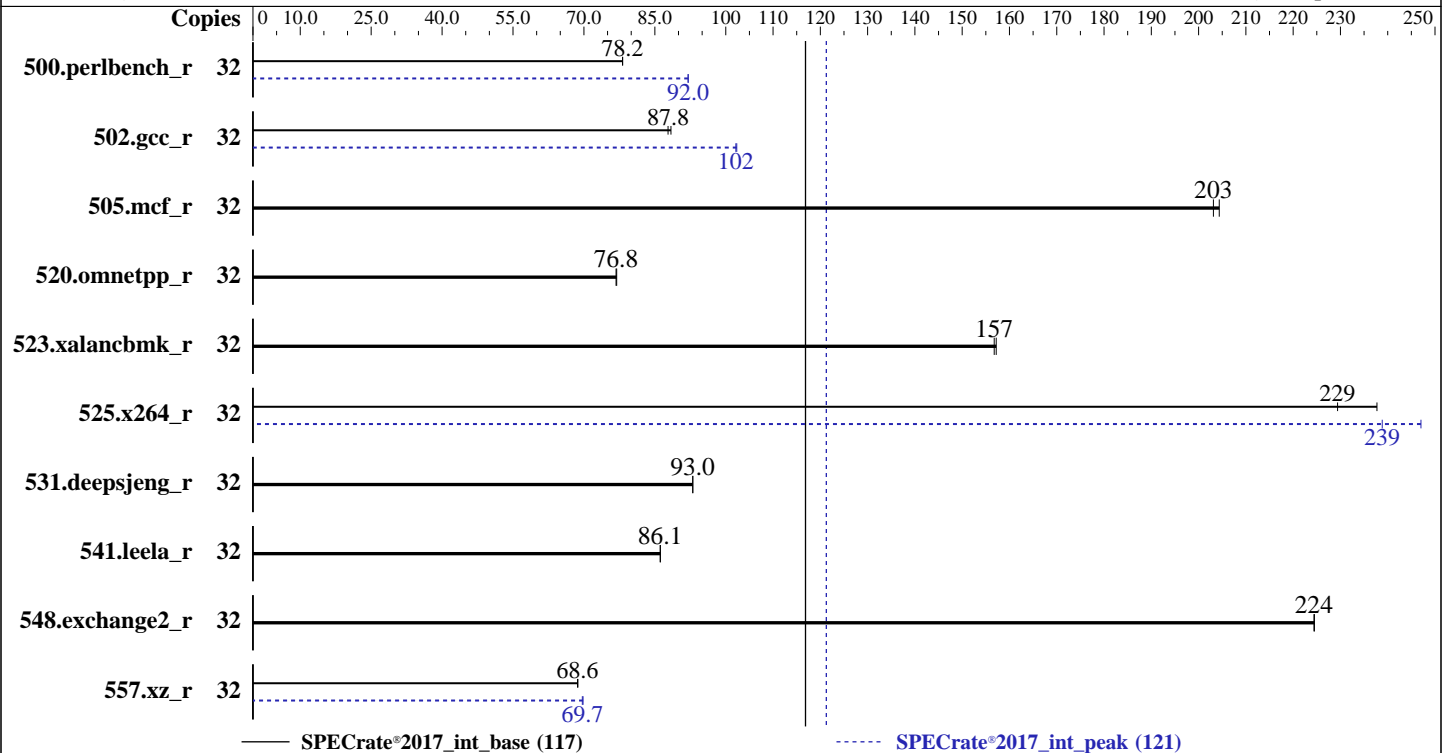

Hardware

CPU Name: Intel Xeon Gold 5217
 Max MHz: 3700
 Nominal: 3000
 Enabled: 32 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 11 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx8 PC4-3200V-R, running at 2933)
 Storage: 1 x 1.92 TB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 8.1
 kernel 4.18.0-147.el8.x86_64
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 2.7.7 released May-2020
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None
 jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 117

PowerEdge R440 (Intel Xeon Gold 5217, 3.00 GHz)

SPECrate®2017_int_peak = 121

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Apr-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	652	78.2	651	78.2			32	554	92.0	553	92.1		
502.gcc_r	32	516	87.8	513	88.4			32	444	102	443	102		
505.mcf_r	32	255	203	253	204			32	255	203	253	204		
520.omnetpp_r	32	547	76.8	546	76.9			32	547	76.8	546	76.9		
523.xalancbmk_r	32	216	157	215	157			32	216	157	215	157		
525.x264_r	32	244	229	236	238			32	227	247	235	239		
531.deepsjeng_r	32	394	93.0	394	93.0			32	394	93.0	394	93.0		
541.leela_r	32	615	86.1	615	86.2			32	615	86.1	615	86.2		
548.exchange2_r	32	374	224	373	224			32	374	224	373	224		
557.xz_r	32	503	68.6	503	68.7			32	496	69.7	495	69.8		

SPECrate®2017_int_base = 117

SPECrate®2017_int_peak = 121

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 117

PowerEdge R440 (Intel Xeon Gold 5217, 3.00 GHz)

SPECrate®2017_int_peak = 121

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

General Notes

Binaries compiled on a system with 1x Intel Core i9-9900K CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS settings:

- Virtualization Technology disabled
- System Profile set to Custom
- CPU Performance set to Maximum Performance
- C States set to Autonomous
- C1E disabled
- Uncore Frequency set to Dynamic
- Energy Efficiency Policy set to Performance
- Memory Patrol Scrub set to standard
- Logical Processor disabled
- CPU Interconnect Bus Link Power Management disabled
- PCI ASPM L1 Link Power Management disabled
- UPI Prefetch enabled
- LLC Prefetch disabled
- Dead Line LLC Alloc enabled
- Directory AtoS disabled

Sysinfo program /home/cpu2017/bin/sysinfo

```
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on localhost.localdomain Tue Jun 2 09:19:44 2020
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 117

PowerEdge R440 (Intel Xeon Gold 5217, 3.00 GHz)

SPECrate®2017_int_peak = 121

CPU2017 License: 55

Test Date: Apr-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

Platform Notes (Continued)

```

model name : Intel(R) Xeon(R) Gold 5217 CPU @ 3.00GHz
  2 "physical id"s (chips)
  32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:   0-31
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):             2
NUMA node(s):         2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 5217 CPU @ 3.00GHz
Stepping:              6
CPU MHz:               1393.943
CPU max MHz:           3700.0000
CPU min MHz:           1200.0000
BogoMIPS:              6000.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              11264K
NUMA node0 CPU(s):    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30
NUMA node1 CPU(s):    1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 117

PowerEdge R440 (Intel Xeon Gold 5217, 3.00 GHz)

SPECrate®2017_int_peak = 121

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Platform Notes (Continued)

arch_capabilities

/proc/cpuinfo cache data
cache size : 11264 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30
node 0 size: 192074 MB
node 0 free: 191162 MB
node 1 cpus: 1 3 5 7 9 11 13 15 17 19 21 23 25 27 29 31
node 1 size: 193506 MB
node 1 free: 192578 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10
```

From /proc/meminfo
MemTotal: 394835328 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.1 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.1"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga

uname -a:
Linux localhost.localdomain 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 117

PowerEdge R440 (Intel Xeon Gold 5217, 3.00 GHz)

SPECrate®2017_int_peak = 121

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Platform Notes (Continued)

CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swaps barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Jun 2 09:18 last=5

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	1.7T	23G	1.7T	2%	/home

From /sys/devices/virtual/dmi/id

BIOS: Dell Inc. 2.7.7 05/06/2020
 Vendor: Dell Inc.
 Product: PowerEdge R440
 Product Family: PowerEdge
 Serial: F9TD613

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x 002C069D002C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
 4x Not Specified Not Specified

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C      | 502.gcc_r(peak)
-----
```

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen
 Build 20200304
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
      | 525.x264_r(base, peak) 557.xz_r(base)
-----
```

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
 NextGen Build 20200304

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 117

PowerEdge R440 (Intel Xeon Gold 5217, 3.00 GHz)

SPECrate®2017_int_peak = 121

CPU2017 License: 55

Test Date: Apr-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Apr-2020

Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 502.gcc_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen
Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 502.gcc_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen
Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 117

PowerEdge R440 (Intel Xeon Gold 5217, 3.00 GHz)

SPECrate®2017_int_peak = 121

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Compiler Version Notes (Continued)

```
-----
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
C          | 500.perlbench_r(peak) 557.xz_r(peak)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
C++       | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----
```

```
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
  NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran   | 548.exchange2_r(base, peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
  64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 117

PowerEdge R440 (Intel Xeon Gold 5217, 3.00 GHz)

SPECrate®2017_int_peak = 121

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 117

PowerEdge R440 (Intel Xeon Gold 5217, 3.00 GHz)

SPECrate®2017_int_peak = 121

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/ia32_lin
-std=gnu89
-w1,-plugin-opt=-x86-branches-within-32B-boundaries
-w1,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc

505.mcf_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 117

PowerEdge R440 (Intel Xeon Gold 5217, 3.00 GHz)

SPECrate®2017_int_peak = 121

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Peak Optimization Flags (Continued)

```
525.x264_r: -m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX2 -flto -O3 -ffast-math
-fuse-ld=gold -qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
557.xz_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

```
523.xalancbmk_r: basepeak = yes
```

```
531.deepsjeng_r: basepeak = yes
```

```
541.leela_r: basepeak = yes
```

Fortran benchmarks:

```
548.exchange2_r: basepeak = yes
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE10.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-06-02 10:19:43-0400.

Report generated on 2020-06-23 18:05:24 by CPU2017 PDF formatter v6255.

Originally published on 2020-06-23.