



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Nettrix


SPECrate®2017\_fp\_base = 222

## R620 G30 (Intel Xeon Gold 5218R)

SPECrate®2017\_fp\_peak = 228

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

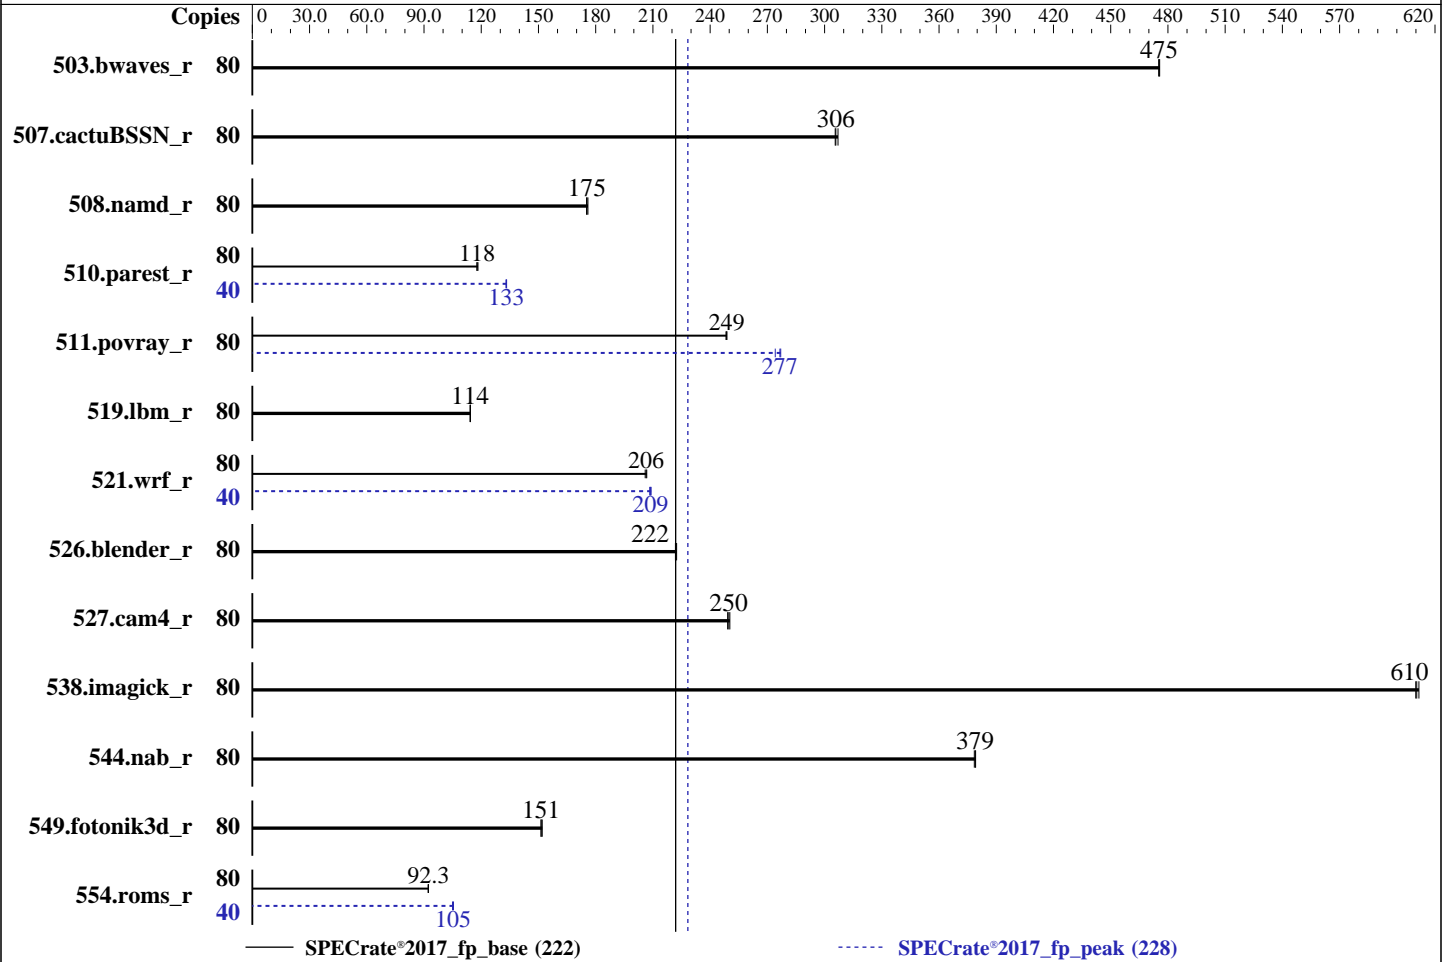

### Hardware

CPU Name: Intel Xeon Gold 5218R  
 Max MHz: 4000  
 Nominal: 2100  
 Enabled: 40 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 Chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 27.5 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-3200AA-R, running at 2667)  
 Storage: 1x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.0 (Ootpa) 4.18.0-80.el8.x86\_64  
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux Build 20200306;  
 Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux Build 20200306;  
 Parallel: No  
 Firmware: Nettrix BIOS Version NJGS041227 released May-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Nettrix

SPECrate®2017\_fp\_base = 222

## R620 G30 (Intel Xeon Gold 5218R)

SPECrate®2017\_fp\_peak = 228

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	80	<b>1688</b>	<b>475</b>	1687	476	1688	475	80	<b>1688</b>	<b>475</b>	1687	476	1688	475
507.cactuBSSN_r	80	<b>331</b>	<b>306</b>	330	307	331	306	80	<b>331</b>	<b>306</b>	330	307	331	306
508.namd_r	80	434	175	<b>433</b>	<b>175</b>	432	176	80	434	175	<b>433</b>	<b>175</b>	432	176
510.parest_r	80	1778	118	1769	118	<b>1775</b>	<b>118</b>	40	787	133	<b>786</b>	<b>133</b>	785	133
511.povray_r	80	<b>751</b>	<b>249</b>	752	248	751	249	80	<b>675</b>	<b>277</b>	681	274	674	277
519.lbm_r	80	738	114	<b>738</b>	<b>114</b>	738	114	80	738	114	<b>738</b>	<b>114</b>	738	114
521.wrf_r	80	870	206	867	207	<b>868</b>	<b>206</b>	40	<b>429</b>	<b>209</b>	430	208	429	209
526.blender_r	80	548	222	549	222	<b>549</b>	<b>222</b>	80	548	222	549	222	<b>549</b>	<b>222</b>
527.cam4_r	80	<b>560</b>	<b>250</b>	562	249	559	250	80	<b>560</b>	<b>250</b>	562	249	559	250
538.imagick_r	80	325	612	<b>326</b>	<b>610</b>	326	610	80	325	612	<b>326</b>	<b>610</b>	326	610
544.nab_r	80	355	379	<b>355</b>	<b>379</b>	356	378	80	355	379	<b>355</b>	<b>379</b>	356	378
549.fotonik3d_r	80	2060	151	<b>2059</b>	<b>151</b>	2051	152	80	2060	151	<b>2059</b>	<b>151</b>	2051	152
554.roms_r	80	<b>1377</b>	<b>92.3</b>	1380	92.1	1377	92.3	40	603	105	606	105	<b>604</b>	<b>105</b>

SPECrate®2017\_fp\_base = 222

SPECrate®2017\_fp\_peak = 228

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

### Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Tuning Kernel Parameters:

```
sched_migration_cost_ns=1000
sched_rt_runtime_us=990000
sched_latency_ns=24000000
sched_min_granularity_ns=10000000
dirty_background_ratio=10
dirty_ratio=40
dirty_writeback_centisecs=1500
dirty_expire_centisecs=1800
swappiness=10
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017\_fp\_base = 222

R620 G30 (Intel Xeon Gold 5218R)

SPECrate®2017\_fp\_peak = 228

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

## Operating System Notes (Continued)

numa\_balancing=0

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/admin/benchmarks/cpu2017/lib/intel64:/home/admin/benchmarks/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0  
NA : The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

Application Performance Profile Set to Computing Throughput Mode  
Hyper-Threading set to Enabled  
MONITOR/MWAIT set to Enabled  
Autonomous Core C-State set to Enabled  
SNC set to Enabled  
IMC set to 1-Way Interleaving  
XPT Prefetch set to Enabled  
KTI Prefetch set to Disabled  
Stale AtoS set to Enabled  
Patrol Scrub set to Disabled  
LLC Dead Line Allocation set to Disabled  
BMC Settings:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017\_fp\_base = 222

R620 G30 (Intel Xeon Gold 5218R)

SPECrate®2017\_fp\_peak = 228

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

## Platform Notes (Continued)

Cooling Policy set to Manual Mode  
Fan Duty set to 95

Sysinfo program /home/admin/benchmarks/cpu2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on localhost.localdomain Mon Jul 13 09:40:47 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz  
2 "physical id"s (chips)  
80 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 20  
siblings : 40  
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28  
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 80  
On-line CPU(s) list: 0-79  
Thread(s) per core: 2  
Core(s) per socket: 20  
Socket(s): 2  
NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz  
Stepping: 7  
CPU MHz: 1950.977  
CPU max MHz: 4000.0000  
CPU min MHz: 800.0000  
BogoMIPS: 4200.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 28160K  
NUMA node0 CPU(s): 0-2,5,6,10-12,15,16,40-42,45,46,50-52,55,56

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017\_fp\_base = 222

R620 G30 (Intel Xeon Gold 5218R)

SPECrate®2017\_fp\_peak = 228

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

## Platform Notes (Continued)

```

NUMA node1 CPU(s): 3,4,7-9,13,14,17-19,43,44,47-49,53,54,57-59
NUMA node2 CPU(s): 20-22,25,26,30-32,35,36,60-62,65,66,70-72,75,76
NUMA node3 CPU(s): 23,24,27-29,33,34,37-39,63,64,67-69,73,74,77-79
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni flush_l1d
arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 28160 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 5 6 10 11 12 15 16 40 41 42 45 46 50 51 52 55 56
node 0 size: 95092 MB
node 0 free: 82819 MB
node 1 cpus: 3 4 7 8 9 13 14 17 18 19 43 44 47 48 49 53 54 57 58 59
node 1 size: 96763 MB
node 1 free: 84989 MB
node 2 cpus: 20 21 22 25 26 30 31 32 35 36 60 61 62 65 66 70 71 72 75 76
node 2 size: 96739 MB
node 2 free: 86816 MB
node 3 cpus: 23 24 27 28 29 33 34 37 38 39 63 64 67 68 69 73 74 77 78 79
node 3 size: 96763 MB
node 3 free: 85209 MB
node distances:
node  0  1  2  3
 0:  10  11  21  21
 1:  11  10  21  21
 2:  21  21  10  11
 3:  21  21  11  10

```

```

From /proc/meminfo
MemTotal: 394608072 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```
From /etc/*release* /etc/*version*
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Nettrix

SPECrate®2017\_fp\_base = 222

## R620 G30 (Intel Xeon Gold 5218R)

SPECrate®2017\_fp\_peak = 228

**CPU2017 License:** 6138  
**Test Sponsor:** Nettrix  
**Tested by:** Nettrix

**Test Date:** Jul-2020  
**Hardware Availability:** May-2020  
**Software Availability:** Apr-2020

### Platform Notes (Continued)

os-release:

```
NAME="Red Hat Enterprise Linux"
VERSION="8.0 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.0"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.0 (Ootpa)"
ANSI_COLOR="0;31"
```

redhat-release: Red Hat Enterprise Linux release 8.0 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.0 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.0:ga

uname -a:

```
Linux localhost.localdomain 4.18.0-80.el8.x86_64 #1 SMP Wed Mar 13 12:02:46 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:         No status reported
CVE-2017-5754 (Meltdown):                 Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                              via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):        Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):        Mitigation: Enhanced IBRS, IBPB: conditional,
                                              RSB filling
```

run-level 3 Jul 11 16:28

SPEC is set to: /home/admin/benchmarks/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda5	xfs	877G	133G	744G	16%	/home

From /sys/devices/virtual/dmi/id

```
BIOS: American Megatrends Inc. NJGS041227 05/16/2020
Vendor: Nettrix
Product: R620 G30
Product Family: Rack
Serial: 302000666
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M393A2K43DB2-CWE 16 GB 2 rank 3200

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017\_fp\_base = 222

R620 G30 (Intel Xeon Gold 5218R)

SPECrate®2017\_fp\_peak = 228

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

## Platform Notes (Continued)

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
544.nab\_r(base, peak)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
-----

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017\_fp\_base = 222

R620 G30 (Intel Xeon Gold 5218R)

SPECrate®2017\_fp\_peak = 228

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

## Compiler Version Notes (Continued)

-----

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

=====  
C++, C | 511.povray\_r(peak)

-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

-----

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)

-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)

-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017\_fp\_base = 222

R620 G30 (Intel Xeon Gold 5218R)

SPECrate®2017\_fp\_peak = 228

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

## Compiler Version Notes (Continued)

64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----  
Fortran, C | 521.wrf\_r(peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----  
Fortran, C | 521.wrf\_r(peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
icc

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017\_fp\_base = 222

R620 G30 (Intel Xeon Gold 5218R)

SPECrate®2017\_fp\_peak = 228

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -qnextgen -std=c11  
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017\_fp\_base = 222

R620 G30 (Intel Xeon Gold 5218R)

SPECrate®2017\_fp\_peak = 228

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:  
icc

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017\_fp\_base = 222

R620 G30 (Intel Xeon Gold 5218R)

SPECrate®2017\_fp\_peak = 228

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

## Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -m64 -qnextgen

-Wl,-plugin-opt=-x86-branches-within-32B-boundaries

-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -L/usr/local/jemalloc64-5.0.1/lib

-ljemalloc

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017\_fp\_base = 222

R620 G30 (Intel Xeon Gold 5218R)

SPECrate®2017\_fp\_peak = 228

CPU2017 License: 6138  
Test Sponsor: Nettrix  
Tested by: Nettrix

Test Date: Jul-2020  
Hardware Availability: May-2020  
Software Availability: Apr-2020

## Peak Optimization Flags (Continued)

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

```
554.roms_r: -m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V3.0-CLX-revB.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V3.0-CLX-revB.xml>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Nettrix

SPECrate®2017\_fp\_base = 222

R620 G30 (Intel Xeon Gold 5218R)

SPECrate®2017\_fp\_peak = 228

**CPU2017 License:** 6138

**Test Sponsor:** Nettrix

**Tested by:** Nettrix

**Test Date:** Jul-2020

**Hardware Availability:** May-2020

**Software Availability:** Apr-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-07-12 21:40:46-0400.

Report generated on 2020-09-01 19:16:26 by CPU2017 PDF formatter v6255.

Originally published on 2020-09-01.