



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TOG-424RT2  
(2.60 GHz, Intel Xeon Gold 6142)

SPECspeed®2017\_fp\_base = 118

SPECspeed®2017\_fp\_peak = 120

CPU2017 License: 006042


Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Jun-2020

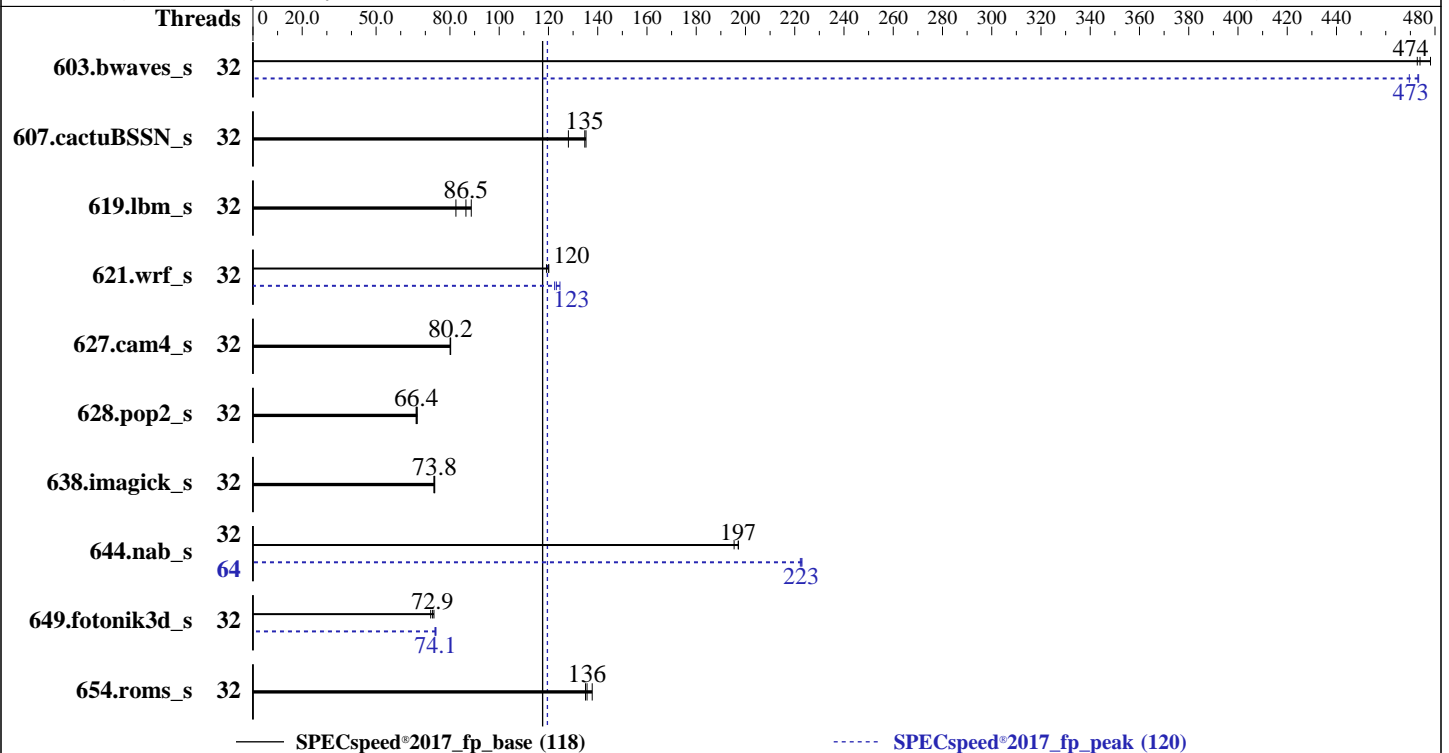

### Hardware

CPU Name: Intel Xeon Gold 6142  
 Max MHz: 3700  
 Nominal: 2600  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 (chip)s  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 22 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: CentOS Linux release 8.2.2004 (Core)  
 4.18.0-193.el8.x86\_64  
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux Build 20200306;  
 Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux Build 20200306;  
 Parallel: Yes  
 Firmware: Version 3.3 released Feb-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TOG-424RT2  
(2.60 GHz, Intel Xeon Gold 6142)

SPECSpeed®2017\_fp\_base = 118

SPECSpeed®2017\_fp\_peak = 120

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Jun-2020

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	<b>124</b>	<b>474</b>	123	478	125	473	32	126	470	125	473	<b>125</b>	<b>473</b>
607.cactuBSSN_s	32	<b>124</b>	<b>135</b>	130	128	123	135	32	<b>124</b>	<b>135</b>	130	128	123	135
619.lbm_s	32	63.6	82.4	59.1	88.7	<b>60.6</b>	<b>86.5</b>	32	63.6	82.4	59.1	88.7	<b>60.6</b>	<b>86.5</b>
621.wrf_s	32	111	119	<b>110</b>	<b>120</b>	110	120	32	<b>107</b>	<b>123</b>	108	122	106	125
627.cam4_s	32	111	80.1	<b>111</b>	<b>80.2</b>	110	80.3	32	111	80.1	<b>111</b>	<b>80.2</b>	110	80.3
628.pop2_s	32	179	66.3	<b>179</b>	<b>66.4</b>	178	66.7	32	179	66.3	<b>179</b>	<b>66.4</b>	178	66.7
638.imagick_s	32	196	73.5	196	73.8	<b>196</b>	<b>73.8</b>	32	196	73.5	196	73.8	<b>196</b>	<b>73.8</b>
644.nab_s	32	89.4	195	88.6	197	<b>88.7</b>	<b>197</b>	64	<b>78.5</b>	<b>223</b>	78.4	223	78.6	222
649.fotonik3d_s	32	124	73.5	<b>125</b>	<b>72.9</b>	126	72.2	32	123	73.9	<b>123</b>	<b>74.1</b>	123	74.3
654.roms_s	32	<b>116</b>	<b>136</b>	114	138	117	135	32	<b>116</b>	<b>136</b>	114	138	117	135

SPECSpeed®2017\_fp\_base = **118**

SPECSpeed®2017\_fp\_peak = **120**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

Binaries compiled on a system with 2x Intel Cascade Lake CPU 4214R + 384GB RAM memory using Centos 8.2 x86\_64  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the Centos 8.2 x86\_64, and the system compiler gcc 4.8.5

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**Tyrone Camarero DS400TOG-424RT2**  
(2.60 GHz, Intel Xeon Gold 6142)

SPECspeed®2017\_fp\_base = 118

SPECspeed®2017\_fp\_peak = 120

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Feb-2021  
**Hardware Availability:** Aug-2020  
**Software Availability:** Jun-2020

## General Notes (Continued)

sources available from [jemalloc.net](http://jemalloc.net) or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Power Technology = Custom  
Power Performance Tuning = BIOS Controls EPB  
ENERGY\_PERF\_BIAS\_CFG mode = Maximum Performance  
SNC = Enable  
Stale AtoS = Disable  
IMC Interleaving = 1-way Interleave  
Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c  
running on localhost.localdomain Thu Feb 18 17:23:16 2021

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6142 CPU @ 2.60GHz  
2 "physical id"s (chips)  
64 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 16  
siblings : 32  
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15  
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 64  
On-line CPU(s) list: 0-63  
Thread(s) per core: 2  
Core(s) per socket: 16  
Socket(s): 2  
NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 6142 CPU @ 2.60GHz

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero DS400TOG-424RT2**  
(2.60 GHz, Intel Xeon Gold 6142)

**SPECSpeed®2017\_fp\_base = 118**

**SPECSpeed®2017\_fp\_peak = 120**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2021

**Hardware Availability:** Aug-2020

**Software Availability:** Jun-2020

## Platform Notes (Continued)

```
Stepping: 4
CPU MHz: 3354.671
CPU max MHz: 3700.0000
CPU min MHz: 1000.0000
BogoMIPS: 5200.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 22528K
NUMA node0 CPU(s): 0-3,8-11,32-35,40-43
NUMA node1 CPU(s): 4-7,12-15,36-39,44-47
NUMA node2 CPU(s): 16-19,24-27,48-51,56-59
NUMA node3 CPU(s): 20-23,28-31,52-55,60-63
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpelt rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single pti intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke md_clear flush_l1d
```

```
/proc/cpuinfo cache data
cache size : 22528 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 8 9 10 11 32 33 34 35 40 41 42 43
node 0 size: 95354 MB
node 0 free: 82465 MB
node 1 cpus: 4 5 6 7 12 13 14 15 36 37 38 39 44 45 46 47
node 1 size: 96736 MB
node 1 free: 79484 MB
node 2 cpus: 16 17 18 19 24 25 26 27 48 49 50 51 56 57 58 59
node 2 size: 96764 MB
node 2 free: 86146 MB
node 3 cpus: 20 21 22 23 28 29 30 31 52 53 54 55 60 61 62 63
node 3 size: 96763 MB
node 3 free: 86098 MB
node distances:
node 0 1 2 3
0: 10 11 21 21
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
Tyrone Camarero DS400TOG-424RT2  
(2.60 GHz, Intel Xeon Gold 6142)

SPECspeed®2017\_fp\_base = 118  
SPECspeed®2017\_fp\_peak = 120

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Feb-2021  
**Hardware Availability:** Aug-2020  
**Software Availability:** Jun-2020

## Platform Notes (Continued)

```
1: 11 10 21 21
2: 21 21 10 11
3: 21 21 11 10
```

```
From /proc/meminfo
MemTotal: 394874028 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/sbin/tuned-adm active
Current active profile: throughput-performance
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

```
From /etc/*release* /etc/*version*
centos-release: CentOS Linux release 8.2.2004 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 8.2 (Source)
os-release:
NAME="CentOS Linux"
VERSION="8 (Core)"
ID="centos"
ID_LIKE="rhel fedora"
VERSION_ID="8"
PLATFORM_ID="platform:el8"
PRETTY_NAME="CentOS Linux 8 (Core)"
ANSI_COLOR="0;31"
redhat-release: CentOS Linux release 8.2.2004 (Core)
system-release: CentOS Linux release 8.2.2004 (Core)
system-release-cpe: cpe:/o:centos:centos:8
```

```
uname -a:
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri May 8 10:59:10 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-12207 (iTLB Multihit): KVM: Vulnerable
CVE-2018-3620 (L1 Terminal Fault): Mitigation: PTE Inversion
Microarchitectural Data Sampling: Mitigation: Clear CPU buffers; SMT
vulnerable
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swaps
barriers and __user pointer
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**Tyrone Camarero DS400TOG-424RT2**  
(2.60 GHz, Intel Xeon Gold 6142)

**SPECspeed®2017\_fp\_base = 118**  
**SPECspeed®2017\_fp\_peak = 120**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Feb-2021  
**Hardware Availability:** Aug-2020  
**Software Availability:** Jun-2020

## Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2): sanitization  
Mitigation: Full generic  
retpoline, IBPB: conditional,  
IBRS\_FW, STIBP: conditional, RSB  
filling

CVE-2020-0543 (Special Register Buffer Data Sampling): No status reported

CVE-2019-11135 (TSX Asynchronous Abort): Mitigation: Clear CPU buffers; SMT  
vulnerable

run-level 3 Feb 17 10:38

SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/cl-home xfs 392G 145G 248G 37% /home

From /sys/devices/virtual/dmi/id  
Vendor: Tyrone Systems  
Product: Tyrone Camarero DS400TOG-424RT2  
Product Family: SMC X11  
Serial: A309085X0907231

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
12x NO DIMM NO DIMM  
12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2666

BIOS:  
BIOS Vendor: American Megatrends Inc.  
BIOS Version: 3.3  
BIOS Date: 02/21/2020  
BIOS Revision: 5.14

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
| 644.nab\_s(base, peak)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**Tyrone Camarero DS400TOG-424RT2**  
(2.60 GHz, Intel Xeon Gold 6142)

SPECspeed®2017\_fp\_base = 118

SPECspeed®2017\_fp\_peak = 120

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Feb-2021  
**Hardware Availability:** Aug-2020  
**Software Availability:** Jun-2020

## Compiler Version Notes (Continued)

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
icc

Fortran benchmarks:  
ifort

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TOG-424RT2  
(2.60 GHz, Intel Xeon Gold 6142)

SPECspeed®2017\_fp\_base = 118

SPECspeed®2017\_fp\_peak = 120

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2021

**Hardware Availability:** Aug-2020

**Software Availability:** Jun-2020

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**Tyrone Camarero DS400TOG-424RT2**  
(2.60 GHz, Intel Xeon Gold 6142)

SPECspeed®2017\_fp\_base = 118

SPECspeed®2017\_fp\_peak = 120

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Feb-2021  
**Hardware Availability:** Aug-2020  
**Software Availability:** Jun-2020

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-DSPEC\_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Peak Compiler Invocation

C benchmarks:  
icc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
ifort icc

Benchmarks using Fortran, C, and C++:  
icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP  
-mbranches-within-32B-boundaries  
-L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

603.bwaves\_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)  
-DSPEC\_SUPPRESS\_OPENMP -DSPEC\_OPENMP -ipo -xCORE-AVX512

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**  
 (Test Sponsor: Netweb Pte Ltd)  
**Tyrone Camarero DS400TOG-424RT2**  
 (2.60 GHz, Intel Xeon Gold 6142)

**SPECspeed®2017\_fp\_base = 118**  
**SPECspeed®2017\_fp\_peak = 120**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Feb-2021  
**Hardware Availability:** Aug-2020  
**Software Availability:** Jun-2020

## Peak Optimization Flags (Continued)

603.bwaves\_s (continued):

```
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

649.fotonik3d\_s: Same as 603.bwaves\_s

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)
-prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revB.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revB.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.5 on 2021-02-18 06:53:16-0500.  
 Report generated on 2021-03-16 15:25:37 by CPU2017 PDF formatter v6255.  
 Originally published on 2021-03-16.