



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge MX750c (Intel Xeon Platinum 8358, 2.60 GHz)

SPECrate®2017\_int\_base = 468

SPECrate®2017\_int\_peak = 486

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Apr-2021

Software Availability: Feb-2021

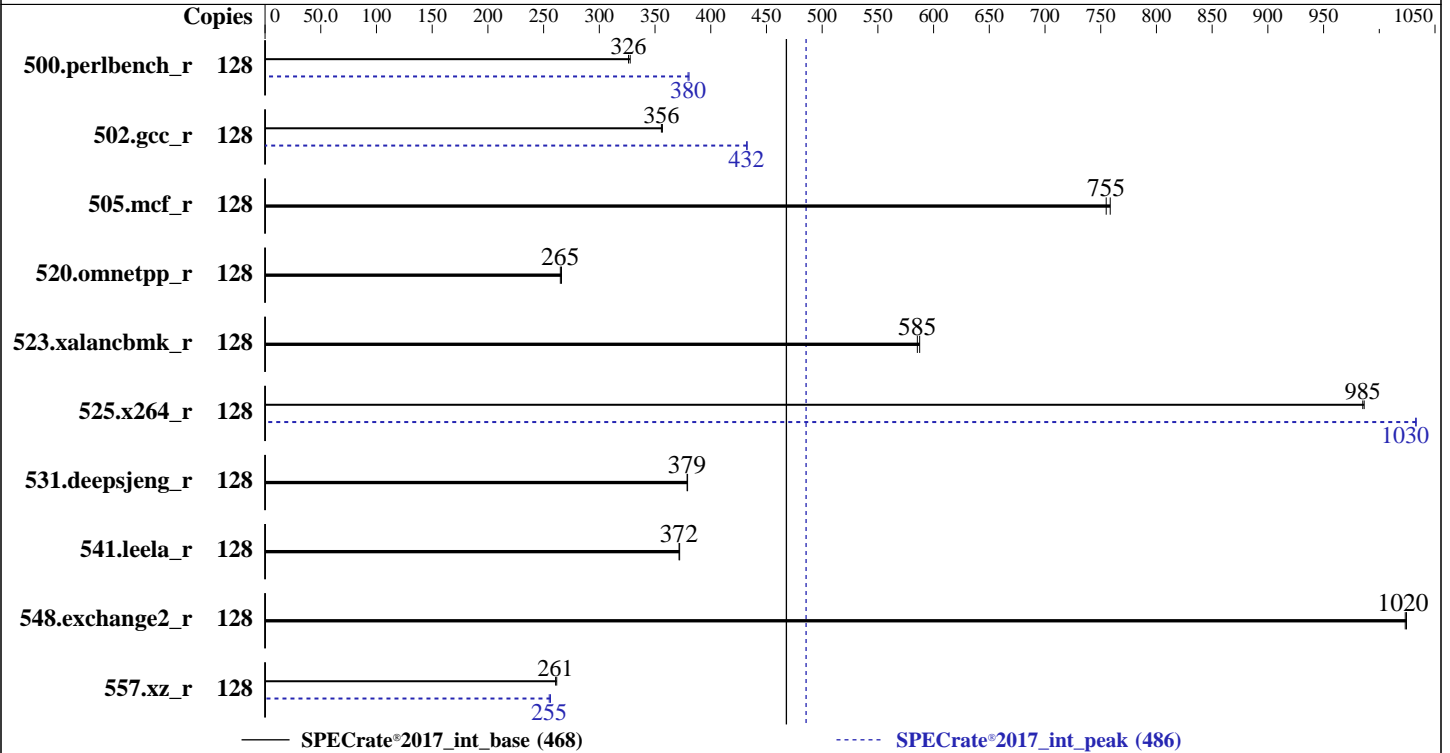

### Hardware

CPU Name: Intel Xeon Platinum 8358  
 Max MHz: 3400  
 Nominal: 2600  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 48 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R)  
 Storage: 125 GB on tmpfs  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.2 (Ootpa)  
 4.18.0-193.el8.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++  
 Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler  
 Classic Build 20201112 for Linux;  
 C/C++: Version 2021.1 of Intel C/C++ Compiler  
 Classic Build 20201112 for Linux  
 Parallel: No  
 Firmware: Version 1.1.0 released Mar-2021  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance  
 at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge MX750c (Intel Xeon Platinum 8358, 2.60 GHz)

SPECrate®2017\_int\_base = 468

SPECrate®2017\_int\_peak = 486

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2021  
Hardware Availability: Apr-2021  
Software Availability: Feb-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	622	328	<b><u>625</u></b>	<b><u>326</u></b>			128	<b><u>537</u></b>	<b><u>380</u></b>	535	381		
502.gcc_r	128	<b><u>510</u></b>	<b><u>356</u></b>	508	357			128	<b><u>419</u></b>	<b><u>432</u></b>	419	433		
505.mcf_r	128	273	759	<b><u>274</u></b>	<b><u>755</u></b>			128	273	759	<b><u>274</u></b>	<b><u>755</u></b>		
520.omnetpp_r	128	<b><u>634</u></b>	<b><u>265</u></b>	631	266			128	<b><u>634</u></b>	<b><u>265</u></b>	631	266		
523.xalancbmk_r	128	<b><u>231</u></b>	<b><u>585</u></b>	230	587			128	<b><u>231</u></b>	<b><u>585</u></b>	230	587		
525.x264_r	128	227	986	<b><u>228</u></b>	<b><u>985</u></b>			128	217	1030	<b><u>217</u></b>	<b><u>1030</u></b>		
531.deepsjeng_r	128	<b><u>387</u></b>	<b><u>379</u></b>	387	379			128	<b><u>387</u></b>	<b><u>379</u></b>	387	379		
541.leela_r	128	<b><u>571</u></b>	<b><u>372</u></b>	570	372			128	<b><u>571</u></b>	<b><u>372</u></b>	570	372		
548.exchange2_r	128	<b><u>328</u></b>	<b><u>1020</u></b>	327	1020			128	<b><u>328</u></b>	<b><u>1020</u></b>	327	1020		
557.xz_r	128	528	262	<b><u>530</u></b>	<b><u>261</u></b>			128	540	256	<b><u>542</u></b>	<b><u>255</u></b>		

SPECrate®2017\_int\_base = 468

SPECrate®2017\_int\_peak = 486

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/mnt/ramdisk/cpu2017-1.1.7-ic2021.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.7-ic2021.1/lib/ia32:/mnt/ramdisk/cpu2017-1.1.7-ic2021.1/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge MX750c (Intel Xeon Platinum 8358, 2.60 GHz)

SPECrate®2017\_int\_base = 468

SPECrate®2017\_int\_peak = 486

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Apr-2021

**Hardware Availability:** Apr-2021

**Software Availability:** Feb-2021

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default  
Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS Settings:

Sub NUMA Cluster : 2-Way Clustering

Virtualization Technology : Disabled

System Profile : Custom

CPU Power Management : Maximum Performance

C1E : Disabled

C States : Autonomous

Memory Patrol Scrub : Disabled

Energy Efficiency Policy : Performance

CPU Interconnect Bus Link

Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.7-ic2021.1/bin/sysinfo

Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c

running on localhost.localdomain Sat Apr 3 18:36:44 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8358 CPU @ 2.60GHz

2 "physical id"s (chips)

128 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge MX750c (Intel Xeon Platinum 8358, 2.60 GHz)

SPECrate®2017\_int\_base = 468

SPECrate®2017\_int\_peak = 486

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Apr-2021

Software Availability: Feb-2021

### Platform Notes (Continued)

```

cpu cores : 32
siblings  : 64
physical 0: cores 0 1 2 3 4 5 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
            28 29 30 31
physical 1: cores 0 1 2 3 4 5 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
            28 29 30 31

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
NUMA node(s):          4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  106
Model name:             Intel(R) Xeon(R) Platinum 8358 CPU @ 2.60GHz
Stepping:               6
CPU MHz:                1874.653
BogoMIPS:               5200.00
Virtualization:        VT-x
L1d cache:              48K
L1i cache:              32K
L2 cache:               1280K
L3 cache:               49152K
NUMA node0 CPU(s):     0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92,96,100,104,108,
                        112,116,120,124
NUMA node1 CPU(s):     2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94,98,102,106,110,
                        114,118,122,126
NUMA node2 CPU(s):     1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,101,105,109,
                        113,117,121,125
NUMA node3 CPU(s):     3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95,99,103,107,111,
                        115,119,123,127
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                        pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpelt rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
                        aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                        xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
                        avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge MX750c (Intel Xeon Platinum 8358, 2.60 GHz)

SPECrate®2017\_int\_base = 468

SPECrate®2017\_int\_peak = 486

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Apr-2021

Software Availability: Feb-2021

## Platform Notes (Continued)

```

mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid md_clear pconfig flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 49152 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96
100 104 108 112 116 120 124
node 0 size: 257436 MB
node 0 free: 257013 MB
node 1 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78 82 86 90 94 98
102 106 110 114 118 122 126
node 1 size: 258040 MB
node 1 free: 257810 MB
node 2 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77 81 85 89 93 97
101 105 109 113 117 121 125
node 2 size: 258013 MB
node 2 free: 248425 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79 83 87 91 95 99
103 107 111 115 119 123 127
node 3 size: 258038 MB
node 3 free: 257804 MB
node distances:
node 0 1 2 3
0: 10 11 20 20
1: 11 10 20 20
2: 20 20 10 11
3: 20 20 11 10

```

```

From /proc/meminfo
MemTotal: 1056285452 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

/sbin/tuned-adm active
Current active profile: throughput-performance

```

```

From /etc/*release* /etc/*version*
os-release:

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge MX750c (Intel Xeon Platinum 8358, 2.60 GHz)

SPECrate®2017\_int\_base = 468

SPECrate®2017\_int\_peak = 486

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: Apr-2021

Software Availability: Feb-2021

### Platform Notes (Continued)

```

NAME="Red Hat Enterprise Linux"
VERSION="8.2 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.2"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
ANSI_COLOR="0;31"

```

```

redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

```

uname -a:

```

Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	No status reported
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Apr 3 18:34

```

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.7-ic2021.1
Filesystem      Type      Size  Used Avail Use% Mounted on
tmpfs            tmpfs    125G   4.4G  121G   4% /mnt/ramdisk

```

```

From /sys/devices/virtual/dmi/id
Vendor:          Dell Inc.
Product:         PowerEdge MX750c
Product Family: PowerEdge
Serial:          1234567

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge MX750c (Intel Xeon Platinum 8358, 2.60 GHz)

SPECrate®2017\_int\_base = 468

SPECrate®2017\_int\_peak = 486

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Apr-2021

**Hardware Availability:** Apr-2021

**Software Availability:** Feb-2021

## Platform Notes (Continued)

hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

15x 00AD063200AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200

17x 00AD063200AD HMAA4GR7AJR8N-XN 32 GB 2 rank 3200

BIOS:

BIOS Vendor: Dell Inc.

BIOS Version: 1.1.0

BIOS Date: 03/25/2021

BIOS Revision: 1.1

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 500.perlbench\_r(peak) 557.xz\_r(peak)

-----  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(peak) 557.xz\_r(peak)

-----  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge MX750c (Intel Xeon Platinum 8358, 2.60 GHz)

SPECrate®2017\_int\_base = 468

SPECrate®2017\_int\_peak = 486

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Apr-2021  
**Hardware Availability:** Apr-2021  
**Software Availability:** Feb-2021

## Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(peak) 557.xz\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak)  
-----

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge MX750c (Intel Xeon Platinum 8358, 2.60 GHz)

SPECrate®2017\_int\_base = 468

SPECrate®2017\_int\_peak = 486

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Apr-2021

**Hardware Availability:** Apr-2021

**Software Availability:** Feb-2021

## Compiler Version Notes (Continued)

| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 548.exchange2\_r(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge MX750c (Intel Xeon Platinum 8358, 2.60 GHz)

SPECrate®2017\_int\_base = 468

SPECrate®2017\_int\_peak = 486

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Apr-2021

**Hardware Availability:** Apr-2021

**Software Availability:** Feb-2021

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

icx

500.perlbench\_r: icc

557.xz\_r: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

505.mcf\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge MX750c (Intel Xeon Platinum 8358, 2.60 GHz)

SPECrate®2017\_int\_base = 468

SPECrate®2017\_int\_peak = 486

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Apr-2021

**Hardware Availability:** Apr-2021

**Software Availability:** Feb-2021

## Peak Portability Flags (Continued)

```
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmallo
```

```
502.gcc_r: -m32
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc32-5.0.1/lib -ljemallo
```

```
505.mcf_r: basepeak = yes
```

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmallo
```

```
557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmallo
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge MX750c (Intel Xeon Platinum 8358, 2.60 GHz)

SPECrate®2017\_int\_base = 468

SPECrate®2017\_int\_peak = 486

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Apr-2021

**Hardware Availability:** Apr-2021

**Software Availability:** Feb-2021

## Peak Optimization Flags (Continued)

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.0.2021-05-18.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.0.2021-05-18.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.7 on 2021-04-03 19:36:42-0400.

Report generated on 2021-05-18 19:35:36 by CPU2017 PDF formatter v6442.

Originally published on 2021-05-18.