



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 305

SPECrate®2017_fp_peak = 328

PowerEdge R7515 (AMD EPYC 7713P 64-Core Processor)

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

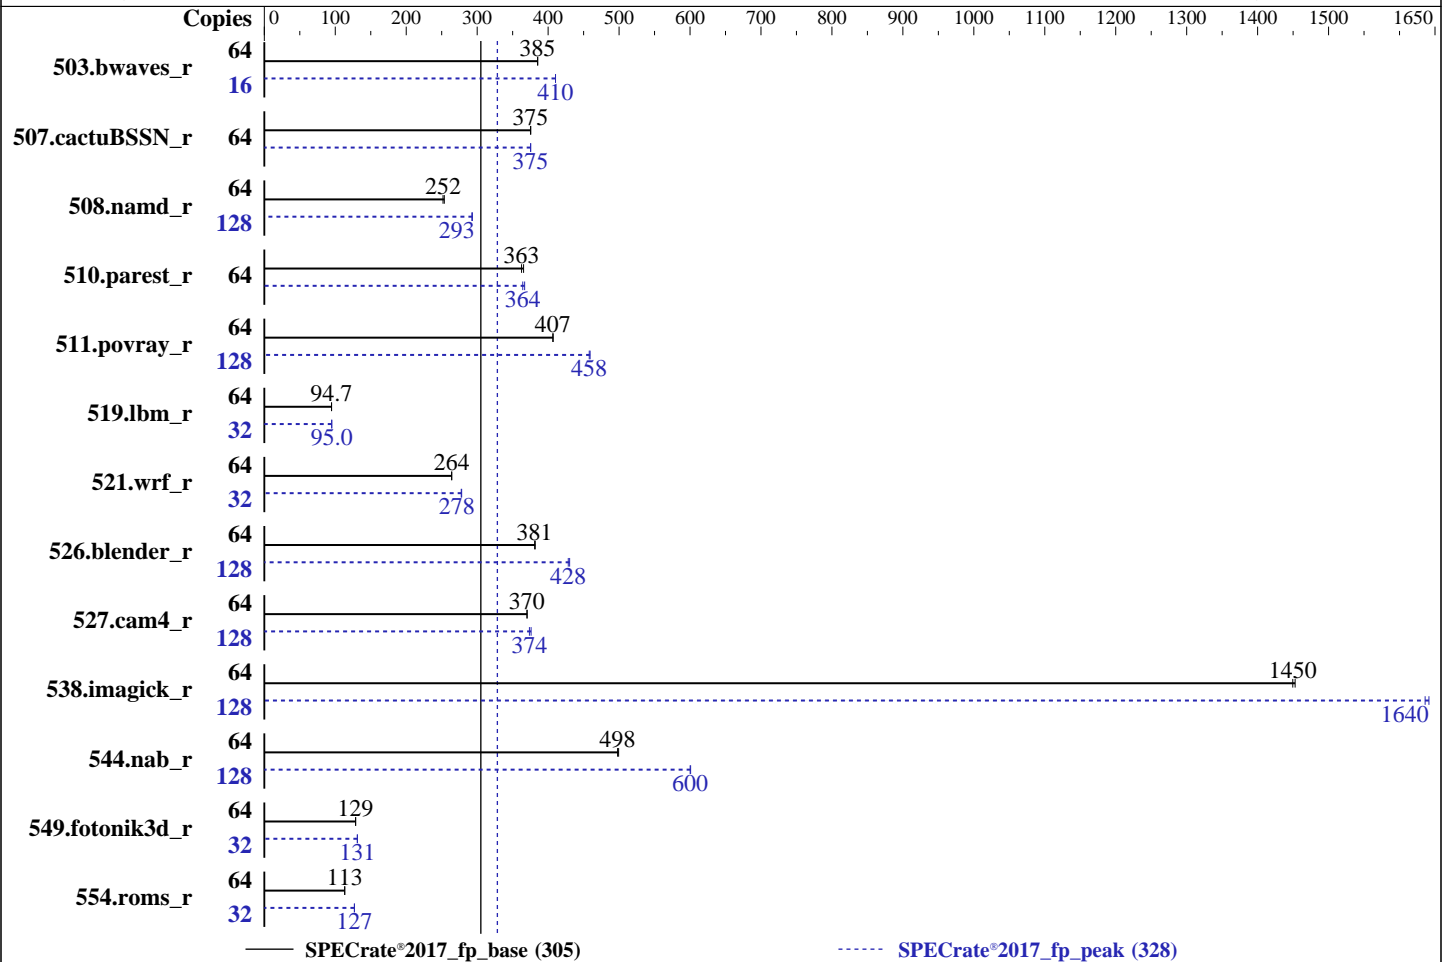

Hardware

CPU Name: AMD EPYC 7713P
 Max MHz: 3675
 Nominal: 2000
 Enabled: 64 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 1 TB (8 x 128 GB 4Rx4 PC4-3200AA-L)
 Storage: 125 GB on tmpfs
 Other: None

Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)
 4.18.0-240.22.1.el8_3.x86_64
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
 Parallel: No
 Firmware: Version 2.2.4 released Apr-2021
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 305

SPECrate®2017_fp_peak = 328

PowerEdge R7515 (AMD EPYC 7713P 64-Core Processor)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Results Table

Benchmark	Base						Peak					
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	1666	385	<u>1666</u>	<u>385</u>			16	391	410	<u>391</u>	<u>410</u>
507.cactuBSSN_r	64	<u>216</u>	<u>375</u>	216	376			64	216	375	<u>216</u>	<u>375</u>
508.namd_r	64	<u>241</u>	<u>252</u>	240	254			128	415	293	<u>416</u>	<u>293</u>
510.parest_r	64	458	365	<u>462</u>	<u>363</u>			64	<u>460</u>	<u>364</u>	456	367
511.povray_r	64	<u>368</u>	<u>407</u>	367	407			128	<u>653</u>	<u>458</u>	651	459
519.lbm_r	64	712	94.8	<u>712</u>	<u>94.7</u>			32	355	95.0	<u>355</u>	<u>95.0</u>
521.wrf_r	64	<u>543</u>	<u>264</u>	543	264			32	<u>258</u>	<u>278</u>	258	278
526.blender_r	64	<u>256</u>	<u>381</u>	255	382			128	<u>455</u>	<u>428</u>	453	430
527.cam4_r	64	302	370	<u>302</u>	<u>370</u>			128	595	376	<u>599</u>	<u>374</u>
538.imagick_r	64	<u>110</u>	<u>1450</u>	110	1450			128	194	1640	<u>195</u>	<u>1640</u>
544.nab_r	64	216	499	<u>216</u>	<u>498</u>			128	359	601	<u>359</u>	<u>600</u>
549.fotonik3d_r	64	1938	129	<u>1938</u>	<u>129</u>			32	951	131	<u>951</u>	<u>131</u>
554.roms_r	64	<u>898</u>	<u>113</u>	897	113			32	<u>401</u>	<u>127</u>	400	127

SPECrate®2017_fp_base = **305**

SPECrate®2017_fp_peak = **328**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory and avoid remote memory usage.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 305

PowerEdge R7515 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_fp_peak = 328

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Operating System Notes (Continued)

'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout randomization (ASLR) to reduce run-to-run variability.

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root for peak integer runs and all FP runs to enable Transparent Hugepages (THP).
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for base integer runs to enable THP only on request.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/mnt/ramdisk/cpu2017-1.1.7-aocc300/amd_rate_aocc300_milan_A_lib/64:/mnt  
    /ramdisk/cpu2017-1.1.7-aocc300/amd_rate_aocc300_milan_A_lib/32:"  
MALLOCONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 512GiB Memory using OpenSUSE 15.2

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:
NUMA Nodes per Socket : 4
L3 Cache as NUMA Domain : Enabled
Virtualization Technology : Disabled

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 305

SPECrate®2017_fp_peak = 328

PowerEdge R7515 (AMD EPYC 7713P 64-Core Processor)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Platform Notes (Continued)

DRAM Refresh Delay : Performance
 System Profile : Custom
 CPU Power Management : Maximum Performance
 Memory Patrol Scrub : Disabled
 PCI ASPM L1 Link
 Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.7-aocc300/bin/sysinfo
 Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
 running on rhel-8-3-amd Mon May 3 18:14:42 2021

SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
 model name : AMD EPYC 7713P 64-Core Processor
 1 "physical id"s (chips)
 128 "processors"
 cores, siblings (Caution: counting these is hw and system dependent. The following
 excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
 cpu cores : 64
 siblings : 128
 physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
 53 54 55 56 57 58 59 60 61 62 63

From lscpu:
 Architecture: x86_64
 CPU op-mode(s): 32-bit, 64-bit
 Byte Order: Little Endian
 CPU(s): 128
 On-line CPU(s) list: 0-127
 Thread(s) per core: 2
 Core(s) per socket: 64
 Socket(s): 1
 NUMA node(s): 8
 Vendor ID: AuthenticAMD
 CPU family: 25
 Model: 1
 Model name: AMD EPYC 7713P 64-Core Processor
 Stepping: 1
 CPU MHz: 2307.558
 BogoMIPS: 3992.32
 Virtualization: AMD-V
 L1d cache: 32K
 L1i cache: 32K

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 305

PowerEdge R7515 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_fp_peak = 328

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Platform Notes (Continued)

```

L2 cache:          512K
L3 cache:          32768K
NUMA node0 CPU(s): 0-7,64-71
NUMA node1 CPU(s): 8-15,72-79
NUMA node2 CPU(s): 16-23,80-87
NUMA node3 CPU(s): 24-31,88-95
NUMA node4 CPU(s): 32-39,96-103
NUMA node5 CPU(s): 40-47,104-111
NUMA node6 CPU(s): 48-55,112-119
NUMA node7 CPU(s): 56-63,120-127
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall
fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb
sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
node 0 size: 128345 MB
node 0 free: 128215 MB
node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
node 1 size: 128848 MB
node 1 free: 128803 MB
node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
node 2 size: 128920 MB
node 2 free: 128822 MB
node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
node 3 size: 128908 MB
node 3 free: 128807 MB
node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
node 4 size: 128914 MB
node 4 free: 128587 MB
node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
node 5 size: 128910 MB
node 5 free: 124978 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 305

SPECrate®2017_fp_peak = 328

PowerEdge R7515 (AMD EPYC 7713P 64-Core Processor)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Platform Notes (Continued)

```

node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
node 6 size: 128918 MB
node 6 free: 128794 MB
node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
node 7 size: 128898 MB
node 7 free: 128716 MB
node distances:
node  0  1  2  3  4  5  6  7
 0: 10 11 12 12 12 12 12 12
 1: 11 10 12 12 12 12 12 12
 2: 12 12 10 11 12 12 12 12
 3: 12 12 11 10 12 12 12 12
 4: 12 12 12 12 10 11 12 12
 5: 12 12 12 12 11 10 12 12
 6: 12 12 12 12 12 12 10 11
 7: 12 12 12 12 12 12 11 10

```

From /proc/meminfo

MemTotal: 1056300604 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: throughput-performance

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.3 (Ootpa)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="8.3"

PLATFORM_ID="platform:el8"

PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"

ANSI_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

uname -a:

Linux rhel-8-3-amd 4.18.0-240.22.1.el8_3.x86_64 #1 SMP Thu Mar 25 14:36:04 EDT 2021
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 305

PowerEdge R7515 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_fp_peak = 328

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Platform Notes (Continued)

Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Nov 25 11:40

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.7-aocc300

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	125G	3.7G	122G	3%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id

```
Vendor:      Dell Inc.
Product:     PowerEdge R7515
Product Family: PowerEdge
Serial:      5MGPH13
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
8x 80CE80B380CE M386AAG40AM3-CWE 128 GB 4 rank 3200
8x Not Specified Not Specified
```

BIOS:

```
BIOS Vendor:      Dell Inc.
BIOS Version:     2.2.4
BIOS Date:        04/12/2021
BIOS Revision:    2.2
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 305

PowerEdge R7515 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_fp_peak = 328

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Compiler Version Notes (Continued)

| 544.nab_r(base, peak)

```
-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----
```

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

```
=====
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----
```

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

```
-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----
```

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

```
=====
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 305

PowerEdge R7515 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_fp_peak = 328

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Compiler Version Notes (Continued)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
| 554.roms_r(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 305

PowerEdge R7515 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_fp_peak = 328

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-landlibm -ljemalloc -lflang -lflangrti

C++ benchmarks:

-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 305

PowerEdge R7515 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_fp_peak = 328

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -lamdlibm -ljemalloc
-lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Kieee -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 305

PowerEdge R7515 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_fp_peak = 328

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Kieee -Mrecursive -mllvm -fuse-tile-inner-loop
-funroll-loops -mllvm -lsr-in-nested-loop -z muldefs -lamdlibm
-ljemalloc -lflang -lflangrti
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 305

PowerEdge R7515 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_fp_peak = 328

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Base Other Flags (Continued)

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 305

SPECrate®2017_fp_peak = 328

PowerEdge R7515 (AMD EPYC 7713P 64-Core Processor)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

519.lbm_r (continued):

```
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

538.imagick_r: Same as 519.lbm_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3  
-fveclib=AMDLIBM -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays  
-flv-function-specialization -mllvm -inline-threshold=1000  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

C++ benchmarks:

```
508.namd_r: -m64 -std=c++98 -mno-adx -mno-sse4a  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -finline-aggressive  
-mllvm -unroll-threshold=100 -flv-function-specialization  
-mllvm -enable-licm-vrp -mllvm -reroll-loops  
-mllvm -aggressive-loop-unswitch  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

```
510.parest_r: -m64 -std=c++98 -mno-adx -mno-sse4a  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-suppress-fmas  
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3  
-fveclib=AMDLIBM -finline-aggressive  
-mllvm -unroll-threshold=100 -flv-function-specialization  
-mllvm -enable-licm-vrp -mllvm -reroll-loops  
-mllvm -aggressive-loop-unswitch  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

Fortran benchmarks:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 305

PowerEdge R7515 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_fp_peak = 328

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-lamdlibm -ljemalloc -lflang -lflangrti
```

549.fotonik3d_r: Same as 503.bwaves_r

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-Hz,1,0x1 -mllvm -fuse-tile-inner-loop -lamdlibm
-ljemalloc -lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Kieee -Mrecursive
-lamdlibm -ljemalloc -lflang -lflangrti
```

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-force-vector-interleave=1 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 305

PowerEdge R7515 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_fp_peak = 328

CPU2017 License: 55

Test Date: May-2021

Test Sponsor: Dell Inc.

Hardware Availability: Jun-2021

Tested by: Dell Inc.

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

527.cam4_r (continued):

```
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -O3 -ffast-math
-funroll-loops -mllvm -extra-vectorizer-passes
-mllvm -lsr-in-nested-loop -Mrecursive -lamdlibm
-ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -lamdlibm -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Kieee -Mrecursive -lamdlibm
-ljemalloc -lflang -lflangrti
```

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 305

PowerEdge R7515 (AMD EPYC 7713P 64-Core Processor)

SPECrate®2017_fp_peak = 328

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

Peak Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.7 on 2021-05-03 19:14:41-0400.

Report generated on 2021-05-27 11:07:54 by CPU2017 PDF formatter v6442.

Originally published on 2021-05-25.