



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.80 GHz, AMD EPYC 7543P

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = 269

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

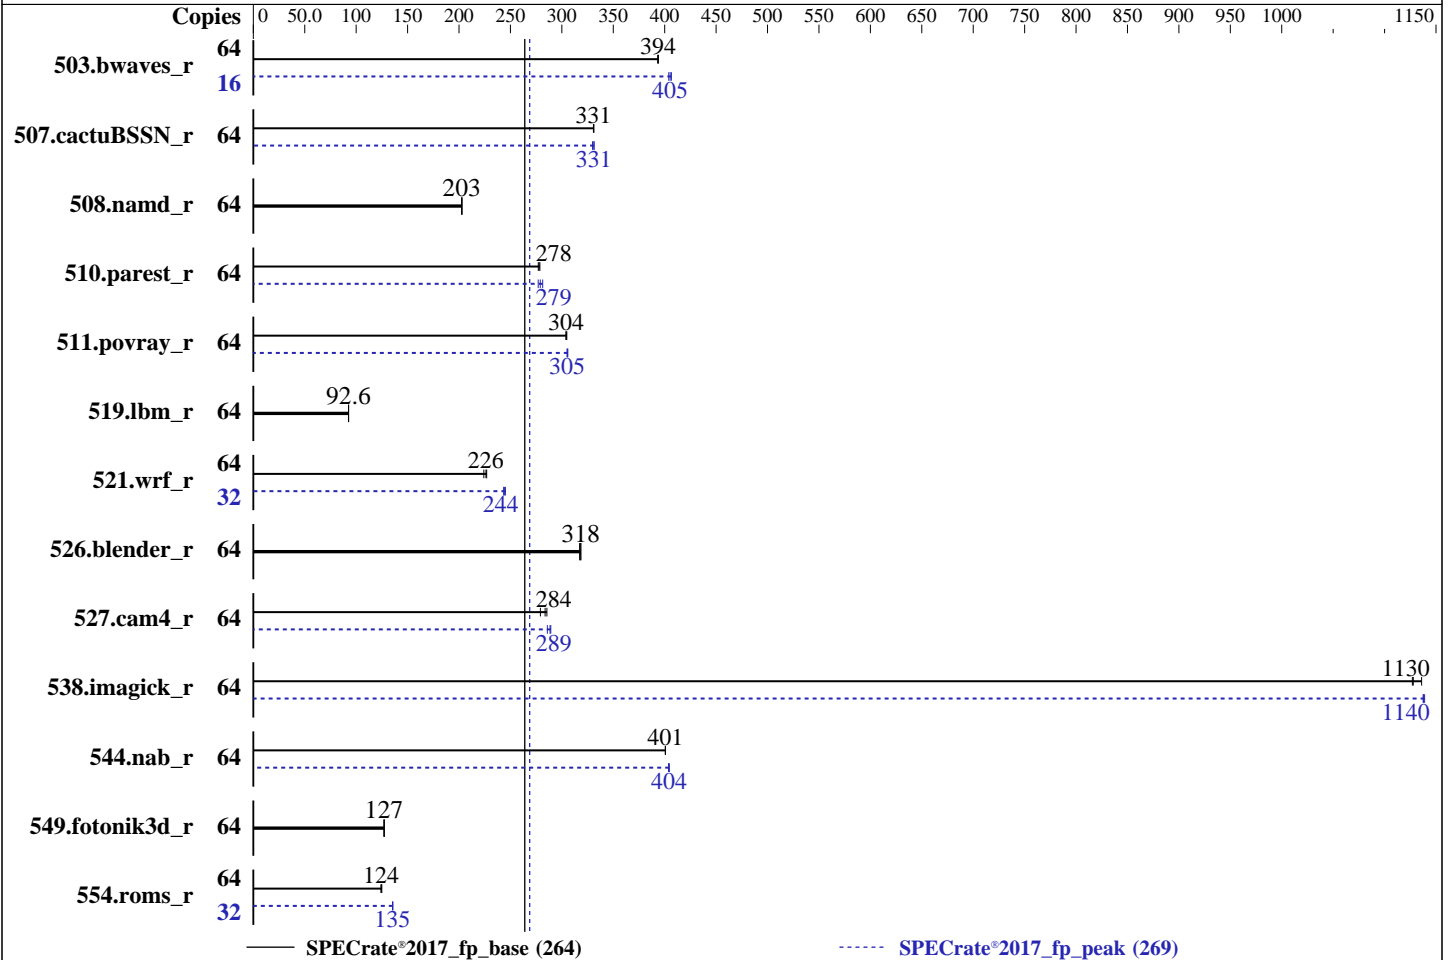

### Hardware

CPU Name: AMD EPYC 7543P  
 Max MHz: 3700  
 Nominal: 2800  
 Enabled: 32 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 4 cores  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP2 (x86\_64)  
 Kernel 5.3.18-22-default  
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC  
 Parallel: No  
 Firmware: Lenovo BIOS Version CFE125U 6.0 released May-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.80 GHz, AMD EPYC 7543P

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = 269

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio		
503.bwaves_r	64	1629	394	<b><u>1631</u></b>	<b><u>394</u></b>	1632	393	16	395	407	<b><u>396</u></b>	<b><u>405</u></b>	397	404
507.cactuBSSN_r	64	245	331	<b><u>245</u></b>	<b><u>331</u></b>	245	331	64	<b><u>245</u></b>	<b><u>331</u></b>	245	331	246	330
508.namd_r	64	300	203	300	203	<b><u>300</u></b>	<b><u>203</u></b>	64	300	203	300	203	<b><u>300</u></b>	<b><u>203</u></b>
510.parest_r	64	604	277	601	279	<b><u>603</u></b>	<b><u>278</u></b>	64	<b><u>600</u></b>	<b><u>279</u></b>	595	281	604	277
511.povray_r	64	492	304	<b><u>491</u></b>	<b><u>304</u></b>	490	305	64	490	305	489	306	<b><u>490</u></b>	<b><u>305</u></b>
519.lbm_r	64	729	92.5	728	92.7	<b><u>729</u></b>	<b><u>92.6</u></b>	64	729	92.5	728	92.7	<b><u>729</u></b>	<b><u>92.6</u></b>
521.wrf_r	64	<b><u>634</u></b>	<b><u>226</u></b>	640	224	632	227	32	<b><u>294</u></b>	<b><u>244</u></b>	295	243	292	245
526.blender_r	64	306	318	307	317	<b><u>306</u></b>	<b><u>318</u></b>	64	306	318	307	317	<b><u>306</u></b>	<b><u>318</u></b>
527.cam4_r	64	392	285	<b><u>395</u></b>	<b><u>284</u></b>	401	279	64	<b><u>388</u></b>	<b><u>289</u></b>	387	289	392	286
538.imagick_r	64	141	1130	<b><u>141</u></b>	<b><u>1130</u></b>	140	1140	64	<b><u>140</u></b>	<b><u>1140</u></b>	140	1140	140	1140
544.nab_r	64	<b><u>269</u></b>	<b><u>401</u></b>	269	401	269	401	64	<b><u>266</u></b>	<b><u>404</u></b>	267	404	266	404
549.fotonik3d_r	64	1959	127	<b><u>1962</u></b>	<b><u>127</u></b>	1962	127	64	1959	127	<b><u>1962</u></b>	<b><u>127</u></b>	1962	127
554.roms_r	64	819	124	<b><u>818</u></b>	<b><u>124</u></b>	814	125	32	375	135	<b><u>375</u></b>	<b><u>135</u></b>	375	136

SPECrate®2017\_fp\_base = **264**

SPECrate®2017\_fp\_peak = **269**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655  
2.80 GHz, AMD EPYC 7543P

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = 269

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Operating System Notes (Continued)

randomization (ASLR) to reduce run-to-run variability.  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root for peak integer runs and all FP runs to enable Transparent Hugepages (THP).  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root for base integer runs to enable THP only on request.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017-1.1.8-amd-aocc300-milan-A1/amd\_rate\_aocc300\_milan\_A\_lib/6  
4:/home/cpu2017-1.1.8-amd-aocc300-milan-A1/amd\_rate\_aocc300\_milan\_A\_lib/  
32:"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 512GiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

NUMA nodes per socket set to NPS4

LLC as NUMA Node set to Enabled

Memory interleaving set to Disabled

L1 Stream HW Prefetcher set to Disable

Sysinfo program /home/cpu2017-1.1.8-amd-aocc300-milan-A1/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost Fri Apr 17 21:15:46 2020

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.80 GHz, AMD EPYC 7543P

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = 269

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

### Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7543P 32-Core Processor
 1 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
```

From lscpu from util-linux 2.33.1:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 64
On-line CPU(s) list: 0-63
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 1
NUMA node(s): 8
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 7543P 32-Core Processor
Stepping: 1
CPU MHz: 1796.155
CPU max MHz: 2800.0000
CPU min MHz: 1500.0000
BogoMIPS: 5589.24
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 32768K
NUMA node0 CPU(s): 0-3,32-35
NUMA node1 CPU(s): 4-7,36-39
NUMA node2 CPU(s): 8-11,40-43
NUMA node3 CPU(s): 12-15,44-47
NUMA node4 CPU(s): 16-19,48-51
NUMA node5 CPU(s): 20-23,52-55
NUMA node6 CPU(s): 24-27,56-59
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.80 GHz, AMD EPYC 7543P

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = 269

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

### Platform Notes (Continued)

```

NUMA node7 CPU(s): 28-31,60-63
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase
bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif
umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 32 33 34 35
node 0 size: 32068 MB
node 0 free: 31874 MB
node 1 cpus: 4 5 6 7 36 37 38 39
node 1 size: 32251 MB
node 1 free: 32048 MB
node 2 cpus: 8 9 10 11 40 41 42 43
node 2 size: 32253 MB
node 2 free: 32136 MB
node 3 cpus: 12 13 14 15 44 45 46 47
node 3 size: 32251 MB
node 3 free: 32131 MB
node 4 cpus: 16 17 18 19 48 49 50 51
node 4 size: 32220 MB
node 4 free: 32092 MB
node 5 cpus: 20 21 22 23 52 53 54 55
node 5 size: 32251 MB
node 5 free: 32136 MB
node 6 cpus: 24 25 26 27 56 57 58 59
node 6 size: 32253 MB
node 6 free: 32095 MB
node 7 cpus: 28 29 30 31 60 61 62 63
node 7 size: 32240 MB
node 7 free: 32113 MB
node distances:
node  0  1  2  3  4  5  6  7
 0: 10 11 12 12 12 12 12 12

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.80 GHz, AMD EPYC 7543P

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = 269

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

### Platform Notes (Continued)

1:	11	10	12	12	12	12	12	12
2:	12	12	10	11	12	12	12	12
3:	12	12	11	10	12	12	12	12
4:	12	12	12	12	10	11	12	12
5:	12	12	12	12	11	10	12	12
6:	12	12	12	12	12	12	10	11
7:	12	12	12	12	12	12	11	10

From /proc/meminfo

MemTotal: 263978836 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

/usr/bin/lsb\_release -d  
SUSE Linux Enterprise Server 15 SP2

From /etc/\*release\* /etc/\*version\*

os-release:  
NAME="SLES"  
VERSION="15-SP2"  
VERSION\_ID="15.2"  
PRETTY\_NAME="SUSE Linux Enterprise Server 15 SP2"  
ID="sles"  
ID\_LIKE="suse"  
ANSI\_COLOR="0;32"  
CPE\_NAME="cpe:/o:suse:sles:15:sp2"

uname -a:

Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline,

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.80 GHz, AMD EPYC 7543P

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = 269

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

### Platform Notes (Continued)

IBPB: conditional, IBRS\_FW, STIBP:  
always-on, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Apr 17 21:13

SPEC is set to: /home/cpu2017-1.1.8-amd-aocc300-milan-A1  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/md126p3 xfs 892G 81G 811G 10% /

From /sys/devices/virtual/dmi/id  
Vendor: Lenovo  
Product: ThinkSystem SR655 -[7Y00000000]-  
Product Family: ThinkSystem  
Serial: 0123456789

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
8x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200  
8x Unknown Unknown

BIOS:  
BIOS Vendor: Lenovo  
BIOS Version: CFE125U  
BIOS Date: 05/28/2021  
BIOS Revision: 6.0

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
-----
```

```
AMD clang version 12.0.0 (CLANG: AOC3_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.80 GHz, AMD EPYC 7543P

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = 269

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

### Compiler Version Notes (Continued)

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
-----

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
-----

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
-----

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.80 GHz, AMD EPYC 7543P

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = 269

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

### Compiler Version Notes (Continued)

| 554.roms\_r(base, peak)

-----  
AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
-----

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

### Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

Benchmarks using both Fortran and C:  
flang clang

Benchmarks using both C and C++:  
clang++ clang

Benchmarks using Fortran, C, and C++:  
clang++ clang flang



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.80 GHz, AMD EPYC 7543P

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = 269

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Mar-2021

## Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti

```

C++ benchmarks:

```

-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti

```

Fortran benchmarks:

```

-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.80 GHz, AMD EPYC 7543P

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = 269

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Mar-2021

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -lamdlibm -ljemalloc
-lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Kieee -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-z muldefs -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR655  
2.80 GHz, AMD EPYC 7543P

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = 269

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Mar-2021

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```

-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-fininline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Kieee -Mrecursive -mllvm -fuse-tile-inner-loop
-funroll-loops -mllvm -lsr-in-nested-loop -z muldefs -lamdlibm
-ljemalloc -lflang -lflangrti

```

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655  
2.80 GHz, AMD EPYC 7543P

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = 269

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: -m64 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays  
-flv-function-specialization -mllvm -inline-threshold=1000  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

544.nab\_r: -m64 -flto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3  
-fveclib=AMDLIBM -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays  
-flv-function-specialization -mllvm -inline-threshold=1000

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655  
2.80 GHz, AMD EPYC 7543P

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = 269

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Peak Optimization Flags (Continued)

544.nab\_r (continued):

```
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

C++ benchmarks:

508.namd\_r: basepeak = yes

```
510.parest_r: -m64 -std=c++98 -mno-adx -mno-sse4a  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-suppress-fmas  
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3  
-fveclib=AMDLIBM -finline-aggressive  
-mllvm -unroll-threshold=100 -flv-function-specialization  
-mllvm -enable-licm-vrp -mllvm -reroll-loops  
-mllvm -aggressive-loop-unswitch  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc
```

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp  
-lamdlibm -ljemalloc -lflang -lflangrti
```

549.fotonik3d\_r: basepeak = yes

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -Kieee -Mrecursive  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp  
-Hz,1,0x1 -mllvm -fuse-tile-inner-loop -lamdlibm  
-ljemalloc -lflang -lflangrti
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR655  
2.80 GHz, AMD EPYC 7543P

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = 269

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Kieee -Mrecursive
-lamdlibm -ljemalloc -lflang -lflangrti
```

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-force-vector-interleave=1 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -O3 -ffast-math
-funroll-loops -mllvm -extra-vectorizer-passes
-mllvm -lsr-in-nested-loop -Mrecursive -lamdlibm
-ljemalloc -lflang -lflangrti
```

Benchmarks using both C and C++:

```
511.povray_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -finline-aggressive
-mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -lamdlibm -ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR655  
2.80 GHz, AMD EPYC 7543P

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = 269

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Mar-2021

## Peak Optimization Flags (Continued)

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```

-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Kieee -Mrecursive -lamdlibm
-ljemalloc -lflang -lflangrti

```

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Milan1P-G.html>

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR655  
2.80 GHz, AMD EPYC 7543P

SPECrate®2017\_fp\_base = 264

SPECrate®2017\_fp\_peak = 269

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Mar-2021

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Milan1P-G.xml>

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2020-04-17 09:15:45-0400.

Report generated on 2021-07-21 15:51:56 by CPU2017 PDF formatter v6442.

Originally published on 2021-07-20.