



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology


ThinkSystem SR635  
2.00 GHz, AMD EPYC 7713P

SPECrate®2017\_int\_base = 377

SPECrate®2017\_int\_peak = 398

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Aug-2021  
Hardware Availability: Jun-2021  
Software Availability: Mar-2021

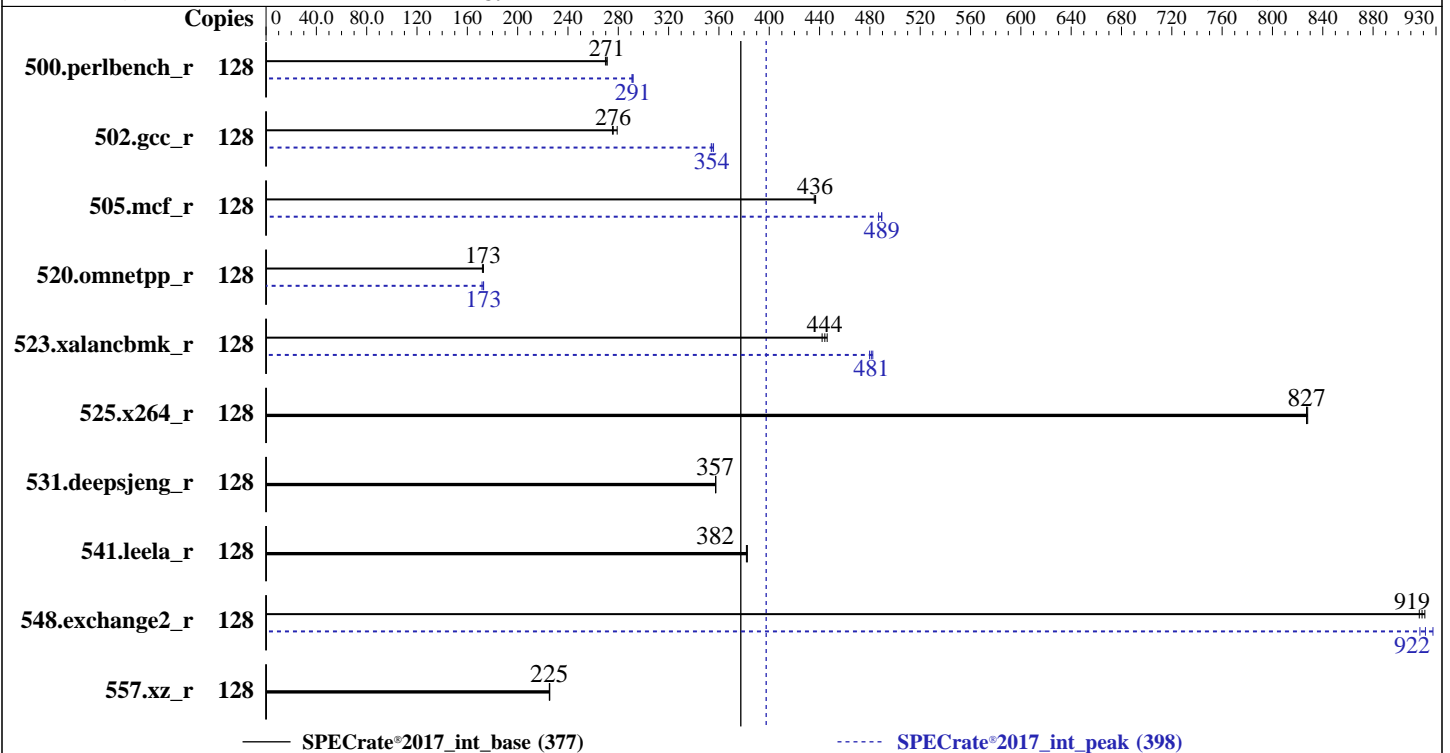

### Hardware

CPU Name: AMD EPYC 7713P  
 Max MHz: 3675  
 Nominal: 2000  
 Enabled: 64 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 8 cores  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP2 (x86\_64)  
 Kernel 5.3.18-22-default  
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC  
 Parallel: No  
 Firmware: Lenovo BIOS Version CFE125U 6.0 released May-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635  
2.00 GHz, AMD EPYC 7713P

SPECrate®2017\_int\_base = 377

SPECrate®2017\_int\_peak = 398

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Aug-2021  
Hardware Availability: Jun-2021  
Software Availability: Mar-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	755	270	752	271	<b>752</b>	<b>271</b>	128	<b>699</b>	<b>291</b>	701	291	698	292
502.gcc_r	128	<b>657</b>	<b>276</b>	649	279	658	275	128	510	356	512	354	<b>511</b>	<b>354</b>
505.mcf_r	128	<b>474</b>	<b>436</b>	475	436	473	437	128	425	487	<b>423</b>	<b>489</b>	423	489
520.omnetpp_r	128	<b>973</b>	<b>173</b>	972	173	976	172	128	978	172	<b>972</b>	<b>173</b>	971	173
523.xalancbmk_r	128	<b>304</b>	<b>444</b>	303	446	306	442	128	282	480	<b>281</b>	<b>481</b>	280	482
525.x264_r	128	271	827	271	828	<b>271</b>	<b>827</b>	128	271	827	271	828	<b>271</b>	<b>827</b>
531.deepsjeng_r	128	410	357	<b>410</b>	<b>357</b>	411	357	128	410	357	<b>410</b>	<b>357</b>	411	357
541.leela_r	128	554	382	<b>554</b>	<b>382</b>	555	382	128	554	382	<b>554</b>	<b>382</b>	555	382
548.exchange2_r	128	<b>365</b>	<b>919</b>	366	917	364	921	128	<b>364</b>	<b>922</b>	362	928	366	917
557.xz_r	128	614	225	613	226	<b>614</b>	<b>225</b>	128	614	225	613	226	<b>614</b>	<b>225</b>

SPECrate®2017\_int\_base = 377

SPECrate®2017\_int\_peak = 398

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635  
2.00 GHz, AMD EPYC 7713P

SPECrate®2017\_int\_base = 377

SPECrate®2017\_int\_peak = 398

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root for peak integer runs and all FP runs to enable Transparent Hugepages (THP).  
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for base integer runs to enable THP only on request.  
'echo 0 > /proc/sys/kernel/numa_balancing' run as root to eliminate NUMA location probing; the workloads are all bound to specific NUMA nodes.
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:  
LD_LIBRARY_PATH =  
    "/home/cpu2017-1.1.8-amd-aocc300-milan-A1/amd_rate_aocc300_milan_A_lib/6  
    4;/home/cpu2017-1.1.8-amd-aocc300-milan-A1/amd_rate_aocc300_milan_A_lib/  
    32:"  
MALLOC_CONF = "retain:true"
```

```
Environment variables set by runcpu during the 523.xalancbmk_r peak run:  
MALLOC_CONF = "thp:never"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 512GiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

NUMA nodes per socket set to NPS4

L2 Stream HW Prefetcher set to Disable

SOC P-states set to P0

LLC as NUMA Node set to Enabled

Memory interleaving set to Disabled

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635  
2.00 GHz, AMD EPYC 7713P

SPECrate®2017\_int\_base = 377

SPECrate®2017\_int\_peak = 398

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

### Platform Notes (Continued)

sysinfo program /home/cpu2017-1.1.8-amd-aocc300-milan-A1/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost Thu Aug 5 00:50:07 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7713P 64-Core Processor

1 "physical id"s (chips)

128 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 64

siblings : 128

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52  
53 54 55 56 57 58 59 60 61 62 63

From lscpu from util-linux 2.33.1:

Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
Address sizes: 48 bits physical, 48 bits virtual  
CPU(s): 128  
On-line CPU(s) list: 0-127  
Thread(s) per core: 2  
Core(s) per socket: 64  
Socket(s): 1  
NUMA node(s): 8  
Vendor ID: AuthenticAMD  
CPU family: 25  
Model: 1  
Model name: AMD EPYC 7713P 64-Core Processor  
Stepping: 1  
CPU MHz: 1790.510  
CPU max MHz: 2000.0000  
CPU min MHz: 1500.0000  
BogoMIPS: 3992.53  
Virtualization: AMD-V  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 512K  
L3 cache: 32768K  
NUMA node0 CPU(s): 0-7,64-71  
NUMA node1 CPU(s): 8-15,72-79

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635  
2.00 GHz, AMD EPYC 7713P

SPECrate®2017\_int\_base = 377

SPECrate®2017\_int\_peak = 398

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

### Platform Notes (Continued)

```

NUMA node2 CPU(s): 16-23,80-87
NUMA node3 CPU(s): 24-31,88-95
NUMA node4 CPU(s): 32-39,96-103
NUMA node5 CPU(s): 40-47,104-111
NUMA node6 CPU(s): 48-55,112-119
NUMA node7 CPU(s): 56-63,120-127
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase
bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_omsave_omload vgif
umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
node 0 size: 32058 MB
node 0 free: 31865 MB
node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
node 1 size: 32250 MB
node 1 free: 32040 MB
node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
node 2 size: 32252 MB
node 2 free: 32036 MB
node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
node 3 size: 32250 MB
node 3 free: 32045 MB
node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
node 4 size: 32252 MB
node 4 free: 32073 MB
node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
node 5 size: 32216 MB
node 5 free: 32043 MB
node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
node 6 size: 32252 MB
node 6 free: 31931 MB
node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635  
2.00 GHz, AMD EPYC 7713P

SPECrate®2017\_int\_base = 377

SPECrate®2017\_int\_peak = 398

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

### Platform Notes (Continued)

```
node 7 size: 32237 MB
node 7 free: 32027 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10 11 12 12 12 12 12 12
  1:  11 10 12 12 12 12 12 12
  2:  12 12 10 11 12 12 12 12
  3:  12 12 11 10 12 12 12 12
  4:  12 12 12 12 10 11 12 12
  5:  12 12 12 12 11 10 12 12
  6:  12 12 12 12 12 12 10 11
  7:  12 12 12 12 12 12 11 10
```

```
From /proc/meminfo
MemTotal:      263955732 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP2"
VERSION_ID="15.2"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp2"
```

```
uname -a:
Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):               Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swapgs
barriers and __user pointer
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635  
2.00 GHz, AMD EPYC 7713P

SPECrate®2017\_int\_base = 377

SPECrate®2017\_int\_peak = 398

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

### Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2): sanitization  
Mitigation: Full AMD retpoline,  
IBPB: conditional, IBRS\_FW, STIBP:  
always-on, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Aug 5 00:47

SPEC is set to: /home/cpu2017-1.1.8-amd-aocc300-milan-A1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	892G	68G	825G	8%	/

From /sys/devices/virtual/dmi/id

Vendor: Lenovo  
Product: ThinkSystem SR635 -[7Y00000000]-  
Product Family: ThinkSystem  
Serial: 0123456789

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

- 8x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200
- 8x Unknown Unknown

BIOS:

- BIOS Vendor: Lenovo
- BIOS Version: CFE125U
- BIOS Date: 05/28/2021
- BIOS Revision: 6.0

(End of data from sysinfo program)

### Compiler Version Notes

C | 502.gcc\_r(peak)

AMD clang version 12.0.0 (CLANG: AOC3\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635  
2.00 GHz, AMD EPYC 7713P

SPECrate®2017\_int\_base = 377

SPECrate®2017\_int\_peak = 398

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

### Compiler Version Notes (Continued)

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
=====

=====  
C | 502.gcc\_r(peak)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
=====

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
=====

=====  
C++ | 523.xalancbmk\_r(peak)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
=====

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)  
=====

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR635  
2.00 GHz, AMD EPYC 7713P

SPECrate®2017\_int\_base = 377

SPECrate®2017\_int\_peak = 398

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Aug-2021  
**Hardware Availability:** Jun-2021  
**Software Availability:** Mar-2021

## Compiler Version Notes (Continued)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
C++ | 523.xalanbmk\_r(peak)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalanbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
Fortran | 548.exchange2\_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635  
2.00 GHz, AMD EPYC 7713P

SPECrate®2017\_int\_base = 377

SPECrate®2017\_int\_peak = 398

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Base Compiler Invocation (Continued)

Fortran benchmarks:

flang

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635  
2.00 GHz, AMD EPYC 7713P

SPECrate®2017\_int\_base = 377

SPECrate®2017\_int\_peak = 398

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-z muldefs -mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm  
-ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4  
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split  
-flto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver3 -fveclib=AMDLIBM -z muldefs -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang -lflangrti
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
```

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
```

```
505.mcf_r: -DSPEC_LP64
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635  
2.00 GHz, AMD EPYC 7713P

SPECrate®2017\_int\_base = 377

SPECrate®2017\_int\_peak = 398

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Peak Portability Flags (Continued)

520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -m64 -Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-fprofile-instr-generate(pass 1)  
-fprofile-instr-use(pass 2) -Ofast -march=znver3  
-fveclib=AMDLIBM -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays  
-flv-function-specialization -mllvm -inline-threshold=1000  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

502.gcc\_r: -m32 -Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3  
-fveclib=AMDLIBM -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays  
-flv-function-specialization -mllvm -inline-threshold=1000  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -fgnu89-inline  
-ljemalloc

505.mcf\_r: -m64 -Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-enable-licm-vrp -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635  
2.00 GHz, AMD EPYC 7713P

SPECrate®2017\_int\_base = 377

SPECrate®2017\_int\_peak = 398

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Peak Optimization Flags (Continued)

505.mcf\_r (continued):

```
-flv-function-specialization -mllvm -inline-threshold=1000  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

525.x264\_r: basepeak = yes

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: -m64 -std=c++98

```
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -finline-aggressive  
-mllvm -unroll-threshold=100 -flv-function-specialization  
-mllvm -enable-licm-vrp -mllvm -reroll-loops  
-mllvm -aggressive-loop-unswitch  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdlibm -ljemalloc
```

523.xalancbmk\_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto

```
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -finline-aggressive  
-mllvm -unroll-threshold=100 -flv-function-specialization  
-mllvm -enable-licm-vrp -mllvm -reroll-loops  
-mllvm -aggressive-loop-unswitch  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-ljemalloc
```

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR635  
2.00 GHz, AMD EPYC 7713P

SPECrate®2017\_int\_base = 377

SPECrate®2017\_int\_peak = 398

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2021

Hardware Availability: Jun-2021

Software Availability: Mar-2021

## Peak Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4  
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split  
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver3 -fveclib=AMDLIBM -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang -lflangrti
```

## Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

```
502.gcc_r: -L/usr/lib -Wno-unused-command-line-argument
```

```
-L/sppo/bin/cpu2017v115aocc3/amd_rate_aocc300_milan_A_lib/32
```

C++ benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

```
523.xalancbmk_r: -L/usr/lib -Wno-unused-command-line-argument
```

```
-L/sppo/bin/cpu2017v115aocc3/amd_rate_aocc300_milan_A_lib/32
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Milan1P-G.html>

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Milan1P-G.xml>

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-08-04 12:50:06-0400.

Report generated on 2021-09-01 14:24:48 by CPU2017 PDF formatter v6442.

Originally published on 2021-08-31.