



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_fp\_base = 56.2

PowerEdge R350 (Intel Xeon E-2388G, 3.20 GHz)

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2021

Hardware Availability: Jul-2021

Software Availability: May-2021

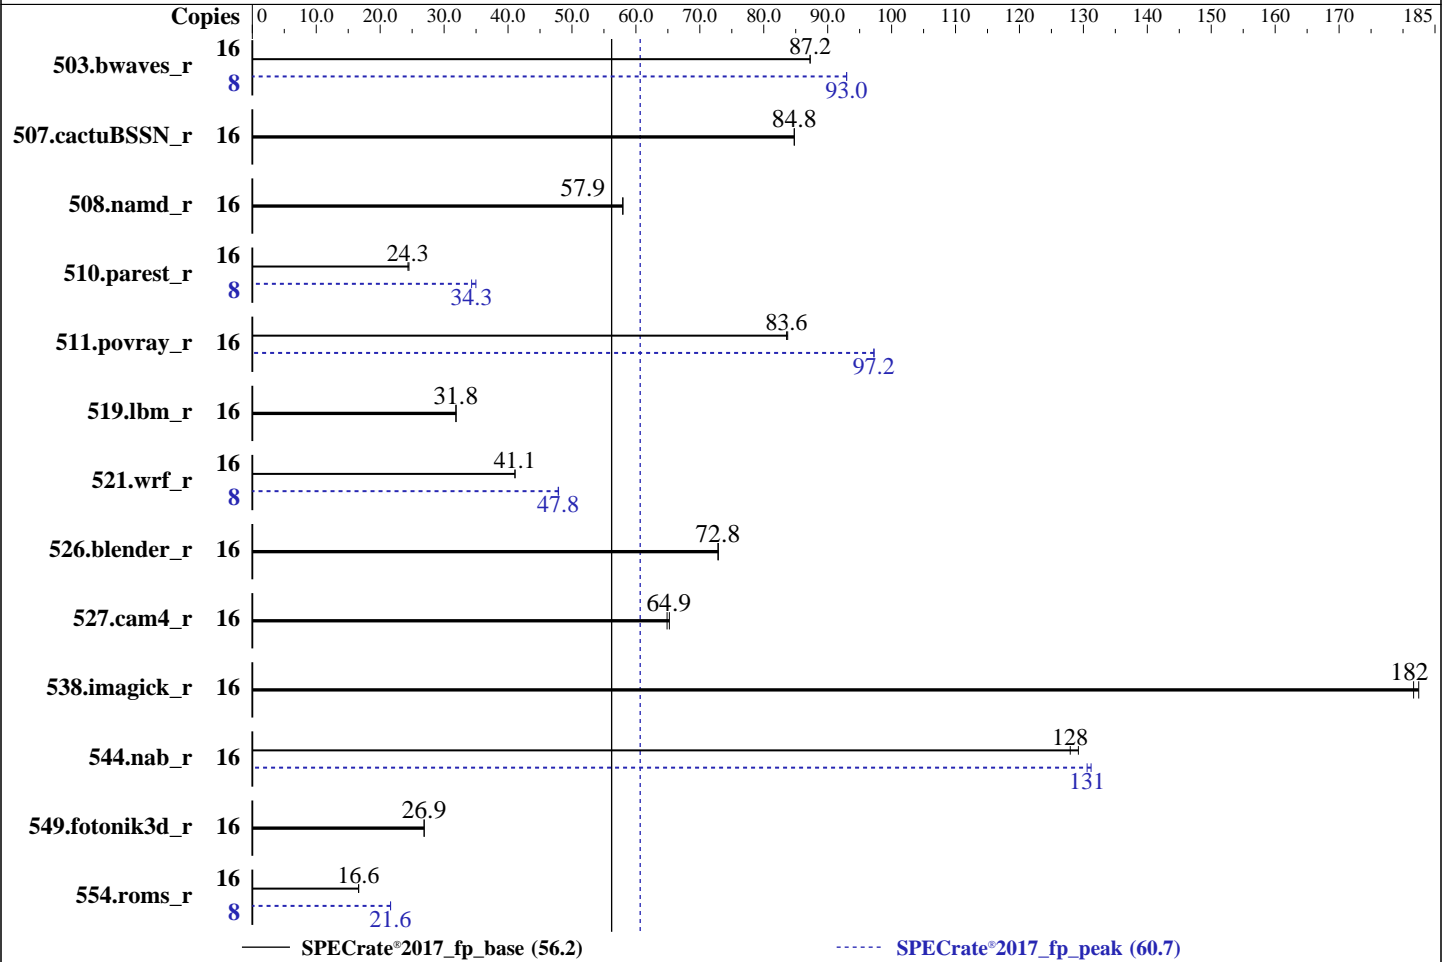

### Hardware

CPU Name: Intel Xeon E-2388G  
 Max MHz: 5100  
 Nominal: 3200  
 Enabled: 8 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 16 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (2 x 32 GB 2Rx8 PC4-3200AA-E)  
 Storage: 75 GB on tmpfs  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.4 (Ootpa)  
 4.18.0-305.el8.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++  
 Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler  
 Classic Build 20201112 for Linux;  
 C/C++: Version 2021.1 of Intel C/C++ Compiler  
 Classic Build 20201112 for Linux  
 Parallel: No  
 Firmware: Version 1.1.2 released Sep-2021  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance  
 at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 56.2

PowerEdge R350 (Intel Xeon E-2388G, 3.20 GHz)

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Oct-2021  
Hardware Availability: Jul-2021  
Software Availability: May-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	16	<b>1839</b>	<b>87.2</b>	1839	87.3			8	863	93.0	<b>863</b>	<b>93.0</b>		
507.cactuBSSN_r	16	<b>239</b>	<b>84.8</b>	239	84.8			16	<b>239</b>	<b>84.8</b>	239	84.8		
508.namd_r	16	<b>262</b>	<b>57.9</b>	262	58.0			16	<b>262</b>	<b>57.9</b>	262	58.0		
510.parest_r	16	1708	24.5	<b>1719</b>	<b>24.3</b>			8	<b>610</b>	<b>34.3</b>	598	35.0		
511.povray_r	16	446	83.7	<b>447</b>	<b>83.6</b>			16	<b>384</b>	<b>97.2</b>	384	97.3		
519.lbm_r	16	<b>530</b>	<b>31.8</b>	529	31.9			16	<b>530</b>	<b>31.8</b>	529	31.9		
521.wrf_r	16	<b>872</b>	<b>41.1</b>	872	41.1			8	374	47.9	<b>375</b>	<b>47.8</b>		
526.blender_r	16	<b>335</b>	<b>72.8</b>	334	72.9			16	<b>335</b>	<b>72.8</b>	334	72.9		
527.cam4_r	16	<b>431</b>	<b>64.9</b>	429	65.2			16	<b>431</b>	<b>64.9</b>	429	65.2		
538.imagick_r	16	<b>219</b>	<b>182</b>	218	182			16	<b>219</b>	<b>182</b>	218	182		
544.nab_r	16	<b>210</b>	<b>128</b>	208	129			16	205	131	<b>206</b>	<b>131</b>		
549.fotonik3d_r	16	<b>2320</b>	<b>26.9</b>	2320	26.9			16	<b>2320</b>	<b>26.9</b>	2320	26.9		
554.roms_r	16	1527	16.6	<b>1531</b>	<b>16.6</b>			8	588	21.6	<b>588</b>	<b>21.6</b>		

SPECrate®2017\_fp\_base = 56.2

SPECrate®2017\_fp\_peak = 60.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/mnt/ramdisk/cpu2017-1.1.8-ic2021.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.8-ic2021.1/je5.0.1-64"  
MALLOCONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1  
Transparent Huge Pages enabled by default

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 56.2

PowerEdge R350 (Intel Xeon E-2388G, 3.20 GHz)

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2021

Hardware Availability: Jul-2021

Software Availability: May-2021

## General Notes (Continued)

Prior to runcpu invocation  
 Filesystem page cache synced and cleared with:  
 sync; echo 3> /proc/sys/vm/drop\_caches  
 jemalloc, a general purpose malloc implementation  
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 75 GB ramdisk created with the cmd: "mount -t tmpfs -o size=75G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

Sub NUMA Cluster : 2-Way Clustering  
 Virtualization Technology : Disabled

System Profile : Custom  
 CPU Power Management : Maximum Performance  
 C1E : Disabled  
 C States : Autonomous  
 Memory Patrol Scrub : Disabled  
 Energy Efficiency Policy : Performance  
 CPU Interconnect Bus Link  
 Power Management : Disabled  
 PCI ASPM L1 Link  
 Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-ic2021.1/bin/sysinfo  
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
 running on localhost.localdomain Fri Oct 15 15:30:11 2021

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
 model name : Intel(R) Xeon(R) E-2388G CPU @ 3.20GHz  
 1 "physical id"s (chips)  
 16 "processors"

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 56.2

PowerEdge R350 (Intel Xeon E-2388G, 3.20 GHz)

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2021

Hardware Availability: Jul-2021

Software Availability: May-2021

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7
```

From lscpu from util-linux 2.32.1:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 16
On-line CPU(s) list:   0-15
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):              1
NUMA node(s):          1
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel
CPU family:             6
Model:                  167
Model name:             Intel(R) Xeon(R) E-2388G CPU @ 3.20GHz
BIOS Model name:       Intel(R) Xeon(R) E-2388G CPU @ 3.20GHz
Stepping:               1
CPU MHz:                4600.000
BogoMIPS:               6384.00
Virtualization:         VT-x
L1d cache:              48K
L1i cache:              32K
L2 cache:               512K
L3 cache:               16384K
NUMA node0 CPU(s):     0-15
```

```
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault invpcid_single ssbd
ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid
mpx avx512f avx512dq rdseed adx smap avx512ifma clflushopt intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq rdpid fsrm md_clear flush_l1d arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 16384 KB
```

From numactl --hardware

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 56.2

PowerEdge R350 (Intel Xeon E-2388G, 3.20 GHz)

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2021

Hardware Availability: Jul-2021

Software Availability: May-2021

## Platform Notes (Continued)

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
node 0 size: 64027 MB
node 0 free: 42459 MB
node distances:
node 0
0: 10

```

```

From /proc/meminfo
MemTotal:          65564648 kB
HugePages_Total:    0
Hugepagesize:       2048 kB

```

```

/sbin/tuned-adm active
Current active profile: throughput-performance

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.4 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.4"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga

```

```

uname -a:
Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021
x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):       Not affected
Microarchitectural Data Sampling:       Not affected
CVE-2017-5754 (Meltdown):                Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):       Mitigation: usercopy/swapgs barriers and __user pointer sanitization

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 56.2

PowerEdge R350 (Intel Xeon E-2388G, 3.20 GHz)

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2021

Hardware Availability: Jul-2021

Software Availability: May-2021

## Platform Notes (Continued)

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Oct 15 11:14

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-ic2021.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	75G	16G	60G	21%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id

```
Vendor:      Dell Inc.
Product:    PowerEdge R350
Product Family: PowerEdge
Serial:     7SWJFF3
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x 002C00000C01 18ASF4G72AZ-3G2B1 32 GB 2 rank 3200

BIOS:

```
BIOS Vendor:   Dell Inc.
BIOS Version:  1.1.2
BIOS Date:    09/23/2021
BIOS Revision: 1.1
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
          | 544.nab_r(base, peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 56.2

PowerEdge R350 (Intel Xeon E-2388G, 3.20 GHz)

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2021

Hardware Availability: Jul-2021

Software Availability: May-2021

## Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 56.2

PowerEdge R350 (Intel Xeon E-2388G, 3.20 GHz)

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Oct-2021  
Hardware Availability: Jul-2021  
Software Availability: May-2021

## Compiler Version Notes (Continued)

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 56.2

PowerEdge R350 (Intel Xeon E-2388G, 3.20 GHz)

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2021

Hardware Availability: Jul-2021

Software Availability: May-2021

## Compiler Version Notes (Continued)

=====  
Fortran, C | 521.wrf\_r(peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 56.2

PowerEdge R350 (Intel Xeon E-2388G, 3.20 GHz)

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2021

Hardware Availability: Jul-2021

Software Availability: May-2021

## Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

C++ benchmarks:

```

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using both Fortran and C:

```

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 56.2

PowerEdge R350 (Intel Xeon E-2388G, 3.20 GHz)

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2021

Hardware Availability: Jul-2021

Software Availability: May-2021

## Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

521.wrf\_r: ifort icc

527.cam4\_r: ifort icx

Benchmarks using both C and C++:

511.povray\_r: icpc icc

526.blender\_r: icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 56.2

PowerEdge R350 (Intel Xeon E-2388G, 3.20 GHz)

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2021

Hardware Availability: Jul-2021

Software Availability: May-2021

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto -Ofast -qopt-mem-layout-trans=4 -fimf-accuracy-bits=14:sqrt -mbranches-within-32B-boundaries -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -mbranches-within-32B-boundaries -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

549.fotonik3d\_r: basepeak = yes

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

521.wrf\_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 56.2

PowerEdge R350 (Intel Xeon E-2388G, 3.20 GHz)

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2021

Hardware Availability: Jul-2021

Software Availability: May-2021

## Peak Optimization Flags (Continued)

521.wrf\_r (continued):

```
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.4.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.4.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-10-15 15:30:11-0400.

Report generated on 2021-11-10 10:13:12 by CPU2017 PDF formatter v6442.

Originally published on 2021-11-09.