



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_fp\_base = 116

PowerEdge T550 (Intel Xeon Silver 4310, 2.10 GHz)

SPECspeed®2017\_fp\_peak = 119

CPU2017 License: 55


Test Date: Nov-2021

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2021

Tested by: Dell Inc.

Software Availability: May-2021

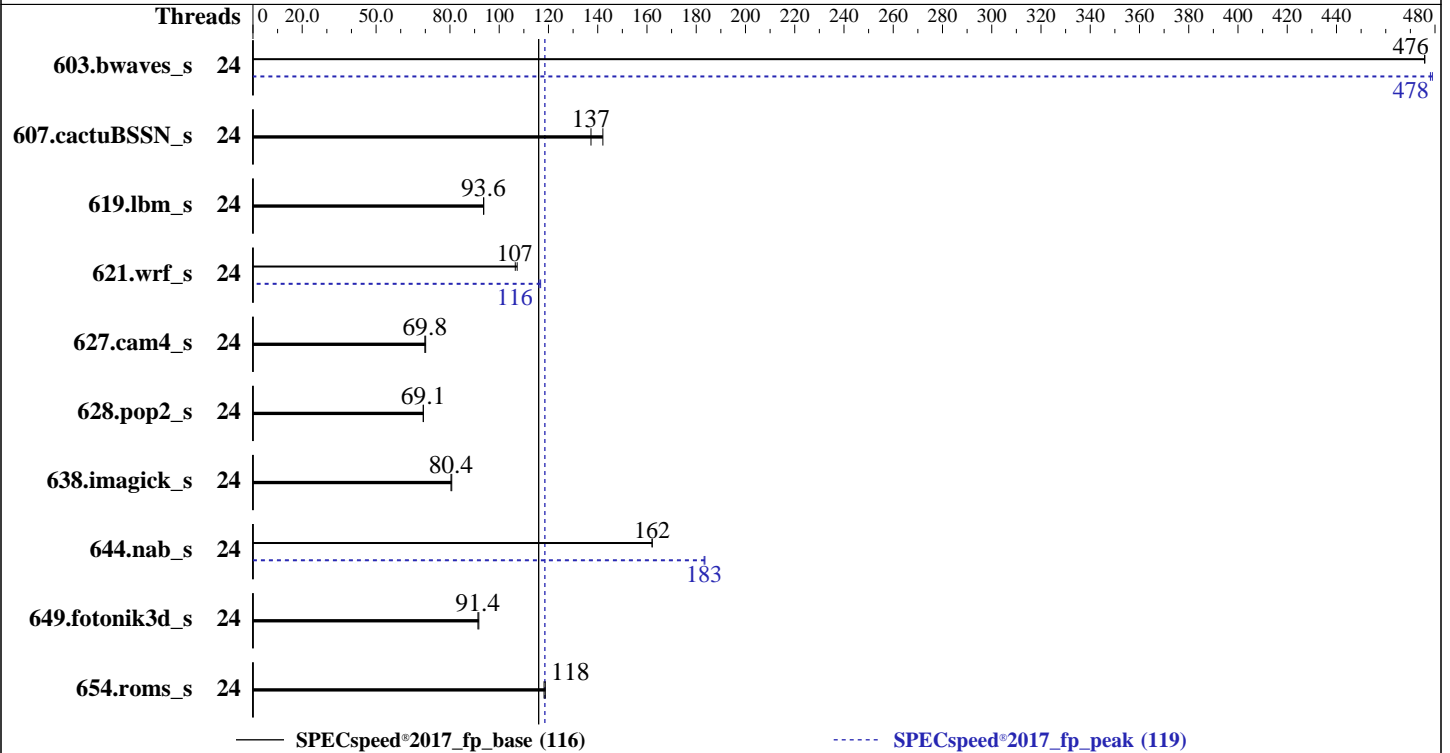

### Hardware

CPU Name: Intel Xeon Silver 4310  
 Max MHz: 3300  
 Nominal: 2100  
 Enabled: 24 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 18 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC4-3200AA-R, running at 2666)  
 Storage: 125 GB on tmpfs  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.4 (Ootpa)  
 4.18.0-305.el8.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++  
 Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler  
 Classic Build 20201112 for Linux;  
 C/C++: Version 2021.1 of Intel C/C++ Compiler  
 Classic Build 20201112 for Linux  
 Parallel: Yes  
 Firmware: Version 1.3.7 released Jul-2021  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance  
 at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 116

PowerEdge T550 (Intel Xeon Silver 4310, 2.10 GHz)

SPECSpeed®2017\_fp\_peak = 119

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2021  
Hardware Availability: Oct-2021  
Software Availability: May-2021

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	24	<b><u>124</u></b>	<b><u>476</u></b>	124	476			24	123	479	<b><u>123</u></b>	<b><u>478</u></b>		
607.cactuBSSN_s	24	117	142	<b><u>121</u></b>	<b><u>137</u></b>			24	117	142	<b><u>121</u></b>	<b><u>137</u></b>		
619.lbm_s	24	55.9	93.7	<b><u>56.0</u></b>	<b><u>93.6</u></b>			24	55.9	93.7	<b><u>56.0</u></b>	<b><u>93.6</u></b>		
621.wrf_s	24	123	107	<b><u>124</u></b>	<b><u>107</u></b>			24	113	117	<b><u>114</u></b>	<b><u>116</u></b>		
627.cam4_s	24	126	70.1	<b><u>127</u></b>	<b><u>69.8</u></b>			24	126	70.1	<b><u>127</u></b>	<b><u>69.8</u></b>		
628.pop2_s	24	172	69.2	<b><u>172</u></b>	<b><u>69.1</u></b>			24	172	69.2	<b><u>172</u></b>	<b><u>69.1</u></b>		
638.imagick_s	24	<b><u>179</u></b>	<b><u>80.4</u></b>	179	80.7			24	<b><u>179</u></b>	<b><u>80.4</u></b>	179	80.7		
644.nab_s	24	108	162	<b><u>108</u></b>	<b><u>162</u></b>			24	95.2	184	<b><u>95.4</u></b>	<b><u>183</u></b>		
649.fotonik3d_s	24	99.4	91.7	<b><u>99.8</u></b>	<b><u>91.4</u></b>			24	99.4	91.7	<b><u>99.8</u></b>	<b><u>91.4</u></b>		
654.roms_s	24	<b><u>133</u></b>	<b><u>118</u></b>	133	119			24	<b><u>133</u></b>	<b><u>118</u></b>	133	119		

SPECSpeed®2017\_fp\_base = 116

SPECSpeed®2017\_fp\_peak = 119

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
  "/mnt/ramdisk/cpu2017-1.1.8-ic2021.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.8-ic2021.1/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 116

PowerEdge T550 (Intel Xeon Silver 4310, 2.10 GHz)

SPECSpeed®2017\_fp\_peak = 119

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2021  
Hardware Availability: Oct-2021  
Software Availability: May-2021

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

Logical Processor : Disabled  
Virtualization Technology : Disabled  
  
System Profile : Custom  
CPU Power Management : Maximum Performance  
C1E : Disabled  
C States : Autonomous  
Memory Patrol Scrub : Disabled  
Energy Efficiency Policy : Performance  
CPU Interconnect Bus Link  
Power Management : Disabled  
PCI ASPM L1 Link  
Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-ic2021.1/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost.localdomain Sat Nov 6 10:35:33 2021

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Silver 4310 CPU @ 2.10GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 12
siblings  : 12
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11
```

From lscpu from util-linux 2.32.1:  
Architecture: x86\_64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 116

PowerEdge T550 (Intel Xeon Silver 4310, 2.10 GHz)

SPECspeed®2017\_fp\_peak = 119

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2021

Hardware Availability: Oct-2021

Software Availability: May-2021

## Platform Notes (Continued)

```

CPU op-mode(s):      32-bit, 64-bit
Byte Order:          Little Endian
CPU(s):              24
On-line CPU(s) list: 0-23
Thread(s) per core:  1
Core(s) per socket: 12
Socket(s):           2
NUMA node(s):        2
Vendor ID:           GenuineIntel
BIOS Vendor ID:      Intel
CPU family:           6
Model:               106
Model name:           Intel(R) Xeon(R) Silver 4310 CPU @ 2.10GHz
BIOS Model name:      Intel(R) Xeon(R) Silver 4310 CPU @ 2.10GHz
Stepping:            6
CPU MHz:              3007.156
BogoMIPS:             4200.00
Virtualization:      VT-x
L1d cache:           48K
L1i cache:           32K
L2 cache:            1280K
L3 cache:            18432K
NUMA node0 CPU(s):   0,2,4,6,8,10,12,14,16,18,20,22
NUMA node1 CPU(s):   1,3,5,7,9,11,13,15,17,19,21,23
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd
dtherm ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm md_clear pconfig
flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 18432 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6 8 10 12 14 16 18 20 22
node 0 size: 257146 MB
node 0 free: 245642 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 116

PowerEdge T550 (Intel Xeon Silver 4310, 2.10 GHz)

SPECspeed®2017\_fp\_peak = 119

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2021  
Hardware Availability: Oct-2021  
Software Availability: May-2021

## Platform Notes (Continued)

```
node 1 cpus: 1 3 5 7 9 11 13 15 17 19 21 23
node 1 size: 258042 MB
node 1 free: 252978 MB
node distances:
node 0 1
0: 10 20
1: 20 10
```

```
From /proc/meminfo
MemTotal: 527553884 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/sbin/tuned-adm active
Current active profile: throughput-performance
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.4 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.4"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-12207 (iTLB Multihit): Not affected
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB:
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 116

PowerEdge T550 (Intel Xeon Silver 4310, 2.10 GHz)

SPECspeed®2017\_fp\_peak = 119

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2021

Hardware Availability: Oct-2021

Software Availability: May-2021

## Platform Notes (Continued)

conditional, RSB filling  
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected  
 CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Nov 6 07:37

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-ic2021.1  

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	125G	11G	115G	9%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id  
 Vendor: Dell Inc.  
 Product: PowerEdge T550  
 Product Family: PowerEdge  
 Serial: 3LM1509

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
 16x 002C00B3002C 18ASF4G72PDZ-3G2E1 32 GB 2 rank 3200, configured at 2666

BIOS:  
 BIOS Vendor: Dell Inc.  
 BIOS Version: 1.3.7  
 BIOS Date: 07/30/2021  
 BIOS Revision: 1.3

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C          | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
          | 644.nab_s(base)
-----
```

```
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
C          | 644.nab_s(peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 116

PowerEdge T550 (Intel Xeon Silver 4310, 2.10 GHz)

SPECspeed®2017\_fp\_peak = 119

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2021

Hardware Availability: Oct-2021

Software Availability: May-2021

## Compiler Version Notes (Continued)

Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
| 644.nab\_s(base)

-----  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 644.nab\_s(peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

-----  
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 116

PowerEdge T550 (Intel Xeon Silver 4310, 2.10 GHz)

SPECspeed®2017\_fp\_peak = 119

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2021

Hardware Availability: Oct-2021

Software Availability: May-2021

## Compiler Version Notes (Continued)

-----

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 116

PowerEdge T550 (Intel Xeon Silver 4310, 2.10 GHz)

SPECspeed®2017\_fp\_peak = 119

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2021

Hardware Availability: Oct-2021

Software Availability: May-2021

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

644.nab\_s: icx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 116

PowerEdge T550 (Intel Xeon Silver 4310, 2.10 GHz)

SPECspeed®2017\_fp\_peak = 119

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2021

Hardware Availability: Oct-2021

Software Availability: May-2021

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -fiopenmp  
-DSPEC\_OPENMP -qopt-mem-layout-trans=4  
-fimf-accuracy-bits=14:sqrt  
-mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

603.bwaves\_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)  
-DSPEC\_SUPPRESS\_OPENMP -DSPEC\_OPENMP -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs  
-mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)  
-prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4  
-DSPEC\_SUPPRESS\_OPENMP -qopenmp -DSPEC\_OPENMP  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 116

PowerEdge T550 (Intel Xeon Silver 4310, 2.10 GHz)

SPECspeed®2017\_fp\_peak = 119

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2021

Hardware Availability: Oct-2021

Software Availability: May-2021

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.4.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.4.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-11-06 11:35:32-0400.

Report generated on 2021-12-07 17:03:00 by CPU2017 PDF formatter v6442.

Originally published on 2021-12-07.