



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 12.7

SPECspeed®2017\_int\_peak = 12.8

PowerEdge R7525 (AMD EPYC 7573X 32-Core Processor)

CPU2017 License: 55


Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

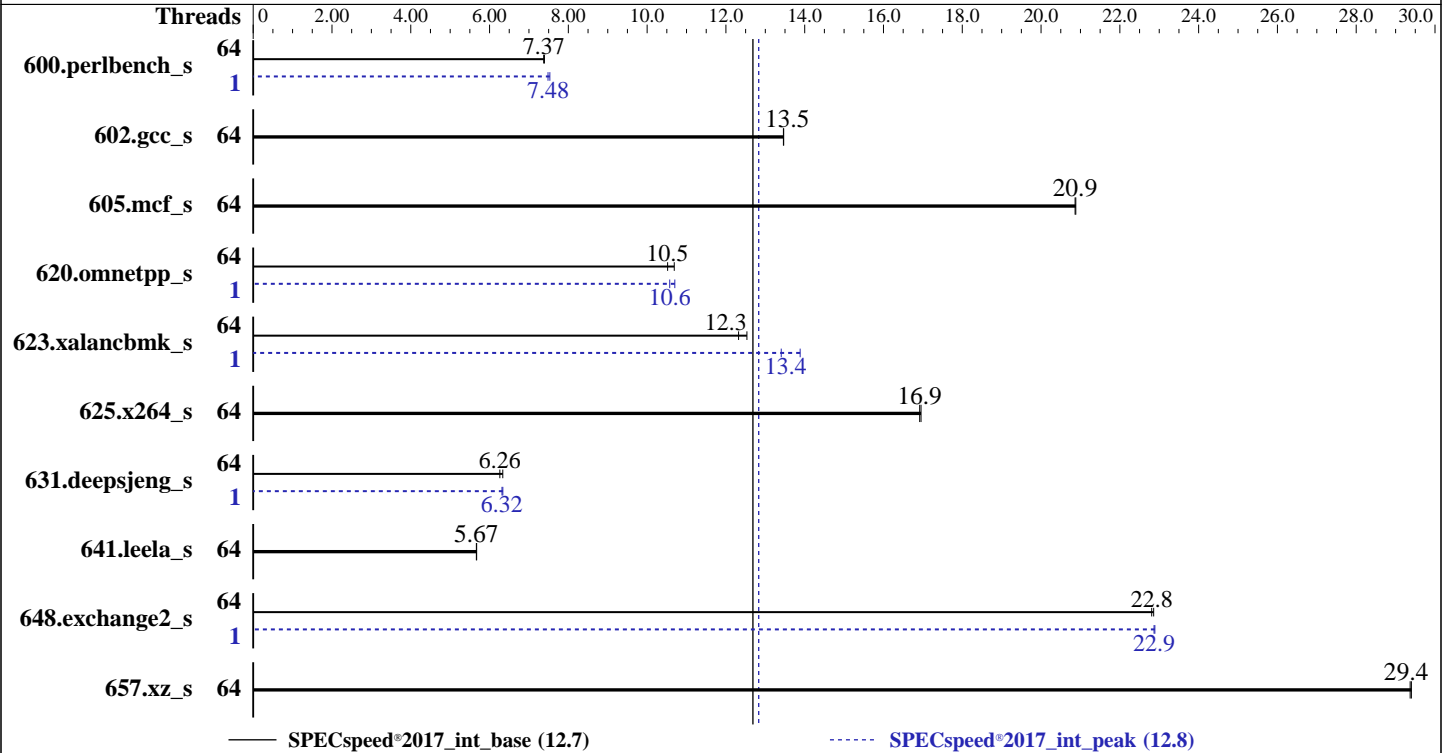

### Hardware

CPU Name: AMD EPYC 7573X  
 Max MHz: 3600  
 Nominal: 2800  
 Enabled: 64 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 768 MB I+D on chip per chip, 96 MB shared / 4 cores  
 Other: None  
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200AA-L)  
 Storage: 125 GB on tmpfs  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)  
 4.18.0-240.el8.x86\_64  
 Compiler: C/C++/Fortran: Version 3.2.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 2.6.5 released Dec-2021  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 12.7

PowerEdge R7525 (AMD EPYC 7573X 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	<b><u>241</u></b>	<b><u>7.37</u></b>	240	7.39			1	<b><u>237</u></b>	<b><u>7.48</u></b>	236	7.53		
602.gcc_s	64	296	13.5	<b><u>296</u></b>	<b><u>13.5</u></b>			64	296	13.5	<b><u>296</u></b>	<b><u>13.5</u></b>		
605.mcf_s	64	<b><u>226</u></b>	<b><u>20.9</u></b>	226	20.9			64	<b><u>226</u></b>	<b><u>20.9</u></b>	226	20.9		
620.omnetpp_s	64	<b><u>155</u></b>	<b><u>10.5</u></b>	153	10.7			1	152	10.7	<b><u>154</u></b>	<b><u>10.6</u></b>		
623.xalancbmk_s	64	<b><u>115</u></b>	<b><u>12.3</u></b>	113	12.5			1	102	13.9	<b><u>106</u></b>	<b><u>13.4</u></b>		
625.x264_s	64	<b><u>104</u></b>	<b><u>16.9</u></b>	104	17.0			64	<b><u>104</u></b>	<b><u>16.9</u></b>	104	17.0		
631.deepsjeng_s	64	<b><u>229</u></b>	<b><u>6.26</u></b>	226	6.34			1	226	6.34	<b><u>227</u></b>	<b><u>6.32</u></b>		
641.leela_s	64	<b><u>301</u></b>	<b><u>5.67</u></b>	301	5.67			64	<b><u>301</u></b>	<b><u>5.67</u></b>	301	5.67		
648.exchange2_s	64	129	22.9	<b><u>129</u></b>	<b><u>22.8</u></b>			1	<b><u>129</u></b>	<b><u>22.9</u></b>	128	22.9		
657.xz_s	64	210	29.4	<b><u>210</u></b>	<b><u>29.4</u></b>			64	210	29.4	<b><u>210</u></b>	<b><u>29.4</u></b>		

SPECspeed®2017\_int\_base = **12.7**

SPECspeed®2017\_int\_peak = **12.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.7

PowerEdge R7525 (AMD EPYC 7573X 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-63"
```

```
LD_LIBRARY_PATH =
```

```
"/mnt/ramdisk/cpu2017-1.1.8-aocc320-A1/amd_speed_aocc320_milanx_A_lib/li  
b:/mnt/ramdisk/cpu2017-1.1.8-aocc320-A1/amd_speed_aocc320_milanx_A_lib/l  
ib32:"
```

```
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
```

```
MALLOC_CONF = "retain:true"
```

```
OMP_DYNAMIC = "false"
```

```
OMP_SCHEDULE = "static"
```

```
OMP_STACKSIZE = "128M"
```

```
OMP_THREAD_LIMIT = "64"
```

Environment variables set by runcpu during the 600.perlbench\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 620.omnetpp\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 623.xalanbmk\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 631.deepsjeng\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 648.exchange2\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.7

PowerEdge R7525 (AMD EPYC 7573X 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

## General Notes (Continued)

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)  
jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

Logical Processor : Disabled

L3 Cache as NUMA Domain : Enabled

Virtualization Technology : Disabled

DRAM Refresh Delay : Performance

System Profile : Custom

CPU Power Management : Maximum Performance

Memory Patrol Scrub : Disabled

PCI ASPM L1 Link

Power Management : Disabled

Algorithm Performance

Boost Disable (ApbDis): Enabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-aocc320-A1/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost.localdomain Wed Feb 23 22:28:52 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7573X 32-Core Processor

2 "physical id"s (chips)

64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 32

siblings : 32

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31

From lscpu from util-linux 2.32.1:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.7

PowerEdge R7525 (AMD EPYC 7573X 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

## Platform Notes (Continued)

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               64
On-line CPU(s) list: 0-63
Thread(s) per core:   1
Core(s) per socket:   32
Socket(s):            2
NUMA node(s):         16
Vendor ID:            AuthenticAMD
CPU family:           25
Model:               1
Model name:           AMD EPYC 7573X 32-Core Processor
Stepping:            2
CPU MHz:              1684.709
BogoMIPS:             5589.52
Virtualization:       AMD-V
L1d cache:           32K
L1i cache:           32K
L2 cache:            512K
L3 cache:            98304K
NUMA node0 CPU(s):   0-3
NUMA node1 CPU(s):   4-7
NUMA node2 CPU(s):   8-11
NUMA node3 CPU(s):   12-15
NUMA node4 CPU(s):   16-19
NUMA node5 CPU(s):   20-23
NUMA node6 CPU(s):   24-27
NUMA node7 CPU(s):   28-31
NUMA node8 CPU(s):   32-35
NUMA node9 CPU(s):   36-39
NUMA node10 CPU(s):  40-43
NUMA node11 CPU(s):  44-47
NUMA node12 CPU(s):  48-51
NUMA node13 CPU(s):  52-55
NUMA node14 CPU(s):  56-59
NUMA node15 CPU(s):  60-63
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpelgb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall
fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb
sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.7

PowerEdge R7525 (AMD EPYC 7573X 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

## Platform Notes (Continued)

nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold  
v\_vmsave\_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow\_recov succor smca

```
/proc/cpuinfo cache data  
cache size : 512 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 16 nodes (0-15)  
node 0 cpus: 0 1 2 3  
node 0 size: 128062 MB  
node 0 free: 127995 MB  
node 1 cpus: 4 5 6 7  
node 1 size: 129016 MB  
node 1 free: 128975 MB  
node 2 cpus: 8 9 10 11  
node 2 size: 129018 MB  
node 2 free: 128974 MB  
node 3 cpus: 12 13 14 15  
node 3 size: 129018 MB  
node 3 free: 128974 MB  
node 4 cpus: 16 17 18 19  
node 4 size: 129018 MB  
node 4 free: 128972 MB  
node 5 cpus: 20 21 22 23  
node 5 size: 129008 MB  
node 5 free: 128975 MB  
node 6 cpus: 24 25 26 27  
node 6 size: 129016 MB  
node 6 free: 128927 MB  
node 7 cpus: 28 29 30 31  
node 7 size: 116904 MB  
node 7 free: 116856 MB  
node 8 cpus: 32 33 34 35  
node 8 size: 129014 MB  
node 8 free: 128656 MB  
node 9 cpus: 36 37 38 39  
node 9 size: 129012 MB  
node 9 free: 128731 MB  
node 10 cpus: 40 41 42 43  
node 10 size: 129020 MB  
node 10 free: 128838 MB  
node 11 cpus: 44 45 46 47  
node 11 size: 128971 MB  
node 11 free: 128884 MB  
node 12 cpus: 48 49 50 51  
node 12 size: 129014 MB
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.7

PowerEdge R7525 (AMD EPYC 7573X 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

## Platform Notes (Continued)

```

node 12 free: 128933 MB
node 13 cpus: 52 53 54 55
node 13 size: 129018 MB
node 13 free: 125535 MB
node 14 cpus: 56 57 58 59
node 14 size: 129018 MB
node 14 free: 128954 MB
node 15 cpus: 60 61 62 63
node 15 size: 129016 MB
node 15 free: 128935 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
 0:  10 11 11 11 11 11 11 11 32 32 32 32 32 32 32 32
 1:  11 10 11 11 11 11 11 11 32 32 32 32 32 32 32 32
 2:  11 11 10 11 11 11 11 11 32 32 32 32 32 32 32 32
 3:  11 11 11 10 11 11 11 11 32 32 32 32 32 32 32 32
 4:  11 11 11 11 10 11 11 11 32 32 32 32 32 32 32 32
 5:  11 11 11 11 11 10 11 11 32 32 32 32 32 32 32 32
 6:  11 11 11 11 11 11 10 11 32 32 32 32 32 32 32 32
 7:  11 11 11 11 11 11 11 10 32 32 32 32 32 32 32 32
 8:  32 32 32 32 32 32 32 32 10 11 11 11 11 11 11 11
 9:  32 32 32 32 32 32 32 32 11 10 11 11 11 11 11 11
10:  32 32 32 32 32 32 32 32 11 11 10 11 11 11 11 11
11:  32 32 32 32 32 32 32 32 11 11 11 10 11 11 11 11
12:  32 32 32 32 32 32 32 32 11 11 11 11 10 11 11 11
13:  32 32 32 32 32 32 32 32 11 11 11 11 11 10 11 11
14:  32 32 32 32 32 32 32 32 11 11 11 11 11 11 10 11
15:  32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 10

```

```

From /proc/meminfo
MemTotal: 2100489324 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

/sbin/tuned-adm active
Current active profile: throughput-performance

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.7

PowerEdge R7525 (AMD EPYC 7573X 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

## Platform Notes (Continued)

```
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga
```

uname -a:

```
Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Feb 23 22:26

```
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-aocc320-A1
Filesystem      Type      Size  Used Avail Use% Mounted on
tmpfs            tmpfs     125G  3.3G  122G   3% /mnt/ramdisk
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Dell Inc.
Product:         PowerEdge R7525
Product Family: PowerEdge
Serial:          GK2D853
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
16x 802C8632802C 72ASS16G72LZ-3G2B3 128 GB 4 rank 3200
16x Not Specified Not Specified
```

BIOS:

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.7

PowerEdge R7525 (AMD EPYC 7573X 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.8

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Feb-2022  
Hardware Availability: Mar-2022  
Software Availability: Dec-2021

## Platform Notes (Continued)

BIOS Vendor: Dell Inc.  
BIOS Version: 2.6.5  
BIOS Date: 12/28/2021  
BIOS Revision: 2.6

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak) 657.xz\_s(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
-----

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
-----

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
-----

## Base Compiler Invocation

C benchmarks:  
clang

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.7

PowerEdge R7525 (AMD EPYC 7573X 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

## Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.7

PowerEdge R7525 (AMD EPYC 7573X 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-finline-aggressive -flv-function-specialization
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp=true
-mllvm -convert-pow-exp-to-int=false -z muldefs
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -z muldefs
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

C++ benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.7

PowerEdge R7525 (AMD EPYC 7573X 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

602.gcc\_s: basepeak = yes

605.mcf\_s: basepeak = yes

625.x264\_s: basepeak = yes

657.xz\_s: basepeak = yes

C++ benchmarks:

```
620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.7

PowerEdge R7525 (AMD EPYC 7573X 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

## Peak Optimization Flags (Continued)

```

623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang

631.deepsjeng_s: -m64 -Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -convert-pow-exp-to-int=false
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang

641.leela_s: basepeak = yes

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp=libomp -lomp
-lamdlibm -ljemalloc -lflang

```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.7

PowerEdge R7525 (AMD EPYC 7573X 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.8

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.4.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-02-23 23:28:52-0500.

Report generated on 2022-03-21 16:17:45 by CPU2017 PDF formatter v6442.

Originally published on 2022-03-21.