



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
3.05 GHz, AMD EPYC 7373X

SPECspeed®2017_int_base = 13.4

SPECspeed®2017_int_peak = 13.6

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

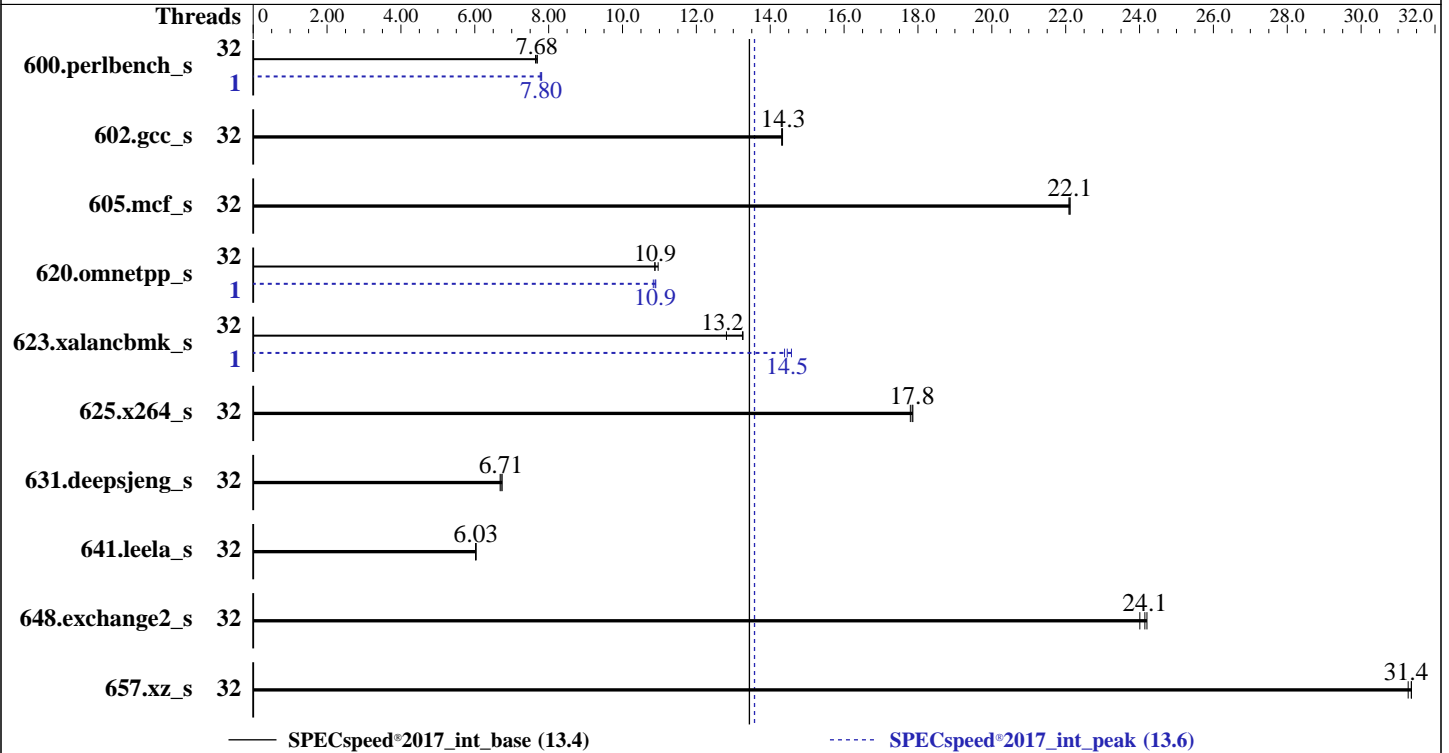

Hardware

CPU Name: AMD EPYC 7373X
 Max MHz: 3800
 Nominal: 3050
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 768 MB I+D on chip per chip, 96 MB shared / 2 cores
 Other: None
 Memory: 1 TB (16 x 64 GB 4Rx4 PC4-3200AA-L)
 Storage: 1 x 240 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP2 (x86_64)
 Kernel 5.3.18-22-default
 Compiler: C/C++/Fortran: Version 3.2.0 of AOCC
 Parallel: Yes
 Firmware: Version 0802 released Oct-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
3.05 GHz, AMD EPYC 7373X

SPECspeed®2017_int_base = 13.4

SPECspeed®2017_int_peak = 13.6

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|---------|-------------------|--------------------|-------------------|--------------------|--------------------|--------------------|---------|--------------------|--------------------|-------------------|--------------------|--------------------|--------------------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 32 | 232 | 7.64 | 231 | 7.69 | <u>231</u> | <u>7.68</u> | 1 | 228 | 7.77 | 227 | 7.81 | <u>228</u> | <u>7.80</u> |
| 602.gcc_s | 32 | 278 | 14.3 | <u>278</u> | <u>14.3</u> | 278 | 14.3 | 32 | 278 | 14.3 | <u>278</u> | <u>14.3</u> | 278 | 14.3 |
| 605.mcf_s | 32 | 213 | 22.1 | 214 | 22.1 | <u>214</u> | <u>22.1</u> | 32 | 213 | 22.1 | 214 | 22.1 | <u>214</u> | <u>22.1</u> |
| 620.omnetpp_s | 32 | 150 | 10.9 | 149 | 11.0 | <u>150</u> | <u>10.9</u> | 1 | <u>150</u> | <u>10.9</u> | 151 | 10.8 | 150 | 10.9 |
| 623.xalancbmk_s | 32 | <u>107</u> | <u>13.2</u> | 107 | 13.3 | 111 | 12.8 | 1 | <u>98.0</u> | <u>14.5</u> | 98.5 | 14.4 | 97.2 | 14.6 |
| 625.x264_s | 32 | 99.1 | 17.8 | 98.8 | 17.9 | <u>98.9</u> | <u>17.8</u> | 32 | 99.1 | 17.8 | 98.8 | 17.9 | <u>98.9</u> | <u>17.8</u> |
| 631.deepsjeng_s | 32 | 213 | 6.74 | <u>214</u> | <u>6.71</u> | 214 | 6.69 | 32 | 213 | 6.74 | <u>214</u> | <u>6.71</u> | 214 | 6.69 |
| 641.leela_s | 32 | 283 | 6.02 | 283 | 6.03 | <u>283</u> | <u>6.03</u> | 32 | 283 | 6.02 | 283 | 6.03 | <u>283</u> | <u>6.03</u> |
| 648.exchange2_s | 32 | <u>122</u> | <u>24.1</u> | 122 | 24.0 | 121 | 24.2 | 32 | <u>122</u> | <u>24.1</u> | 122 | 24.0 | 121 | 24.2 |
| 657.xz_s | 32 | <u>197</u> | <u>31.4</u> | 197 | 31.4 | 198 | 31.3 | 32 | <u>197</u> | <u>31.4</u> | 197 | 31.4 | 198 | 31.3 |

SPECspeed®2017_int_base = **13.4**

SPECspeed®2017_int_peak = **13.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
OS set to performance mode via cpupower frequency-set -g performance

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
3.05 GHz, AMD EPYC 7373X

SPECspeed®2017_int_base = 13.4

SPECspeed®2017_int_peak = 13.6

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-63"

LD_LIBRARY_PATH =

"/spec2017/amd_speed_aocc320_milanx_A_lib/lib:/spec2017/amd_speed_aocc320_milanx_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "64"

Environment variables set by runcpu during the 600.perlbench_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalanbmk_s peak run:

GOMP_CPU_AFFINITY = "0"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using opensUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
3.05 GHz, AMD EPYC 7373X

SPECspeed®2017_int_base = 13.4

SPECspeed®2017_int_peak = 13.6

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Platform Notes

BIOS Configuration:
DLWM Support = Disabled
SVM Mode = Disabled
NUMA nodes per socket = NPS2
APBDIS = 1
Fix SOC P-state = P0
Engine Boost = Enabled

Sysinfo program /spec2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost Tue Mar 22 16:52:04 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : AMD EPYC 7373X 16-Core Processor
2 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu from util-linux 2.33.1:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 64
On-line CPU(s) list: 0-63
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s): 2
NUMA node(s): 4
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 7373X 16-Core Processor
Stepping: 2
CPU MHz: 1631.118
CPU max MHz: 3050.0000
CPU min MHz: 1500.0000
BogoMIPS: 6088.64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
3.05 GHz, AMD EPYC 7373X

SPECspeed®2017_int_base = 13.4

SPECspeed®2017_int_peak = 13.6

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Platform Notes (Continued)

```

Virtualization:      AMD-V
L1d cache:          32K
L1i cache:          32K
L2 cache:           512K
L3 cache:           98304K
NUMA node0 CPU(s): 0-7,32-39
NUMA node1 CPU(s): 8-15,40-47
NUMA node2 CPU(s): 16-23,48-55
NUMA node3 CPU(s): 24-31,56-63
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase
bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif
umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 32 33 34 35 36 37 38 39
node 0 size: 257844 MB
node 0 free: 257369 MB
node 1 cpus: 8 9 10 11 12 13 14 15 40 41 42 43 44 45 46 47
node 1 size: 258029 MB
node 1 free: 257588 MB
node 2 cpus: 16 17 18 19 20 21 22 23 48 49 50 51 52 53 54 55
node 2 size: 258041 MB
node 2 free: 257799 MB
node 3 cpus: 24 25 26 27 28 29 30 31 56 57 58 59 60 61 62 63
node 3 size: 258007 MB
node 3 free: 257783 MB
node distances:
node  0  1  2  3
0:  10 12 32 32
1:  12 10 32 32
2:  32 32 10 12
3:  32 32 12 10

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
3.05 GHz, AMD EPYC 7373X

SPECspeed®2017_int_base = 13.4

SPECspeed®2017_int_peak = 13.6

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Platform Notes (Continued)

From /proc/meminfo

MemTotal: 1056689408 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*

os-release:

NAME="SLES"

VERSION="15-SP2"

VERSION_ID="15.2"

PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"

ID="sles"

ID_LIKE="suse"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:15:sp2"

uname -a:

Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64
x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

| | |
|--|---|
| CVE-2018-12207 (iTLB Multihit): | Not affected |
| CVE-2018-3620 (L1 Terminal Fault): | Not affected |
| Microarchitectural Data Sampling: | Not affected |
| CVE-2017-5754 (Meltdown): | Not affected |
| CVE-2018-3639 (Speculative Store Bypass): | Mitigation: Speculative Store Bypass disabled via prctl and seccomp |
| CVE-2017-5753 (Spectre variant 1): | Mitigation: usercopy/swapgs barriers and __user pointer sanitization |
| CVE-2017-5715 (Spectre variant 2): | Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling |
| CVE-2020-0543 (Special Register Buffer Data Sampling): | Not affected |
| CVE-2019-11135 (TSX Asynchronous Abort): | Not affected |

run-level 3 Mar 22 16:51

SPEC is set to: /spec2017

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|------------|------|------|------|-------|------|------------|
| /dev/sda4 | xf | 199G | 56G | 144G | 28% | / |

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
3.05 GHz, AMD EPYC 7373X

SPECspeed®2017_int_base = 13.4

SPECspeed®2017_int_peak = 13.6

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Platform Notes (Continued)

```
From /sys/devices/virtual/dmi/id
Vendor:      ASUSTeK COMPUTER INC.
Product:     RS720A-E11-RS12E
Product Family: Server
Serial:      123456789012
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
 16x Samsung M386A8K40DM2-CWE 64 GB 4 rank 3200
 16x Unknown Unknown
```

```
BIOS:
 BIOS Vendor:    American Megatrends Inc.
 BIOS Version:   0802
 BIOS Date:      10/21/2021
 BIOS Revision:  8.2
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
C          | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,  
          | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)  
=====
```

```
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on  
LLVM Mirror.Version.13.0.0)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
=====
```

```
=====  
C++       | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)  
       | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)  
=====
```

```
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on  
LLVM Mirror.Version.13.0.0)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
=====
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
3.05 GHz, AMD EPYC 7373X

SPECspeed®2017_int_base = 13.4

SPECspeed®2017_int_peak = 13.6

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Compiler Version Notes (Continued)

=====
Fortran | 648.exchange2_s(base, peak)
=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
=====

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64

602.gcc_s: -DSPEC_LP64

605.mcf_s: -DSPEC_LP64

620.omnetpp_s: -DSPEC_LP64

623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64

625.x264_s: -DSPEC_LP64

631.deepsjeng_s: -DSPEC_LP64

641.leela_s: -DSPEC_LP64

648.exchange2_s: -DSPEC_LP64

657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp

-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
3.05 GHz, AMD EPYC 7373X

SPECspeed®2017_int_base = 13.4

SPECspeed®2017_int_peak = 13.6

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-inline-aggressive -flv-function-specialization
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp=true
-mllvm -convert-pow-exp-to-int=false -z muldefs
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -z muldefs
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

C++ benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
3.05 GHz, AMD EPYC 7373X

SPECspeed®2017_int_base = 13.4

SPECspeed®2017_int_peak = 13.6

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

602.gcc_s: basepeak = yes

605.mcf_s: basepeak = yes

625.x264_s: basepeak = yes

657.xz_s: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
3.05 GHz, AMD EPYC 7373X

SPECspeed®2017_int_base = 13.4

SPECspeed®2017_int_peak = 13.6

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Peak Optimization Flags (Continued)

```
620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System
3.05 GHz, AMD EPYC 7373X

SPECspeed®2017_int_base = 13.4

SPECspeed®2017_int_peak = 13.6

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Mar-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

Peak Other Flags (Continued)

Fortran benchmarks:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-Milan-V1.6.html>

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-Milan-V1.6.xml>

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-03-22 04:52:04-0400.

Report generated on 2022-05-10 19:11:49 by CPU2017 PDF formatter v6442.

Originally published on 2022-05-10.