



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7262 8-core) Processor)

SPECrate®2017\_int\_base = 130

SPECrate®2017\_int\_peak = 137

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2022

Hardware Availability: Aug-2021

Software Availability: Dec-2021

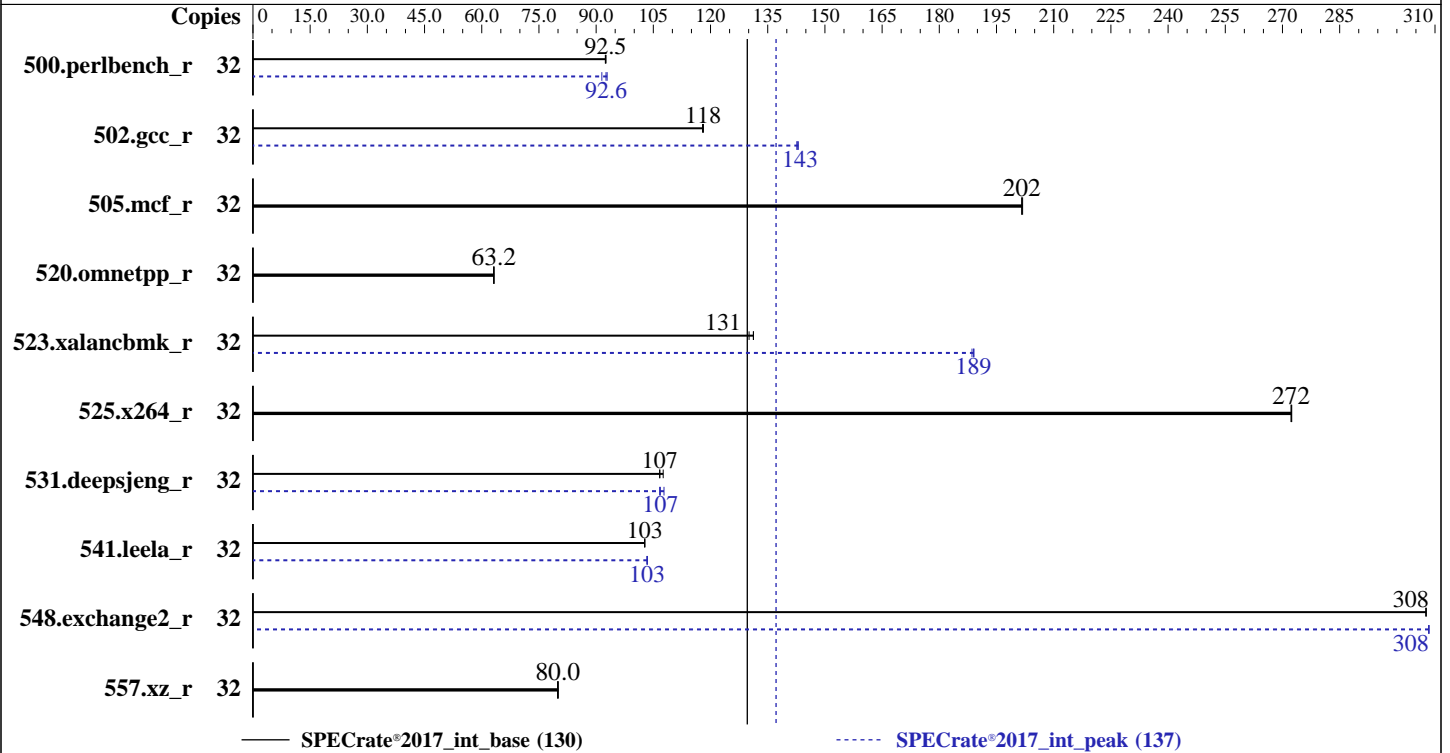

### Hardware

CPU Name: AMD EPYC 7262  
 Max MHz: 3400  
 Nominal: 3200  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 128 MB I+D on chip per chip, 16 MB per core  
 Other: None  
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200AA-L, running at 1600)  
 Storage: 1 x 960 GB M.2 SSD SATA  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP2 (x86\_64) kernel version 5.3.18-22-default  
 Compiler: C/C++/Fortran: Version 3.2.0 of AOCC  
 Parallel: No  
 Firmware: Version 4.2.1 released Feb-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7262 8-core)  
Processor)

SPECrate®2017\_int\_base = 130

SPECrate®2017\_int\_peak = 137

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Jun-2022  
**Hardware Availability:** Aug-2021  
**Software Availability:** Dec-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	551	92.4	<b><u>551</u></b>	<b><u>92.5</u></b>	550	92.6	32	<b><u>550</u></b>	<b><u>92.6</u></b>	548	92.9	557	91.5
502.gcc_r	32	384	118	<b><u>384</u></b>	<b><u>118</u></b>	384	118	32	317	143	318	143	<b><u>317</u></b>	<b><u>143</u></b>
505.mcf_r	32	256	202	256	202	<b><u>256</u></b>	<b><u>202</u></b>	32	256	202	256	202	<b><u>256</u></b>	<b><u>202</u></b>
520.omnetpp_r	32	665	63.1	664	63.2	<b><u>664</u></b>	<b><u>63.2</u></b>	32	665	63.1	664	63.2	<b><u>664</u></b>	<b><u>63.2</u></b>
523.xalancbmk_r	32	<b><u>257</u></b>	<b><u>131</u></b>	257	131	260	130	32	<b><u>179</u></b>	<b><u>189</u></b>	179	189	179	189
525.x264_r	32	206	272	<b><u>206</u></b>	<b><u>272</u></b>	206	272	32	206	272	<b><u>206</u></b>	<b><u>272</u></b>	206	272
531.deepsjeng_r	32	<b><u>344</u></b>	<b><u>107</u></b>	344	107	341	108	32	<b><u>343</u></b>	<b><u>107</u></b>	344	107	340	108
541.leela_r	32	516	103	<b><u>516</u></b>	<b><u>103</u></b>	516	103	32	<b><u>512</u></b>	<b><u>103</u></b>	512	103	513	103
548.exchange2_r	32	272	308	273	308	<b><u>273</u></b>	<b><u>308</u></b>	32	272	308	272	308	<b><u>272</u></b>	<b><u>308</u></b>
557.xz_r	32	<b><u>432</u></b>	<b><u>80.0</u></b>	432	80.1	433	79.9	32	<b><u>432</u></b>	<b><u>80.0</u></b>	432	80.1	433	79.9

SPECrate®2017\_int\_base = 130

SPECrate®2017\_int\_peak = 137

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7262 8-core)  
Processor)

SPECrate®2017\_int\_base = 130

SPECrate®2017\_int\_peak = 137

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jun-2022

**Hardware Availability:** Aug-2021

**Software Availability:** Dec-2021

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017/amd\_rate\_aocc320\_milanx\_A\_lib/lib:/home/cpu2017/amd\_rate\_  
aocc320\_milanx\_A\_lib/lib32:"  
MALLOC\_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalanbmk\_r peak run:  
MALLOC\_CONF = "thp:never"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)  
jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS Configuration  
SMT Mode set to Enabled  
NUMA nodes per socket set to NPS4  
ACPI SRAT L3 Cache As NUMA Domain set to Enabled  
DRAM Scrub Time set to Disabled  
Determinism Slider set to Power  
Memory Interleaving set to Disabled  
APBDIS set to 1

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7262 8-core Processor)

SPECrate®2017\_int\_base = 130

SPECrate®2017\_int\_peak = 137

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jun-2022

**Hardware Availability:** Aug-2021

**Software Availability:** Dec-2021

## Platform Notes (Continued)

sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost Fri Jun 10 22:20:40 2022

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7262 8-Core Processor
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 8
siblings : 16
physical 0: cores 0 4 8 12 16 20 24 28
physical 1: cores 0 4 8 12 16 20 24 28
```

From lscpu from util-linux 2.33.1:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         43 bits physical, 48 bits virtual
CPU(s):                32
On-line CPU(s) list:  0-31
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):             2
NUMA node(s):         16
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 49
Model name:            AMD EPYC 7262 8-Core Processor
Stepping:              0
CPU MHz:               1796.481
CPU max MHz:           3200.0000
CPU min MHz:           1500.0000
BogoMIPS:              6387.77
Virtualization:       AMD-V
L1d cache:             32K
L1i cache:             32K
L2 cache:              512K
L3 cache:              16384K
NUMA node0 CPU(s):    0,16
NUMA node1 CPU(s):    1,17
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7262 8-core)  
Processor)

SPECrate®2017\_int\_base = 130

SPECrate®2017\_int\_peak = 137

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jun-2022

**Hardware Availability:** Aug-2021

**Software Availability:** Dec-2021

### Platform Notes (Continued)

```

NUMA node2 CPU(s): 2,18
NUMA node3 CPU(s): 3,19
NUMA node4 CPU(s): 4,20
NUMA node5 CPU(s): 5,21
NUMA node6 CPU(s): 6,22
NUMA node7 CPU(s): 7,23
NUMA node8 CPU(s): 8,24
NUMA node9 CPU(s): 9,25
NUMA node10 CPU(s): 10,26
NUMA node11 CPU(s): 11,27
NUMA node12 CPU(s): 12,28
NUMA node13 CPU(s): 13,29
NUMA node14 CPU(s): 14,30
NUMA node15 CPU(s): 15,31

```

```

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs
skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
cdp_l3 hwpstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bml avx2 smep
bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd
arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor
smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0 16
node 0 size: 128840 MB
node 0 free: 128092 MB
node 1 cpus: 1 17
node 1 size: 129022 MB
node 1 free: 128403 MB
node 2 cpus: 2 18
node 2 size: 129023 MB
node 2 free: 128366 MB
node 3 cpus: 3 19
node 3 size: 129022 MB
node 3 free: 128348 MB
node 4 cpus: 4 20
node 4 size: 129023 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7262 8-core)  
Processor)

SPECrate®2017\_int\_base = 130

SPECrate®2017\_int\_peak = 137

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jun-2022

**Hardware Availability:** Aug-2021

**Software Availability:** Dec-2021

### Platform Notes (Continued)

```

node 4 free: 128411 MB
node 5 cpus: 5 21
node 5 size: 129022 MB
node 5 free: 128412 MB
node 6 cpus: 6 22
node 6 size: 129023 MB
node 6 free: 128418 MB
node 7 cpus: 7 23
node 7 size: 129010 MB
node 7 free: 128397 MB
node 8 cpus: 8 24
node 8 size: 129023 MB
node 8 free: 128408 MB
node 9 cpus: 9 25
node 9 size: 129022 MB
node 9 free: 128390 MB
node 10 cpus: 10 26
node 10 size: 129023 MB
node 10 free: 128412 MB
node 11 cpus: 11 27
node 11 size: 129022 MB
node 11 free: 128400 MB
node 12 cpus: 12 28
node 12 size: 129023 MB
node 12 free: 128408 MB
node 13 cpus: 13 29
node 13 size: 129022 MB
node 13 free: 128405 MB
node 14 cpus: 14 30
node 14 size: 129023 MB
node 14 free: 128413 MB
node 15 cpus: 15 31
node 15 size: 128988 MB
node 15 free: 128366 MB

```

node distances:

```

node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32
1:  11 10 12 12 12 12 12 12 32 32 32 32 32 32 32 32
2:  12 12 10 11 12 12 12 12 32 32 32 32 32 32 32 32
3:  12 12 11 10 12 12 12 12 32 32 32 32 32 32 32 32
4:  12 12 12 12 10 11 12 12 32 32 32 32 32 32 32 32
5:  12 12 12 12 11 10 12 12 32 32 32 32 32 32 32 32
6:  12 12 12 12 12 12 10 11 32 32 32 32 32 32 32 32
7:  12 12 12 12 12 12 11 10 32 32 32 32 32 32 32 32
8:  32 32 32 32 32 32 32 32 10 11 12 12 12 12 12 12
9:  32 32 32 32 32 32 32 32 11 10 12 12 12 12 12 12
10: 32 32 32 32 32 32 32 32 12 12 10 11 12 12 12 12

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7262 8-core) Processor)

SPECrate®2017\_int\_base = 130

SPECrate®2017\_int\_peak = 137

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2022

Hardware Availability: Aug-2021

Software Availability: Dec-2021

### Platform Notes (Continued)

11:	32	32	32	32	32	32	32	32	12	12	11	10	12	12	12	12
12:	32	32	32	32	32	32	32	32	12	12	12	12	10	11	12	12
13:	32	32	32	32	32	32	32	32	12	12	12	12	11	10	12	12
14:	32	32	32	32	32	32	32	32	12	12	12	12	12	12	10	11
15:	32	32	32	32	32	32	32	32	12	12	12	12	12	12	11	10

From /proc/meminfo

MemTotal: 2113672408 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="SLES"

VERSION="15-SP2"

VERSION\_ID="15.2"

PRETTY\_NAME="SUSE Linux Enterprise Server 15 SP2"

ID="sles"

ID\_LIKE="suse"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:15:sp2"

uname -a:

Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7262 8-core Processor)

SPECrate®2017\_int\_base = 130

SPECrate®2017\_int\_peak = 137

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Jun-2022  
**Hardware Availability:** Aug-2021  
**Software Availability:** Dec-2021

### Platform Notes (Continued)

run-level 3 Apr 17 06:12

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfst	223G	17G	207G	8%	/

From /sys/devices/virtual/dmi/id  
**Vendor:** Cisco Systems Inc  
**Product:** To

Additional information from dmidecode 3.2 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

**Memory:**  
16x 0xCE00 M386AAG40AM3-CWE 128 GB 4 rank 3200, configured at 1600  
16x Unknown Unknown

**BIOS:**  
**BIOS Vendor:** Cisco Systems, Inc.  
**BIOS Version:** C225M6.4.2.1.30.0221222139  
**BIOS Date:** 02/21/2022  
**BIOS Revision:** 5.14

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 502.gcc\_r(peak)

-----  
AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

-----  
AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7262 8-core)  
Processor)

SPECrate®2017\_int\_base = 130

SPECrate®2017\_int\_peak = 137

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jun-2022

**Hardware Availability:** Aug-2021

**Software Availability:** Dec-2021

### Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====  
C | 502.gcc\_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====  
C++ | 523.xalancbmk\_r(peak)

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====  
C++ | 523.xalancbmk\_r(peak)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7262 8-core)  
Processor)

SPECrate®2017\_int\_base = 130

SPECrate®2017\_int\_peak = 137

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jun-2022

**Hardware Availability:** Aug-2021

**Software Availability:** Dec-2021

## Compiler Version Notes (Continued)

```
-----
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----
```

```
=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
         | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----
```

```
-----
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----
```

```
=====
Fortran  | 548.exchange2_r(base, peak)
-----
```

```
-----
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
-----
```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7262 8-core)  
Processor)

SPECrate®2017\_int\_base = 130

SPECrate®2017\_int\_peak = 137

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jun-2022

**Hardware Availability:** Aug-2021

**Software Availability:** Dec-2021

## Base Portability Flags (Continued)

```
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang
```

### C++ benchmarks:

```
-m64 -std=c++98 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-mllvm -enable-loop-fusion -z muldefs -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -ljemalloc -lflang
```

### Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7262 8-core Processor)

SPECrate®2017\_int\_base = 130

SPECrate®2017\_int\_peak = 137

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jun-2022

**Hardware Availability:** Aug-2021

**Software Availability:** Dec-2021

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
```

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
```

```
505.mcf_r: -DSPEC_LP64
```

```
520.omnetpp_r: -DSPEC_LP64
```

```
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
```

```
525.x264_r: -DSPEC_LP64
```

```
531.deepsjeng_r: -DSPEC_LP64
```

```
541.leela_r: -DSPEC_LP64
```

```
548.exchange2_r: -DSPEC_LP64
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7262 8-core Processor)

SPECrate®2017\_int\_base = 130

SPECrate®2017\_int\_peak = 137

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jun-2022

**Hardware Availability:** Aug-2021

**Software Availability:** Dec-2021

## Peak Portability Flags (Continued)

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

```
502.gcc_r: -m32 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc
```

505.mcf\_r: basepeak = yes

525.x264\_r: basepeak = yes

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

```
523.xalancbmk_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7262 8-core)  
Processor)

SPECrate®2017\_int\_base = 130

SPECrate®2017\_int\_peak = 137

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jun-2022

**Hardware Availability:** Aug-2021

**Software Availability:** Dec-2021

## Peak Optimization Flags (Continued)

523.xalancbmk\_r (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-ljemalloc
```

531.deepsjeng\_r: -m64 -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -ljemalloc
```

541.leela\_r: Same as 531.deepsjeng\_r

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang
```

## Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

502.gcc\_r: -L/usr/lib -Wno-unused-command-line-argument

```
-L/sppo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7262 8-core)  
Processor)

SPECrate®2017\_int\_base = 130

SPECrate®2017\_int\_peak = 137

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jun-2022

**Hardware Availability:** Aug-2021

**Software Availability:** Dec-2021

## Peak Other Flags (Continued)

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk\_r: -L/usr/lib -Wno-unused-command-line-argument

-L/sppo/bin/cpu2017v118-aocc3-milanX/amd\_rate\_aocc320\_milanx\_A\_lib/lib32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revD.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-06-11 01:20:39-0400.

Report generated on 2022-08-02 17:45:04 by CPU2017 PDF formatter v6442.

Originally published on 2022-08-02.