



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Platinum 8268, 2.90 GHz)

SPECrate®2017_int_base = 672

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2022

Hardware Availability: Aug-2019

Software Availability: May-2022

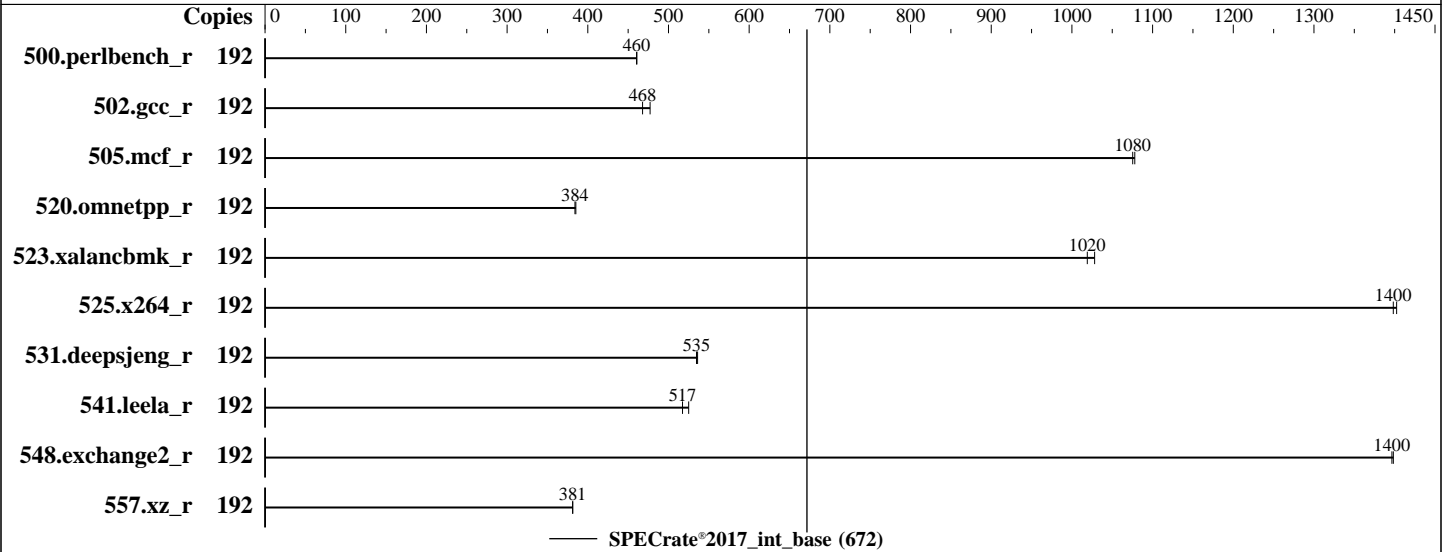

Hardware

CPU Name: Intel Xeon Platinum 8268
 Max MHz: 3900
 Nominal: 2900
 Enabled: 96 cores, 4 chips, 2 threads/core
 Orderable: 1,2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC4-3200AA-R, running at 2933)
 Storage: 125 GB on tmpfs
 Other: None

Software

OS: Red Hat Enterprise Linux 8.6 (Ootpa)
 4.18.0-372.9.1.el8.x86_64
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 2.16.1 released Aug-2022
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Platinum 8268, 2.90 GHz)

SPECrate®2017_int_base = 672

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2022
Hardware Availability: Aug-2019
Software Availability: May-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	664	460	663	461									
502.gcc_r	192	570	477	581	468									
505.mcf_r	192	289	1080	288	1080									
520.omnetpp_r	192	654	385	656	384									
523.xalancbmk_r	192	199	1020	197	1030									
525.x264_r	192	240	1400	240	1400									
531.deepsjeng_r	192	410	536	411	535									
541.leela_r	192	606	525	615	517									
548.exchange2_r	192	360	1400	360	1400									
557.xz_r	192	544	381	544	381									

SPECrate®2017_int_base = 672

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.8-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.8-ic2022.1/lib/ia32:/mnt/ramdisk/cpu2017-1.1.8-ic2022.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Platinum 8268, 2.90 GHz)

SPECrate®2017_int_base = 672

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2022

Hardware Availability: Aug-2019

Software Availability: May-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3> /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

Sub NUMA Cluster : Enabled
 Virtualization Technology : Disabled

System Profile : Custom
 CPU Power Management : Maximum Performance
 CIE : Disabled
 C States : Autonomous
 Memory Patrol Scrub : Disabled
 Energy Efficiency Policy : Performance

CPU Interconnect Bus Link
 Power Management : Disabled
 PCI ASPM L1 Link
 Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-ic2022.1/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost.localdomain Thu Dec 8 16:48:07 2022

SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8268 CPU @ 2.90GHz
 4 "physical id"s (chips)
192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 24
siblings       : 48
physical 0:    : cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
physical 1:    : cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
physical 2:    : cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 3:    : cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
```

From lscpu from util-linux 2.32.1:
 Architecture: x86_64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Platinum 8268, 2.90 GHz)

SPECrate®2017_int_base = 672

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2022
Hardware Availability: Aug-2019
Software Availability: May-2022

Platform Notes (Continued)

```

CPU op-mode(s):      32-bit, 64-bit
Byte Order:          Little Endian
CPU(s):              192
On-line CPU(s) list: 0-191
Thread(s) per core:  2
Core(s) per socket: 24
Socket(s):           4
NUMA node(s):        8
Vendor ID:           GenuineIntel
BIOS Vendor ID:      Intel
CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Platinum 8268 CPU @ 2.90GHz
BIOS Model name:      Intel(R) Xeon(R) Platinum 8268 CPU @ 2.90GHz
Stepping:             7
CPU MHz:              3900.000
CPU max MHz:          3900.0000
CPU min MHz:          1200.0000
BogoMIPS:             5800.00
L1d cache:           32K
L1i cache:           32K
L2 cache:             1024K
L3 cache:             36608K
NUMA node0 CPU(s):   0, 8, 16, 24, 32, 40, 48, 56, 64, 72, 80, 88, 96, 104, 112, 120, 128, 136, 144, 152, 160, 168, 176, 184
NUMA node1 CPU(s):   1, 9, 17, 25, 33, 41, 49, 57, 65, 73, 81, 89, 97, 105, 113, 121, 129, 137, 145, 153, 161, 169, 177, 185
NUMA node2 CPU(s):   2, 10, 18, 26, 34, 42, 50, 58, 66, 74, 82, 90, 98, 106, 114, 122, 130, 138, 146, 154, 162, 170, 178, 186
NUMA node3 CPU(s):   3, 11, 19, 27, 35, 43, 51, 59, 67, 75, 83, 91, 99, 107, 115, 123, 131, 139, 147, 155, 163, 171, 179, 187
NUMA node4 CPU(s):   4, 12, 20, 28, 36, 44, 52, 60, 68, 76, 84, 92, 100, 108, 116, 124, 132, 140, 148, 156, 164, 172, 180, 188
NUMA node5 CPU(s):   5, 13, 21, 29, 37, 45, 53, 61, 69, 77, 85, 93, 101, 109, 117, 125, 133, 141, 149, 157, 165, 173, 181, 189
NUMA node6 CPU(s):   6, 14, 22, 30, 38, 46, 54, 62, 70, 78, 86, 94, 102, 110, 118, 126, 134, 142, 150, 158, 166, 174, 182, 190
NUMA node7 CPU(s):   7, 15, 23, 31, 39, 47, 55, 63, 71, 79, 87, 95, 103, 111, 119, 127, 135, 143, 151, 159, 167, 175, 183, 191
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl smx est tm2 sse3 sdbg fma cx16 xtpr
pdc m pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 avx2 smep
bmi2 erms invpcid cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb
intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
avx512_vnni md_clear flush_lld arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88 96 104 112 120 128 136 144 152 160 168
176 184
node 0 size: 94882 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Platinum 8268, 2.90 GHz)

SPECrate®2017_int_base = 672

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2022

Hardware Availability: Aug-2019

Software Availability: May-2022

Platform Notes (Continued)

```

node 0 free: 94120 MB
node 1 cpus: 1 9 17 25 33 41 49 57 65 73 81 89 97 105 113 121 129 137 145 153 161 169
177 185
node 1 size: 96762 MB
node 1 free: 93869 MB
node 2 cpus: 2 10 18 26 34 42 50 58 66 74 82 90 98 106 114 122 130 138 146 154 162 170
178 186
node 2 size: 96762 MB
node 2 free: 95880 MB
node 3 cpus: 3 11 19 27 35 43 51 59 67 75 83 91 99 107 115 123 131 139 147 155 163 171
179 187
node 3 size: 96762 MB
node 3 free: 95857 MB
node 4 cpus: 4 12 20 28 36 44 52 60 68 76 84 92 100 108 116 124 132 140 148 156 164 172
180 188
node 4 size: 96762 MB
node 4 free: 96303 MB
node 5 cpus: 5 13 21 29 37 45 53 61 69 77 85 93 101 109 117 125 133 141 149 157 165 173
181 189
node 5 size: 96762 MB
node 5 free: 96255 MB
node 6 cpus: 6 14 22 30 38 46 54 62 70 78 86 94 102 110 118 126 134 142 150 158 166 174
182 190
node 6 size: 96720 MB
node 6 free: 95990 MB
node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95 103 111 119 127 135 143 151 159 167 175
183 191
node 7 size: 96752 MB
node 7 free: 93267 MB
node distances:
node 0 1 2 3 4 5 6 7
0: 10 21 21 21 11 21 21 21
1: 21 10 21 21 21 11 21 21
2: 21 21 10 21 21 21 11 21
3: 21 21 21 10 21 21 21 11
4: 11 21 21 21 10 21 21 21
5: 21 11 21 21 21 10 21 21
6: 21 21 11 21 21 21 10 21
7: 21 21 21 11 21 21 21 10

```

```

From /proc/meminfo
MemTotal: 790701544 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

/sbin/tuned-adm active
Current active profile: throughput-performance

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.6 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.6"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.6 (Ootpa)"

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Platinum 8268, 2.90 GHz)

SPECrate®2017_int_base = 672

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2022
Hardware Availability: Aug-2019
Software Availability: May-2022

Platform Notes (Continued)

```

ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.6 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.6 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8::baseos

uname -a:
Linux localhost.localdomain 4.18.0-372.9.1.el8.x86_64 #1 SMP Fri Apr 15 22:12:19 EDT
2022 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):          KVM: Mitigation: VMX unsupported
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
                                           Bypass disabled via prctl and
                                           seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swapgs
                                           barriers and __user pointer
                                           sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Enhanced IBRS, IBPB:
                                           conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Mitigation: TSX disabled

run-level 3 Dec 8 16:22

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-ic2022.1
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs           tmpfs 125G  3.6G 122G   3% /mnt/ramdisk

From /sys/devices/virtual/dmi/id
Vendor:         Dell Inc.
Product:        PowerEdge R940xa
Product Family: PowerEdge
Serial:         FRKY0Q2

Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
 24x 00CE063200CE M393A4G43AB3-CWE 32 GB 2 rank 3200, configured at 2933

BIOS:
  BIOS Vendor:         Dell Inc.
  BIOS Version:        2.16.1
  BIOS Date:           08/19/2022
  BIOS Revision:       2.16

(End of data from sysinfo program)

```

Compiler Version Notes

```

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Platinum 8268, 2.90 GHz)

SPECrate®2017_int_base = 672

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2022
Hardware Availability: Aug-2019
Software Availability: May-2022

Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Platinum 8268, 2.90 GHz)

SPECrate®2017_int_base = 672

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2022

Hardware Availability: Aug-2019

Software Availability: May-2022

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-08 16:48:07-0500.

Report generated on 2024-01-29 17:18:11 by CPU2017 PDF formatter v6716.

Originally published on 2023-01-17.