



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_fp_base = 158

Express5800/R120i-1M (Intel Xeon Silver 4316)

SPECspeed®2017_fp_peak = 161

CPU2017 License: 9006


Test Date: Jul-2021

Test Sponsor: NEC Corporation

Hardware Availability: Jul-2021

Tested by: NEC Corporation

Software Availability: Dec-2020

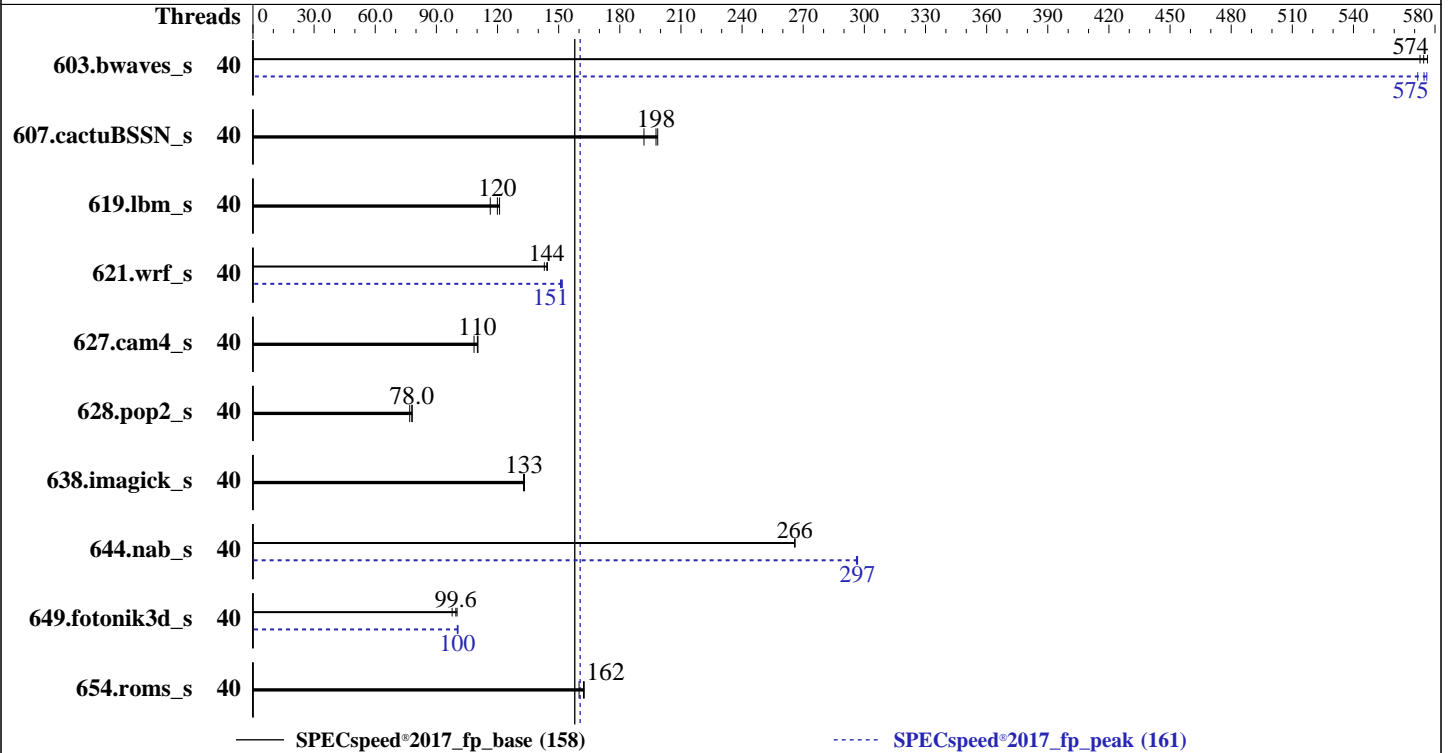

Hardware

CPU Name: Intel Xeon Silver 4316
 Max MHz: 3400
 Nominal: 2300
 Enabled: 40 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 30 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx4 PC4-3200AA-R, running at 2666)
 Storage: 1 x 800 GB SAS SSD, RAID 0
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.3 (Ootpa) 4.18.0-240.el8.x86_64
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
 Parallel: Yes
 Firmware: NEC BIOS Version U46 v1.40 04/28/2021 released Jul-2021
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to balance power and performance.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

SPECSpeed®2017_fp_base = 158

Express5800/R120i-1M (Intel Xeon Silver 4316)

SPECSpeed®2017_fp_peak = 161

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Jul-2021
Hardware Availability: Jul-2021
Software Availability: Dec-2020

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	40	103	574	103	573	102	576	40	102	576	103	575	103	572
607.cactuBSSN_s	40	86.9	192	84.3	198	83.9	199	40	86.9	192	84.3	198	83.9	199
619.lbm_s	40	43.7	120	43.3	121	45.0	116	40	43.7	120	43.3	121	45.0	116
621.wrf_s	40	91.7	144	91.5	145	92.5	143	40	87.7	151	87.1	152	87.4	151
627.cam4_s	40	80.5	110	81.7	108	80.3	110	40	80.5	110	81.7	108	80.3	110
628.pop2_s	40	152	78.2	154	76.9	152	78.0	40	152	78.2	154	76.9	152	78.0
638.imagick_s	40	109	133	108	133	108	133	40	109	133	108	133	108	133
644.nab_s	40	65.7	266	65.7	266	65.7	266	40	59.0	296	58.9	297	58.9	297
649.fotonik3d_s	40	91.0	100	93.3	97.7	91.6	99.6	40	90.6	101	90.8	100	90.9	100
654.roms_s	40	97.1	162	98.4	160	96.9	163	40	97.1	162	98.4	160	96.9	163

SPECSpeed®2017_fp_base = **158**

SPECSpeed®2017_fp_peak = **161**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical software and/or firmware described on this result page.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_fp_base = 158

Express5800/R120i-1M (Intel Xeon Silver 4316)

SPECspeed®2017_fp_peak = 161

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jul-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

General Notes (Continued)

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>. This measured result may not be representative of the result that would be measured were this benchmark run with software and firmware available as of the publication date.

Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Thermal Configuration: Maximum Cooling
Workload Profile: General Peak Frequency Compute
Intel Hyper-Threading: Disabled
Advanced Memory Protection: Advanced ECC Support
Memory Patrol Scrubbing: Disabled
Minimum Processor Idle Power Core C-State: C6 State
LLC Dead Line Allocation: Disabled
LLC Prefetch: Enabled
Enhanced Processor Performance: Enabled
Workload Profile: Custom
Minimum Processor Idle Power Package C-State: No Package State
Energy/Performance Bias: Balanced Power
Adjacent Sector Prefetch: Disabled
DCU Stream Prefetcher: Disabled
Numa Group Size Optimization: Flat

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on r120ilm Thu Jul 29 14:05:53 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Silver 4316 CPU @ 2.30GHz

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_fp_base = 158

Express5800/R120i-1M (Intel Xeon Silver 4316)

SPECspeed®2017_fp_peak = 161

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Jul-2021
Hardware Availability: Jul-2021
Software Availability: Dec-2020

Platform Notes (Continued)

```
2 "physical id"s (chips)
40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 20
siblings : 20
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19
```

From lscpu from util-linux 2.32.1:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 40
On-line CPU(s) list: 0-39
Thread(s) per core: 1
Core(s) per socket: 20
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Silver 4316 CPU @ 2.30GHz
Stepping: 6
CPU MHz: 3322.216
BogoMIPS: 4600.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 30720K
NUMA node0 CPU(s): 0-19
NUMA node1 CPU(s): 20-39
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d arch_capabilities
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_fp_base = 158

Express5800/R120i-1M (Intel Xeon Silver 4316)

SPECspeed®2017_fp_peak = 161

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jul-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 30720 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19
node 0 size: 499161 MB
node 0 free: 514287 MB
node 1 cpus: 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39
node 1 size: 499900 MB
node 1 free: 509237 MB
node distances:
node  0  1
  0:  10  20
  1:  20  10
```

```
From /proc/meminfo
MemTotal:      1056529220 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/sbin/tuned-adm active
Current active profile: throughput-performance
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga
```

```
uname -a:
Linux r120i1m 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):      Not affected
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_fp_base = 158

Express5800/R120i-1M (Intel Xeon Silver 4316)

SPECspeed®2017_fp_peak = 161

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Jul-2021
Hardware Availability: Jul-2021
Software Availability: Dec-2020

Platform Notes (Continued)

Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Jul 29 09:57

```

SPEC is set to: /home/cpu2017
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/sda3       ext4  724G  173G  514G  26% /

```

```

From /sys/devices/virtual/dmi/id
Vendor:          NEC
Product:         Express5800/R120i-1M
Product Family: Express5800
Serial:         CN70450X8H

```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
  32x Hynix HMA84GR7CJR4N-XN 32 GB 2 rank 3200, configured at 2666

```

```

BIOS:
  BIOS Vendor:      NEC
  BIOS Version:     U46
  BIOS Date:        04/28/2021
  BIOS Revision:    1.40
  Firmware Revision: 2.44

```

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C          | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
          | 644.nab_s(base)

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_fp_base = 158

Express5800/R120i-1M (Intel Xeon Silver 4316)

SPECspeed®2017_fp_peak = 161

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Jul-2021
Hardware Availability: Jul-2021
Software Availability: Dec-2020

Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 644.nab_s(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
644.nab_s(base)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 644.nab_s(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_fp_base = 158

Express5800/R120i-1M (Intel Xeon Silver 4316)

SPECspeed®2017_fp_peak = 161

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jul-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

Compiler Version Notes (Continued)

| 654.roms_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
628.pop2_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_fp_base = 158

Express5800/R120i-1M (Intel Xeon Silver 4316)

SPECspeed®2017_fp_peak = 161

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jul-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

Base Portability Flags (Continued)

644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries

Fortran benchmarks:

-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

Benchmarks using both Fortran and C:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

644.nab_s: icx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_fp_base = 158

Express5800/R120i-1M (Intel Xeon Silver 4316)

SPECspeed®2017_fp_peak = 161

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jul-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -fiopenmp
-DSPEC_OPENMP -qopt-mem-layout-trans=4
-fimf-accuracy-bits=14:sqrt
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

649.fotonik3d_s: Same as 603.bwaves_s

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)
-prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_fp_base = 158

Express5800/R120i-1M (Intel Xeon Silver 4316)

SPECspeed®2017_fp_peak = 161

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jul-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

Peak Optimization Flags (Continued)

621.wrf_s (continued):

```
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120i-RevE.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120i-RevE.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-07-29 01:05:53-0400.

Report generated on 2023-03-02 11:16:56 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-28.