



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECspeed®2017_fp_base = 258

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

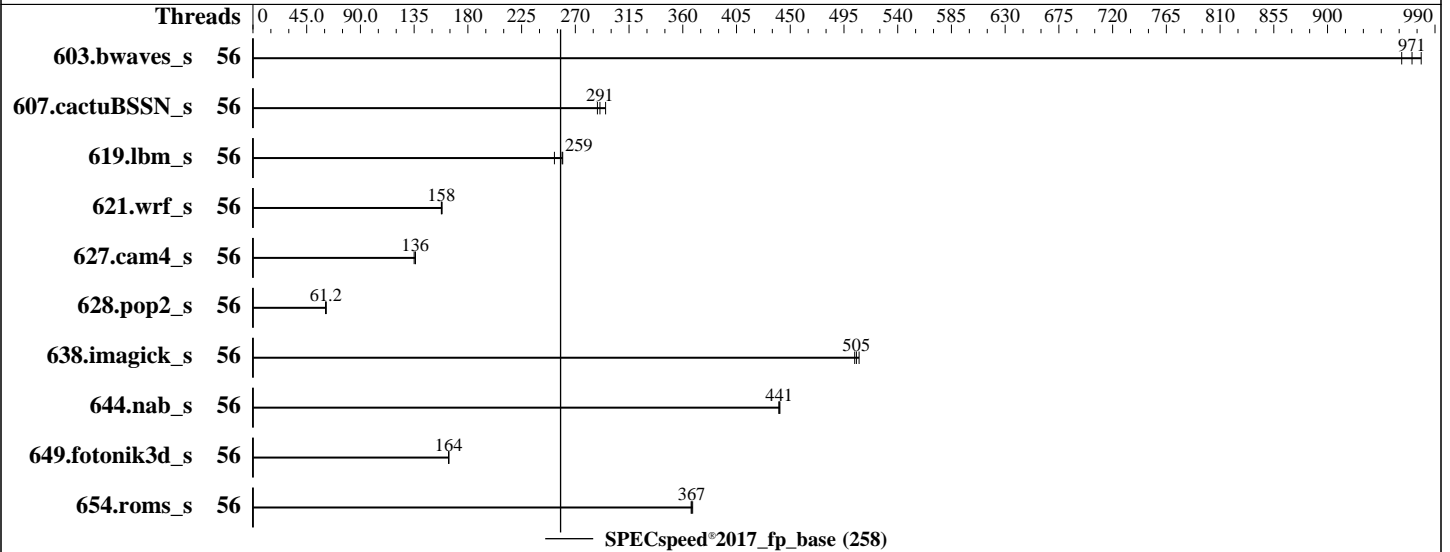

Hardware

CPU Name: Intel Xeon Platinum 8450H
 Max MHz: 3500
 Nominal: 2000
 Enabled: 56 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 75 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86_64)
 Kernel 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler Classic for Linux;
 C/C++: Version 2023.0 of Intel C/C++ Compiler Classic for Linux
 Parallel: Yes
 Firmware: Lenovo BIOS Version ESE109L 1.10 released Jan-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 258

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|---------|--------------------|--------------------|--------------------|-------------------|--------------------|-------------------|---------|---------|-------|---------|-------|---------|-------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 56 | 60.3 | 978 | <u>60.8</u> | <u>971</u> | 61.3 | 962 | | | | | | | |
| 607.cactuBSSN_s | 56 | 56.4 | 295 | <u>57.4</u> | <u>291</u> | 57.8 | 288 | | | | | | | |
| 619.lbm_s | 56 | 20.7 | 252 | 20.2 | 259 | <u>20.2</u> | <u>259</u> | | | | | | | |
| 621.wrf_s | 56 | <u>83.8</u> | <u>158</u> | 83.5 | 158 | 83.8 | 158 | | | | | | | |
| 627.cam4_s | 56 | <u>65.2</u> | <u>136</u> | 65.7 | 135 | 65.1 | 136 | | | | | | | |
| 628.pop2_s | 56 | <u>194</u> | <u>61.2</u> | 195 | 60.8 | 194 | 61.3 | | | | | | | |
| 638.imagick_s | 56 | <u>28.5</u> | <u>505</u> | 28.6 | 504 | 28.4 | 508 | | | | | | | |
| 644.nab_s | 56 | 39.6 | 441 | 39.7 | 440 | <u>39.6</u> | <u>441</u> | | | | | | | |
| 649.fotonik3d_s | 56 | 55.6 | 164 | <u>55.6</u> | <u>164</u> | 55.7 | 164 | | | | | | | |
| 654.roms_s | 56 | <u>42.9</u> | <u>367</u> | 42.8 | 368 | 42.9 | 367 | | | | | | | |

SPECspeed®2017_fp_base = 258

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.9-ic2023.0/lib/intel64:/home/cpu2017-1.1.9-ic2023.0/j
  e5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 258

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Operating Mode set to Custom Mode
CPU P-State Control set to Legacy
Hyper-Threading set to Disabled
DCU IP Prefetcher set to Disabled

Sysinfo program /home/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Feb 7 17:57:05 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
- -----

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 258

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

1. `uname -a`

```
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

2. `w`

```
17:57:05 up 1:14, 1 user, load average: 15.08, 40.75, 47.38
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU   WHAT
root      ttyl    -              16:42      1:12m     0.97s   0.00s  -bash
```

3. Username

```
From environment variable $USER: root
```

4. `ulimit -a`

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 2062669
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2062669
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. `sysinfo process ancestry`

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=56 --tune base -o all --define drop_caches
fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=56 --tune base --output_format all --define
drop_caches --nopower --runmode speed --tune base --size refspeed fpspeed --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2017.025/templogs/preenv.fpspeed.025.0.log --lognum 025.0 --from_runcpu 2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 258

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2023
Hardware Availability: Feb-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.0
```

```
-----
6. /proc/cpuinfo
   model name      : Intel(R) Xeon(R) Platinum 8450H
   vendor_id       : GenuineIntel
   cpu family      : 6
   model           : 143
   stepping        : 8
   microcode       : 0x2b000161
   bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
   cpu cores       : 28
   siblings        : 28
   2 physical ids (chips)
   56 processors (hardware threads)
   physical id 0:  core ids 0-27
   physical id 1:  core ids 0-27
   physical id 0:  apicids 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54
   physical id 1:  apicids
   128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
   80,182
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:     46 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            56
On-line CPU(s) list: 0-55
Vendor ID:         GenuineIntel
Model name:        Intel(R) Xeon(R) Platinum 8450H
CPU family:        6
Model:             143
Thread(s) per core: 1
Core(s) per socket: 28
Socket(s):         2
Stepping:          8
Frequency boost:   enabled
CPU max MHz:       2001.0000
CPU min MHz:       800.0000
BogoMIPS:          4000.00
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 258

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

Flags:

```
fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
```

Virtualization:

VT-x

L1d cache: 2.6 MiB (56 instances)

L1i cache: 1.8 MiB (56 instances)

L2 cache: 112 MiB (56 instances)

L3 cache: 150 MiB (2 instances)

NUMA node(s): 2

NUMA node0 CPU(s): 0-27

NUMA node1 CPU(s): 28-55

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d | 48K | 2.6M | 12 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 1.8M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 2M | 112M | 16 | Unified | 2 | 2048 | 1 | 64 |
| L3 | 75M | 150M | 15 | Unified | 3 | 81920 | 1 | 64 |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-27

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 258

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
node 0 size: 257704 MB
node 0 free: 256822 MB
node 1 cpus: 28-55
node 1 size: 257986 MB
node 1 free: 255927 MB
node distances:
node 0 1
  0: 10 21
  1: 21 10
```

```
-----
9. /proc/meminfo
   MemTotal:      528067920 kB
```

```
-----
10. who -r
    run-level 3 Feb 7 16:42
```

```
-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
    Default Target Status
    multi-user      running
```

```
-----
12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
enabled           YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance iscsi
                  issue-generator kbdsettings klog lvm2-monitor nsd postfix purge-kernels rollback rsyslog
                  smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime   systemd-remount-fs
disabled          autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                  chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                  firewallld gpm grub2-once haveged-switch-root ipmi ipmievad iscsi-init iscsid iscsiuiio
                  issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb rdisc
                  rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts smb snmpd snmptrapd
                  systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                  systemd-time-wait-sync systemd-timesyncd udisks2
indirect          wickedd
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
    root=UUID=cf0c8526-2665-4565-b656-0513c168d1bb
    splash=silent
    mitigations=auto
    quiet
    security=apparmor
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECspeed®2017_fp_base = 258

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

-----
14. cpupower frequency-info
   analyzing CPU 0:
     current policy: frequency should be within 800 MHz and 2.00 GHz.
                       The governor "performance" may decide which speed to use
                       within this range.
   boost state support:
     Supported: yes
     Active: yes

```

```

-----
15. sysctl
   kernel.numa_balancing          1
   kernel.randomize_va_space     2
   vm.compaction_proactiveness    20
   vm.dirty_background_bytes     0
   vm.dirty_background_ratio     10
   vm.dirty_bytes                 0
   vm.dirty_expire_centisecs     3000
   vm.dirty_ratio                 20
   vm.dirty_writeback_centisecs  500
   vm.dirtytime_expire_seconds   43200
   vm.extfrag_threshold           500
   vm.min_unmapped_ratio         1
   vm.nr_hugepages                0
   vm.nr_hugepages_mempolicy     0
   vm.nr_overcommit_hugepages    0
   vm.swappiness                  60
   vm.watermark_boost_factor     15000
   vm.watermark_scale_factor     10
   vm.zone_reclaim_mode          0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
   defrag          always defer defer+madvice [madvice] never
   enabled         [always] madvice never
   hpage_pmd_size 2097152
   shmem_enabled  always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs  60000
   defrag                  1
   max_ptes_none           511
   max_ptes_shared        256
   max_ptes_swap           64

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 258

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

19. Disk information

SPEC is set to: /home/cpu2017-1.1.9-ic2023.0
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 446G 80G 366G 18% /

20. /sys/devices/virtual/dmi/id

Vendor: Lenovo
Product: ThinkSystem SR650 V3 MB,EGS,DDR5,SH,2U
Product Family: ThinkSystem
Serial: 1234567890

21. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
9x Samsung M321R4GA3BB0-CQKEG 32 GB 2 rank 4800
7x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo
BIOS Version: ESE109L-1.10
BIOS Date: 01/07/2023
BIOS Revision: 1.10
Firmware Revision: 1.0

Compiler Version Notes

C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECspeed®2017_fp_base = 258

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Dec-2022

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 258

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```

Fortran benchmarks:

```

-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```

Benchmarks using both Fortran and C:

```

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 258

ThinkSystem SR650 V3
(2.00 GHz, Intel Xeon Platinum 8450H)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-N.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-N.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-07 04:57:04-0500.
Report generated on 2023-03-02 11:26:08 by CPU2017 PDF formatter v6442.
Originally published on 2023-02-28.